

Feel the
*g*love

2016

PRODUCT CATALOGUE PROTECTIVE GLOVES

A variety of work gloves are arranged in a circular pattern on a light gray concrete floor. The gloves include black, blue, yellow, green, white, and silver models, some with orange accents. Brands like 'TEGERA' and 'wrist' are visible on some gloves. A large silver heat-resistant glove is also present.

Be *g*loved

At the heart of safety you'll find care and protection.
With high-quality gloves that protect and stand the
test of time, TEGERA® gloves are available for most
job situations. Be gloved by TEGERA®.

TEGERA®- You're in good hands

TEGERA® is able to provide cutting-edge hand protection thanks to a long experience and an unrelenting dedication to innovative solutions that will prevent injuries before they happen.

We understand the hand as an advanced and important tool that you only have one pair of. That's why we aim to exceed safety standards and will push forward with product developments, research collaborations and embracing insights from our customers. TEGERA® products will continue to evolve as new knowledge comes to light.

We continuously works with critical areas such as grip, chemical resistance, cut protection and thermal insulation; always hand in hand with ergonomics and comfort with the target to deliver hand protection with pride.

The design and development of TEGERA® products has been done in Leksand, Sweden, since 1949.





TEGERA® PRODUCTS RANGE FROM FINE PRECISION GLOVES WITH HIGH BREATHABILITY TO WELL-INSULATED CHEMICAL-RESISTANT GLOVES FOR TOUGH ENVIRONMENTS.

WHAT ALL TEGERA® GLOVES HAVE IN COMMON IS OUR FUNDAMENTAL AMBITION TO REMAIN AT THE FOREFRONT OF INNOVATIVE HAND PROTECTION.

WE DEVELOP OUR OWN HAND MOULDS TO ENSURE PERFECT CONSISTENCY IN FIT, QUALITY AND ERGONOMIC FEATURES.

WE CONTROL THE MIXTURE OF MATERIALS TO SUIT DIFFERENT WORK APPLICATIONS AND TO MAXIMISE DEXTERITY, GRIP, DURABILITY AND COMFORT.





HAND- PROTECTION

PROTECT YOUR HANDS 9

WORK GLOVES 30

WORK GLOVES – GENERAL HANDLING 34

SPECIAL REQUIREMENTS GLOVES 78

ESD GLOVES 83

CUT RESISTANT GLOVES 86

CUT RESISTANT SLEEVES 97

THERMAL GLOVES 100

COLD INSULATION GLOVES 103


HEAT PROTECTION GLOVES 119

WELDING GLOVES 124

DISPOSABLE AND/OR CHEMICAL
RESISTANT GLOVES 130

DISPOSABLE AND/OR CHEMICAL RESISTANT GLOVES 136

REGISTER 156

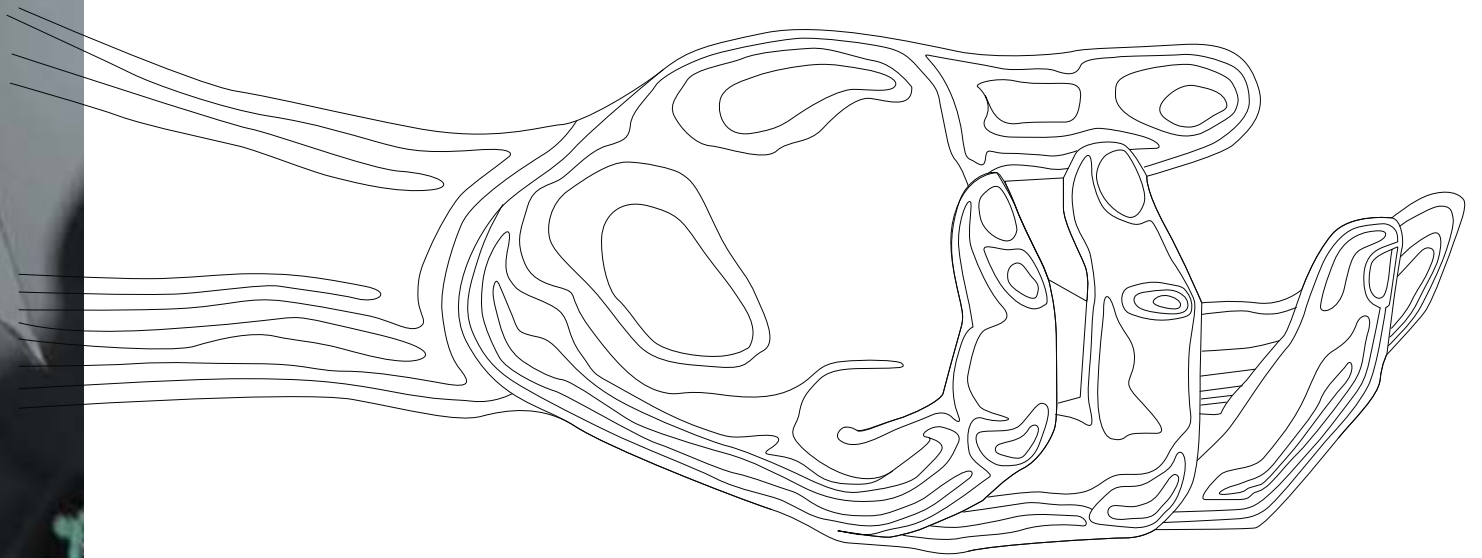

Protect your hands

Our product range gives you the choice of many different types of gloves, which are suitable for a wide variety of work tasks. Using proper gloves is crucial, and we will provide you with the right glove for the right job.

Our work gloves are the result of extensive research and advanced construction technology. They combine the ability to protect with an attention to ergonomics that allows the hands to carry out their tasks. The material and manufacturing method are crucial to a glove's protective properties.

Unprotected hands are exposed to many dangers that can cause cutting and mechanical damage. Injuries to the hands can also be caused by heat and cold. Chemicals can cause corrosion damage, eczema, cancer and damage to the internal organs if the correct protective gloves are not used.

Our publication Handbook, by researcher Dr. Olle Bobjer contains a lot of good advice on how to protect your hands.



Rules, standards and CE markings

If a protective glove is deemed to meet the safety requirements and is given a CE mark in an EU country, it can be exported and sold throughout the EU zone. To meet the requirements, the manufacturer has to comply with a number of EN standards. An EN standard includes demands, testing methods and requirements as to how the product is to be labelled in addition to the CE mark, and also sets out what the manufacturer's instructions for use must contain.

EXPLANATION OF THE RISK CATEGORIES

EU Directive 89/686/EEC divides personal protective equipment into three categories, depending on the level of risk involved. The greater the risk to which the user is exposed, the tougher the test requirements are concerning the gloves' protective ability and certification. Since the EU Directive regulations are framed in general terms, European standards have been developed that specify requirements, test methods and marking instructions. One such standard is EN 420, which lists general requirements for protective gloves.

CATEGORY I / SIMPLE DESIGN

This category covers gloves used for work with minimum risks that can be identified in good time. This includes for instance gloves with less stringent requirements as to mechanical durability and gloves that are required to protect against hot objects. Gloves of a more basic type such as gardening gloves and assembly gloves belong in this category. The manufacturer must be able to show that the product meets the basic requirements for protective gloves (in accordance with EN 420), and is responsible for guaranteeing the CE marking. This applies to all protective gloves.

CATEGORY II / INTERMEDIATE DESIGN

Many protective gloves belong in this category, such as gloves where the requirements include mechanical durability to protect against, for example blade cuts. If gloves are to be given a CE mark, the manufacturer must be able to show that the product meets both the basic requirements and further standards that may apply to specific areas of use, such as welding gloves. The gloves must be tested by an approved laboratory and be type-approved by a notified body that issues certificates. Gloves in Category II must be marked with a pictogram, i.e., a symbol showing what the glove has been tested against and at what performance level. If the glove is intended to protect against mechanical risks (in accordance with EN 388), a four-figure code is shown beside or beneath the pictogram. These figures denote performance levels from tests against abrasion, blade cuts, tearing and puncture.

CATEGORY III / COMPLEX DESIGN

These gloves can offer protection against things like highly hazardous substances. They are required to protect against permanent damage in situations where the user may have difficulty detecting the risks in time. This includes for instance gloves that protect against heat (above +100°) and extreme cold (below -50°) and gloves used for handling most chemicals. The gloves must be tested by an approved laboratory and be type-approved by a notified body. A further requirement is a yearly inspection of the production process and the gloves will be properly checked to ensure the right quality. Not until this is done may the gloves be given a CE mark. The notified body's identity code (four figures) is to be placed directly after the CE mark, i.e. CE 0123.

PROTECTIVE GLOVES – GENERAL REQUIREMENTS AND TEST METHODS (EN 420)

Summary of the requirements

- The gloves must have been made so as to provide the protection they are intended for.
- The seams and edges must not cause harm to the user.
- The gloves must be easy to put on and take off.
- The material must not harm the user.
- The pH of the gloves should be between 3.5 and 9.5.
- Chromium (VI) content should be below 3 mg/kg in leather gloves.
- The manufacturer must state whether the glove contains substances that may cause allergies.
- The protective quality of the glove must not be affected if the washing instructions are followed.
- The gloves must allow maximum finger mobility (dexterity), given the need for protection.

Size	Circumference of hand (mm)	Length (mm)	Minimum length of glove (mm)
6	152	160	220
7	178	171	230
8	203	182	240
9	229	192	250
10	254	204	260
11	279	215	270

It is important to choose the right glove size (see table above). Using gloves that are too large may increase the risk of accident. The sizing system in the above table is based on hand size, i.e., circumference and length. The standard also specifies requirements for resistance to water penetration, which is measured where necessary. In the case of anti-static gloves, special rules apply.

MARKING REQUIREMENTS

Each glove is to be marked with:

- The name of the manufacturer.
- The designation, e.g., TEGERA® 9232.
- The size.
- The CE mark.

Gloves belonging to Category II and Category III must also be marked with the following:

- A pictogram denoting the type of risk that the glove has been tested for.
- The performance level and the reference to the relevant EN standard, e.g. 388, next to the pictogram.
- The four-figure code after the CE mark (only applies to protective gloves in Category III – High Risk).

REQUIREMENTS CONCERNING INSTRUCTIONS FOR USE



This pictogram shows that instructions for use are included with the gloves' packaging. The instructions should be readily available at the workplace and contain:

- The name and address of the manufacturer or representative.
- The glove and size designation.
- Reference to the EN standard that the glove has been tested against.
- An explanation of the pictogram and the mark.
- Information on substances in the glove that may cause allergies.
- Care & storage instructions.
- Guidance on disposal of the glove after use.
- Instructions on limitations of use.
- Warnings concerning any mechanical or thermal risks and/or chemical health hazards.
- Information on which chemicals have been tested and up to which level (applies to chemical protection gloves). Refers to the chemicals that form the basis for certification; others are available separately.

PROTECTIVE GLOVES AGAINST MECHANICAL RISKS (EN 388)



This pictogram shows that the glove is intended to give protection against mechanical hazards. In order to be marked with this pictogram, the glove must be tested in accordance with standard EN 388 and must be approved by a notified body. Here, the glove's resistance to abrasion, cutting, tearing and puncture is tested. These particular properties have been chosen since they largely reflect reality. After the tests, the glove is given a performance level rating for each and every one of the mechanical risks listed. This rating is on the scale of 1-5. The highest rating is 4 or 5. The glove is marked with the rating figures from the test and the numerical code is displayed alongside the pictogram. The glove's ability to protect against mechanical risks of various kinds is tested in the following ways:

A. Resistance to wear

The material of the glove is abraded with sandpaper under pressure and the number of cycles required to wear a hole in the material is measured. The highest performance level is 4, which corresponds to 8,000 cycles.

B. Resistance to cutting

Here, the test involves measuring the number of cycles required for a circular knife rotating at constant speed to cut through the glove. The result is compared with a reference material and an index figure is established. The highest performance level is 5, which corresponds to an index of 20.

C. Tear resistance

An incision is made in the glove material. The amount of force required to tear the material apart is then measured. The highest performance level is 4, which corresponds to a force of 75 N.

D. Puncturing resistance

The test involves measuring the amount of force required to pierce the glove with a standard sized point and at a given speed (10 cm/min). Here, the highest performance level is 4, which corresponds to a force of 150 N.

Property	(Maximum performance)
A) Resistance to wear (No. of revolutions)	(4)
B) Resistance to cutting (Index)	(5)
C) Tear resistance (Newton)	(4)
D) Puncturing resistance (Newton)	(4)

Level of protection	1	2	3	4	5
A) Resistance to wear (No. of revolutions)	100	500	2000	8000	
B) Resistance to cutting (Index)	1,2	2,5	5,0	10,0	20,0
C) Tear resistance (Newton)	10	25	50	75	
D) Puncturing resistance (Newton)	20	60	100	150	

The table shows what requirements apply at each performance level.

WARNING If you work with moving machine parts, choosing a glove that is the right size and made from a less durable material is vital, since the glove easily tears apart if you get caught in the machinery.

THE MARKS YOU MEET ON OUR CHEMICAL PROTECTION GLOVES (EN 374)



Gloves approved in accordance with EN 374 are always marked with the pictogram on the left and with one of the three pictograms on the right. If the product complies with an earlier version of the standard (1994), the pictogram at the far right is included.

Penetration testing – is the glove leakproof?



Gloves that are to give protection against microorganisms and chemicals must be impenetrable (without holes). In the case of

EN 374-2:2003 thin, disposable gloves, penetrability is tested by filling the glove with water or air. If the water or air leaks out the glove is deficient. The results are expressed in terms of the highest number of deficient gloves per hundred, described as the acceptable quality level (AQL). Level 2 is the lowest acceptable level for the pictogram on the left.

Penetration	AQL
Level 1	< 4,0
Level 2	< 1,5
Level 3	< 0,65

Permeation testing – how rapidly does the chemical penetrate??



EN 374-3:2003

Gloves designed to protect against chemicals and which are marked with one of the pictograms to the left must first undergo a penetration test.

Permeation is measured in terms of break-through time, which is the time it takes for a chemical to penetrate the glove material. For the lowest level, Level 1, the time is at least 10 minutes. The highest level is Level 6, for which the breakthrough time is at least eight hours.

Permeation	Breakthrough time
Level 1	10 min
Level 2	30 min
Level 3	60 min
Level 4	120 min
Level 5	240 min
Level 6	480 min



EN 374-3:2003



**EN 374
AHL**

This pictogram shows that the glove gives protection against three chemicals from the Chemical List EN 374 table for at least 30 minutes (Level 2). The three-letter code accompanying the pictogram shows which chemicals are involved. The glove may also have been tested against other chemicals besides those in the table. Which chemicals it has been tested against, and which breakthrough times apply, is specified in separate information. Contact your seller.

EN 374-3:2003 "Chemical List"

Code	Chemical	Cas number
A	Methanol	67-56-1
B	Acetone	67-64-1
C	Acetonitrile	75-05-8
D	Dichloromethane	75-09-2
E	Carbon disulphide	75-15-0
F	Toluene	108-88-3
G	Diethylamine	109-89-7
H	Tetrahydrofuran	109-99-9
I	Ethyl acetate	141-78-6
J	n-Heptane	142-85-5
K	Sodium hydroxide 40%	1310-73-2
L	Sulphuric acid 96%	7664-93-9



EN 374-3:2003

This pictogram from EN 374:2003 means that the glove has failed to attain Level 2 in the permeation test for three of the chemicals in the table. But the glove may have coped with fewer chemicals or a shorter breakthrough time than 30 minutes. Or it may have been tested against other chemicals besides those in the table. Which chemicals it has been tested against, and which breakthrough times apply, is specified in separate information.

WARNING Heat and wear affect the glove's resistance to chemicals. A glove that gives protection against one chemical may perform poorly in relation to another.

IMPORTANT All gloves must be thrown away (in the hazardous waste bin if required) no more than 8 hours after initial contact with the chemical.

PROTECTIVE GLOVES AGAINST THERMAL RISKS (HEAT AND/OR FIRE) (EN 407)



This standard specifies thermal performance for protective gloves in relation to heat and/or fire. These risks mainly involve contact with strong heat generated as a result of combustion, radiation or molten metal. Gloves marked with this pictogram show that they give protection against one or more of the thermal risks. What the glove protects against (A-F in the right-hand column) and up to what performance level (1-4) must be stated next to the pictogram. The gloves are required to attain at least Level 1 for abrasion resistance and tear resistance in accordance with EN 388.

THE TEST COVERS:

A. Resistance to burning behavior

Here, the test involves measuring the time it takes for the glove material to stop burning and glowing after being exposed to a gas flame for 15 seconds. The highest performance level is 4, which represents an afterburn time of no more than two seconds and an afterglow time of no more than five seconds. If the glove risks coming into contact with fire, it must attain at least Level 3.

B. Contact heat resistance

The test involves measuring the temperature range (100°C–500°C) at which the glove gives protection for 15 seconds without the inside of the glove becoming ten degrees hotter. The highest performance level is 4, which means the glove can withstand +500°C.

C. Convective heat resistance

(= gradually penetrating heat) This is based on the length of time the glove is able to delay the transfer of heat from a flame to the extent that the temperature on the inside increases by 24 degrees. The highest performance level is 4.

D. Radiant heat resistance

The glove is exposed to heat radiation. The test involves measuring the time it takes for a given amount of heat to penetrate the glove. The highest performance level is 4, which means that the glove gives protection for at least 95 seconds.

E. Resistance to small splashes of molten metal

Here, the test involves measuring how many drops of molten metal are needed to increase the temperature between the glove material and the skin by 40°C. The highest performance level is 4, which corresponds to 35 drops or more.

F. Resistance to large quantities of molten metal

This test shows how many grams of molten iron are required to damage synthetic skin (PVC) attached to the inside of the glove material. The highest performance level is 4, which corresponds to 200 grams of liquid metal.

EN 407 - Testing

Level of protection	1	2	3	4
A. Burning behaviour (s) After flame time After glow time	≤20 no requirement	≤10 ≤120	≤3 ≤25	≤2 ≤5
B. Contact heat (s)	100°C ≥15	250°C ≥15	350°C ≥15	500°C ≥15
C. Convective heat (s)	≥4	≥7	≥10	≥18
D. Radiant heat (s)	≥7	≥20	≥50	≥95
E. Small splashes of molten metal (no)	≥10	≥15	≥25	≥35
F. Large quantities of molten metal	30	60	120	200

WARNING The glove must not come into contact with fire if it does not attain performance level 3 when tested for resistance to flammability.

PROTECTIVE GLOVES



AGAINST COLD (EN 511)

Gloves carrying this pictogram meet the requirements for protection against cold.

The performance level attained by the glove is stated next to the pictogram. Gloves giving protection against cold are tested for two different cold situations: penetrating or convective cold (a) and contact cold (b), i.e., direct contact with cold objects. In both cases, the highest performance level is 4. Testing resistance to permeability by water (c) is done when relevant. There are two ratings here: 0 and 1. If no water has penetrated after 5 minutes the glove is marked with a 1 as the last number in the code beside the pictogram. Otherwise the rating is 0.

The pictogram may only be used for gloves that have attained performance level 1 for convective cold or contact cold. An X means that it is not relevant to test the glove for permeability by water. All gloves must attain at least performance level 1 for abrasion resistance and tear resistance under EN 388. In the case of extreme cold, the requirements concerning mechanical resistance are stricter. From Level 2 upwards, the gloves have to attain at least performance level 2 for abrasion resistance and tear resistance.

EN 511 - Testing					
Level of protection	0	1	2	3	4
A. Convective cold (isolation ITR/m ²)	I<0,10	0,1<I <0,25	0,15<I <0,22	0,22<I <0,30	0,30<I
B. Contact cold (termic resistance R/m ²)	R<0,025	0,025<R <0,050	0,050<R <0,100	0,100<R <0,150	0,150<R
C. Water penetration, 30 min	penetration	no penetration			

GLOVES SUITABLE

FOR CONTACT WITH FOODSTUFFS

The EU's framework regulations for materials with contact with foodstuffs EC/1935/2004 establish general guidelines for all materials that may come into contact with food, including gloves. The materials used may not alter the food to such an extent that human health is at risk. Nor may the materials cause any unacceptable change in the composition of the food products or affect their taste and smell.

The EU regulation on materials in contact with food

Regulation 10/2011 replaced several previous directives but only applies to plastics. In the case of other materials, such as rubber, no regulations have been introduced as yet; instead, member states are referred to the recommendations of the German BfR, Das Bundesinstitut für Risikobewertung.

All materials are analysed in order to gauge the extent to which substances are transferred – migrate – from gloves to food of one kind or another. The food is divided into different groups, such as aqueous, acidic, alcoholic and fatty. Additional groups are listed in Regulation 10/2011. In the migration analysis, a simulant is used that resembles each food group. A glove material can be tested against one or more groups.

Food product group	Simulator	Examples of foodstuffs
Aqueous	Distilled water	Vegetables, drinks, etc. with pH>4.5
Acidic	3% acetic acid	Juice, fruit pieces, sauces, dressings, etc. with pH<4.5
Alcoholic	10 % alcohol	Wine, vinegar
Fatty	Olive oil or another equivalent simulator	Butter, cheese, meat, fish, fowl, chocolate, etc. Specific so-called reduction factors applicable to various foodstuffs



Gloves that have been approved for handling foodstuffs are marked with the 'fork and glass' pictogram. It should be noted that the gloves may be suitable for some food groups but not for others. Contact your seller if you need further information. Tests for fatty foods use simulants equivalent to 100% fat, but the actual fatty content of foodstuffs may vary. For this reason, the migration test results are divided by a fat reduction factor (FRF) of 2-5, to reflect different foods. In the case of meat, for instance, the test result for fatty foods is divided by 4 (FRF 4). The figure thus obtained must be below the set limit of 10 mg/dm² for a glove to be approved. The test is conducted for a specific length of time and at a specific temperature. In the case of rubber materials this is 10 minutes at 40°C.

- Migration from the glove material to the food simulant may not exceed 10 mg/dm² of material.
- Specific limits are enforced for certain special substances and additives in materials that come into contact with food.



How to choose, use and look after your protective gloves

In this section, we provide tips and guidance on how to choose, use and look after your gloves and also on how to dispose of them afterwards.

CHOOSING GLOVES

- Risk assessment.
- Assessment of protection needs.
- Choice of protective gloves.



1. RISK ASSESSMENT

Start by examining what risks may be present or may develop in the work environment. This makes it easier to choose the right gloves and to prevent employees from being harmed, falling ill or suffering some other kind of

detriment.

- Sharp objects are the most common cause of hand injuries.
- Work involving hot objects, hot liquids or welding – or work in an environment with radiant heat or molten metal droplets – can cause severe burns.
- Work in extreme cold or work involving liquid gas can cause frostbite.
- Chemicals can cause damage to the inner organs via skin absorption, or to the skin itself through corrosion and hypersensitivity (sensitisation), and can also cause cancer, reduce fertility and damage the gene pool.
- Biological risks can be harmful to health.
- Moving machine parts can cause severe crushing.
- Vibrating machinery and tools can cause vibration injuries.



2. ASSESSMENT OF PROTECTION NEEDS

Based on the risk assessments and the job to be done, a suitable protective glove is chosen. The following steps are used:

- Quantify the risks.
- Decide how much arm/hand needs to be protected + size.
- Decide the performance level, based on the relevant EN standard.

THE SAFETY DATA SHEET is a document containing information on things like health and environmental hazards and other aspects connected with certain chemical products and substances. For professional uses, a safety data sheet is mandatory, even for prepackaged products.



3. CHOICE OF PROTECTIVE GLOVES

Whether the protection requirements are met depends entirely on the glove's material properties. This is why the result of the materials testing in accordance with the relevant standard is of prime importance when choosing protective gloves. Other important factors are:

- A good fit – right size and design.
- Tactile properties – ability to feel objects.
- Freedom of movement – suppleness of the material.
- Comfort – whether the glove is comfortable and warm/cool enough.

When choosing your glove, you should decide how resistant it needs to be to one or more of the following factors:

- Abrasion, blade cuts, puncture, heavy wear.
- Cold.
- Heat.
- Relevant chemicals, electrostatic charges or microorganisms.

Our publication, 'Are you using the right protective gloves?', contains valuable guidance on chemicals protection. If you should get lost in our extensive range of products, we can help you find the right ones.

USER INSTRUCTIONS



The instructions for use that accompany the package contain important information for the user. These instructions should therefore be readily available at the workplace.



LOOKING AFTER YOUR GLOVES

If protective gloves are re-used, they must be inspected. Are they clean and whole? Have they lost their protective properties? The instructions for use must show how the gloves are to be cleaned, dried and stored; they should also be clean inside.

If the gloves have been used for dealing with hazardous chemicals, they should be thrown away at the end of the working day – or earlier.

Gloves should be stored in such a way that their protective properties are kept intact. Some glove materials, such as natural rubber, have a limited storage time.



GLOVES AS WASTE

There should be set procedures for how gloves are to be used at the workplace, and also for how they are to be disposed of as waste. The gloves are in fact combustible but the way they have been used may affect their disposal. Special environmental rules apply in the case of gloves used to handle hazardous chemicals.

Avoid hand injuries

If you injure your hands, your quality of life deteriorates and it may take a long time for you to recover. But with the right hand protection you can minimise the risk of injury. Under the PPE Directive (Personal Protective Equipment), employers are required to familiarise themselves with the work environment legislation that applies to their activities. They are required for instance to carry out risk assessments so as to ensure that employees are given suitable protective equipment and that things like chemical management are safe. Always use gloves that specifically fit your hands and the environment in which you work.

BLADE CUTS When handling machine parts or tools with sharp edges, you can easily suffer a cut. Unprotected cutting edges on machine tools and hand tools are also a major risk.

VIBRATION INJURIES People working with hand-held vibrating machines and tools can suffer vibration damage. These injuries develop gradually and may be incurable. People working with strongly vibrating equipment may also experience problems with neck and upper shoulder pains that spread down into the arms and hands. Pain in the shoulder blades and elbows are also commonplace.

CRUSHING INJURIES involve the mechanical overburdening of the fingers' bones and tissue. Even when the hand is only slightly crushed, blood vessels can burst. Muscles, tendons, blood vessels and nerves may also be crushed. A crushing injury often occurs when a glove gets caught in moving parts of a machine. If you work on moving machine parts, choosing a glove that is the right size and made from a less durable material is vital – the glove easily tears apart if you get caught. The test results in EN 388 can serve as a useful guide in finding the right kind of glove.

FROSTBITE When the air temperature is below +10°C, you can suffer frostbite. The risk increases in the presence of wind and damp. Direct contact with cold surfaces chills the hand severely. People who work outdoors in the cold are particularly vulnerable, but those working in cold environments indoors, e.g., in the food industry, are also at risk.

BURN INJURY A major burn injury is one of the biggest traumas a person can be exposed to. Many burns heal spontaneously but major injuries result in lifelong scarring. Always wear gloves during hot work, whether you work in a canteen kitchen or in industry.

HYPERSENSITIVITY/ALLERGY Hypersensitivity is when someone repeatedly displays symptoms in reaction to things around them that most other people do not react to. Allergies are an acquired hypersensitivity to a particular substance. Some occupational groups are more exposed than others to substances that cause hypersensitivity and allergies. With the right protective gloves, problems can be avoided or eased.



What will the glove be used for?

Before buying work gloves you have to know what they'll be used for. Do you need a glove for precision work or for cruder tasks? A glove that gives protection from heat or cold? Or that protects you from vibration or blade cuts? However good the glove is – if you want the best possible protection you need to choose the correct size and make sure the glove is suitable for the work in hand

PRECISION WORK

For precision and assembly work, your fingers need freedom of movement. The gloves must be supple, flexible and ergonomically sound.

ALLROUND WORK

You need hardwearing gloves in a durable material. At the same time, they must be supple and comfortable to wear.

HEAVY WORK

You work with rough materials so you need gloves made from strong, hardwearing materials.



Colour coding

The inclusion of this colour coding on the glove label, on the packaging or on the edging makes it easier for you to find your size quickly.

Please note: Brands other than TEGERA® may have different colour coding.

	Size 4
	Size 5
	Size 6
	Size 7
	Size 8
	Size 9
	Size 10
	Size 11
	Size 12
	Size 13
	Size 14
	Size 15



Understanding materials

Both the material and the manufacturing method are of crucial importance in determining a glove's level of protection. Every detail in a TEGERA® glove is carefully considered in terms of comfort, safety and ergonomics. There are plenty of cheap copies on the market that both feel and look credible. Our gloves are thoroughly tested. This is why they deliver what they promise.

SYNTHETIC LEATHER – A SUPERMATERIAL

Synthetic leather is a high-tech material. We have come a long way in our development work and can now produce specially tailored gloves for many different tasks, often in collaboration with our customers. But our journey is not finished yet. New challenges await. Test us!

Many TEGERA® gloves are made from Microthan® and Macrothan® – two high-tech synthetic materials that are superior to natural leather in many respects. They are thin and strong, which means the gloves are hardwearing, supple and display fingertip sensitivity. The suppleness of the material also allows for a sophisticated ergonomic design, enhancing both safety and comfort. Microthan® and Macrothan® are only found in TEGERA® gloves. They are also chrome-free.



MICROTHAN® is flexible and durable. Its foremost feature is the superb grip it provides. Microthan® is a synthetic material comprising a polyurethane coating with a knitted nylon backing.

MICROTHAN®+ has the same excellent properties as Microthan® but is thicker and has a grooved surface. As a result, the material is highly durable and provides better grip.


MACROTHAN® is ideal for both work gloves and assembly gloves. The material consists of soft polyurethane and microfibre. Macrothan® comes in various thicknesses. The material breathes, which makes the gloves pleasant to work with, even during long shifts.

MACROTHAN®+ is a highly flexible and breathable material. It contains silicone, making it very durable. Suitable for work that puts very high requirements on strength, fit and handling.

VIBROTHAN® is a specially designed foam-based material that reduces vibrations.

IMPACTOTHAN® is a specially designed dampening material that distributes force of impact across the whole hand.

POLYTHAN® consists of a polyester core with twisted polyester fibres and PU for extra strength and spandex for elasticity. The material is extremely durable and has excellent breathability. Thanks to its softness, Polythan® offers a very high level of comfort. Chrome-free.

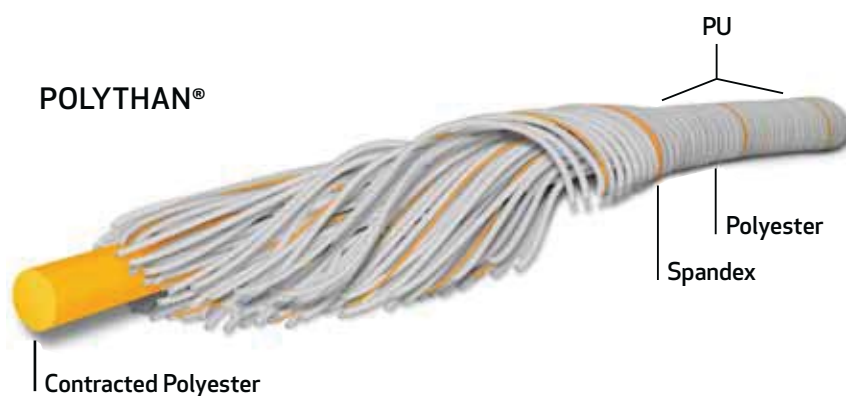

OTHER

AQUATHAN® is a membrane that allows excess heat and moisture to escape from your body whilst preventing liquids from getting in. The membrane is wind and water proof.

GRIPFORCE® is a collective term for TEGERA® technologies and unique solutions that guarantee an extremely good grip. The grip is central to the function and use of the glove. A glove marked GripForce® ensures extraordinary grip

LEATHER

Leather is strong, easily shaped and supple. It also adapts to changes in temperature.


All TEGERA® leather gloves are manufactured from carefully selected and carefully tanned hides to ensure the highest possible durability and flexibility. We also supply chrome-free leather gloves.

Hide has different qualities depending on the part of the animal from which it comes.

The back and shoulders of an animal produce very strong leather, while the flanks produce softer leather. Before processing, the hide is split into two layers. The outer layer is referred to as full-grain or nappa, while the inner layer is called split-grain.

FULL-GRAIN OR NAPPA is durable, soft, flexible and moisture-resistant. This means that it is ideally suited for making assembly gloves where high levels of fingertip sensitivity and comfort are required.

SPLIT-GRAIN LEATHER has a coarser surface than full-grain leather. It is also heat-resistant and available in many thicknesses. Split-grain leather is ideal for work gloves meant for tougher jobs and where a good grip is required. Often used in welding gloves due to its insulating properties, it is flexible despite its thickness.

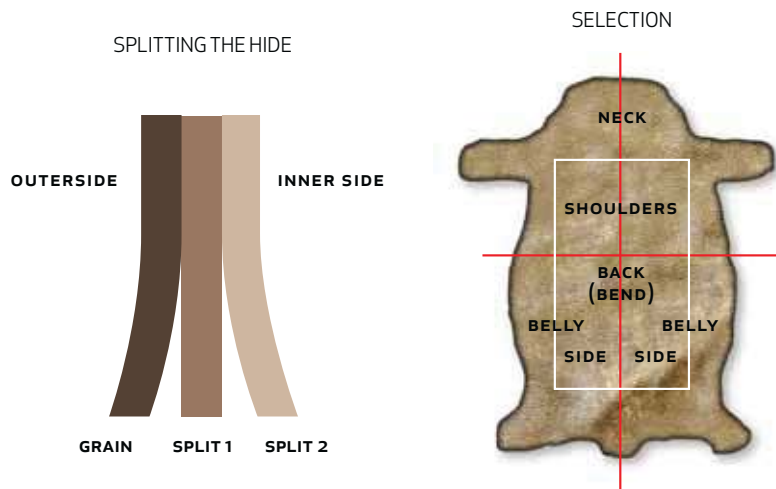

COWHIDE is very durable and resistant to rough use. A glove of thick, split-grain cowhide is an excellent alternative, even for handling hot objects.

GOATSKIN is thin, supple and durable. A goatskin glove therefore is ideal for both demanding jobs and work requiring fingertip sensitivity – the glove conforms to the movements of the hand.

PIGSKIN is excellent for general use. The material breathes and the gloves become softer and more comfortable with use.

OXHIDE from specially selected hides is generally of higher quality than cowhide. Oxhide gloves are therefore a good choice for both lighter and tougher jobs.

TEXTILE MATERIALS

Textiles are not only found in textile gloves but are also common on the upper surface of leather gloves. While a textile glove is rarely exposed to the same wear and tear as a leather work glove, the choice of material is often crucial to both safety and comfort. Textiles can consist of both natural and synthetic materials.

KNITTING GAUGE (GG) refers to the number of stitches per inch in a garment. A lower number translates into a thicker glove suitable for rougher uses. A higher number means a thinner glove for precision work.

THE MAIN FEATURES OF SYNTHETIC FIBRES

- Available in different varieties.
- Good strength.
- High stretchability and elasticity.
- Good dyeing properties.
- High crease resistance.
- Low moisture absorption.
- Prone to electrostatic charge.
- Pilling formation tendencies increase when mixed with other fibre materials.

MAIN FEATURES OF COTTON

- High comfort.
- Good strength.
- Low stretchability.
- Good moisture absorption.
- Inclined to shrink.
- Burns like paper and cellulose, does not melt.



POLYESTER is a strong, stretchable, shrinkproof synthetic fibre that doesn't absorb moisture. It is widely used and has many varieties. Good strength, good abrasion resistance and high resistance to light.

ACRYLIC is a synthetic fibre which can retain air, meaning that it has good thermal insulation properties. It is often used as an alternative to wool in linings. Very high resistance to light, heat sensitive. Soft feel, resembles wool, moderate resistance to wear.

NYLON is a synthetic fibre that is very strong, flexible and elastic. Poor moisture absorption.

PARA-ARMID, also known as aromatic polyamide, is about four times as strong as ordinary polyamide. The material is extremely heat-resistant and difficult to ignite. A well-known brand is DuPont™ KEVLAR®.

VISCOSE is a synthetic fibre made from cellulose. It has the same kinds of properties as cotton: it absorbs moisture well, is soft and comfortable. There are different types of viscose depending on manufacturing method and raw material: Viscose, Modal and Lyocell.

BAMBOO VISCOSE Bamboo viscose is made from bamboo. It absorbs moisture well and transports it away from the feet. It is extremely comfortable and soft against the skin.

MODAL Modal is a type of viscose fibre with even better properties than regular viscose: it is stronger and has better wet strength yet remains as soft and smooth. We use Lenzing Modal® which is a modal fibre made from beech wood. It absorbs moisture well and transports moisture away efficiently.

UHMWPE/HPPE – Ultra High Molecular Weight Polyethylene/High Performance Polyethylene – an extremely strong and light polyethylene fibre used for instance in gloves that protect against cutting injuries. A well-known brand is Dyneema® and Dyneema® Diamond Technology.

COTTON is often used for textile gloves and for the back of leather gloves. It can be woven or knitted (tricot). Cotton is often sufficient for gloves designed for light jobs.



DIPPING MATERIALS

Dipping method varies to fit different work applications, fingertip dip, palm dip, $\frac{3}{4}$ dip, full dip, double dip.

POLYURETHANE, PU is an extremely durable synthetic material. PU protects against both vegetable and animal fats and oils.


NITRILE, NBR is a rubber material that is highly resistant to cuts.

LATEX/NATURAL RUBBER, NR has a high level of elasticity that it retains even at low temperatures. Good grip.

POLYVINYL CHLORIDE, PVC, (VINYL) Dipping in PVC often results in slightly thicker and denser materials. Suitable for wet and heavy work.





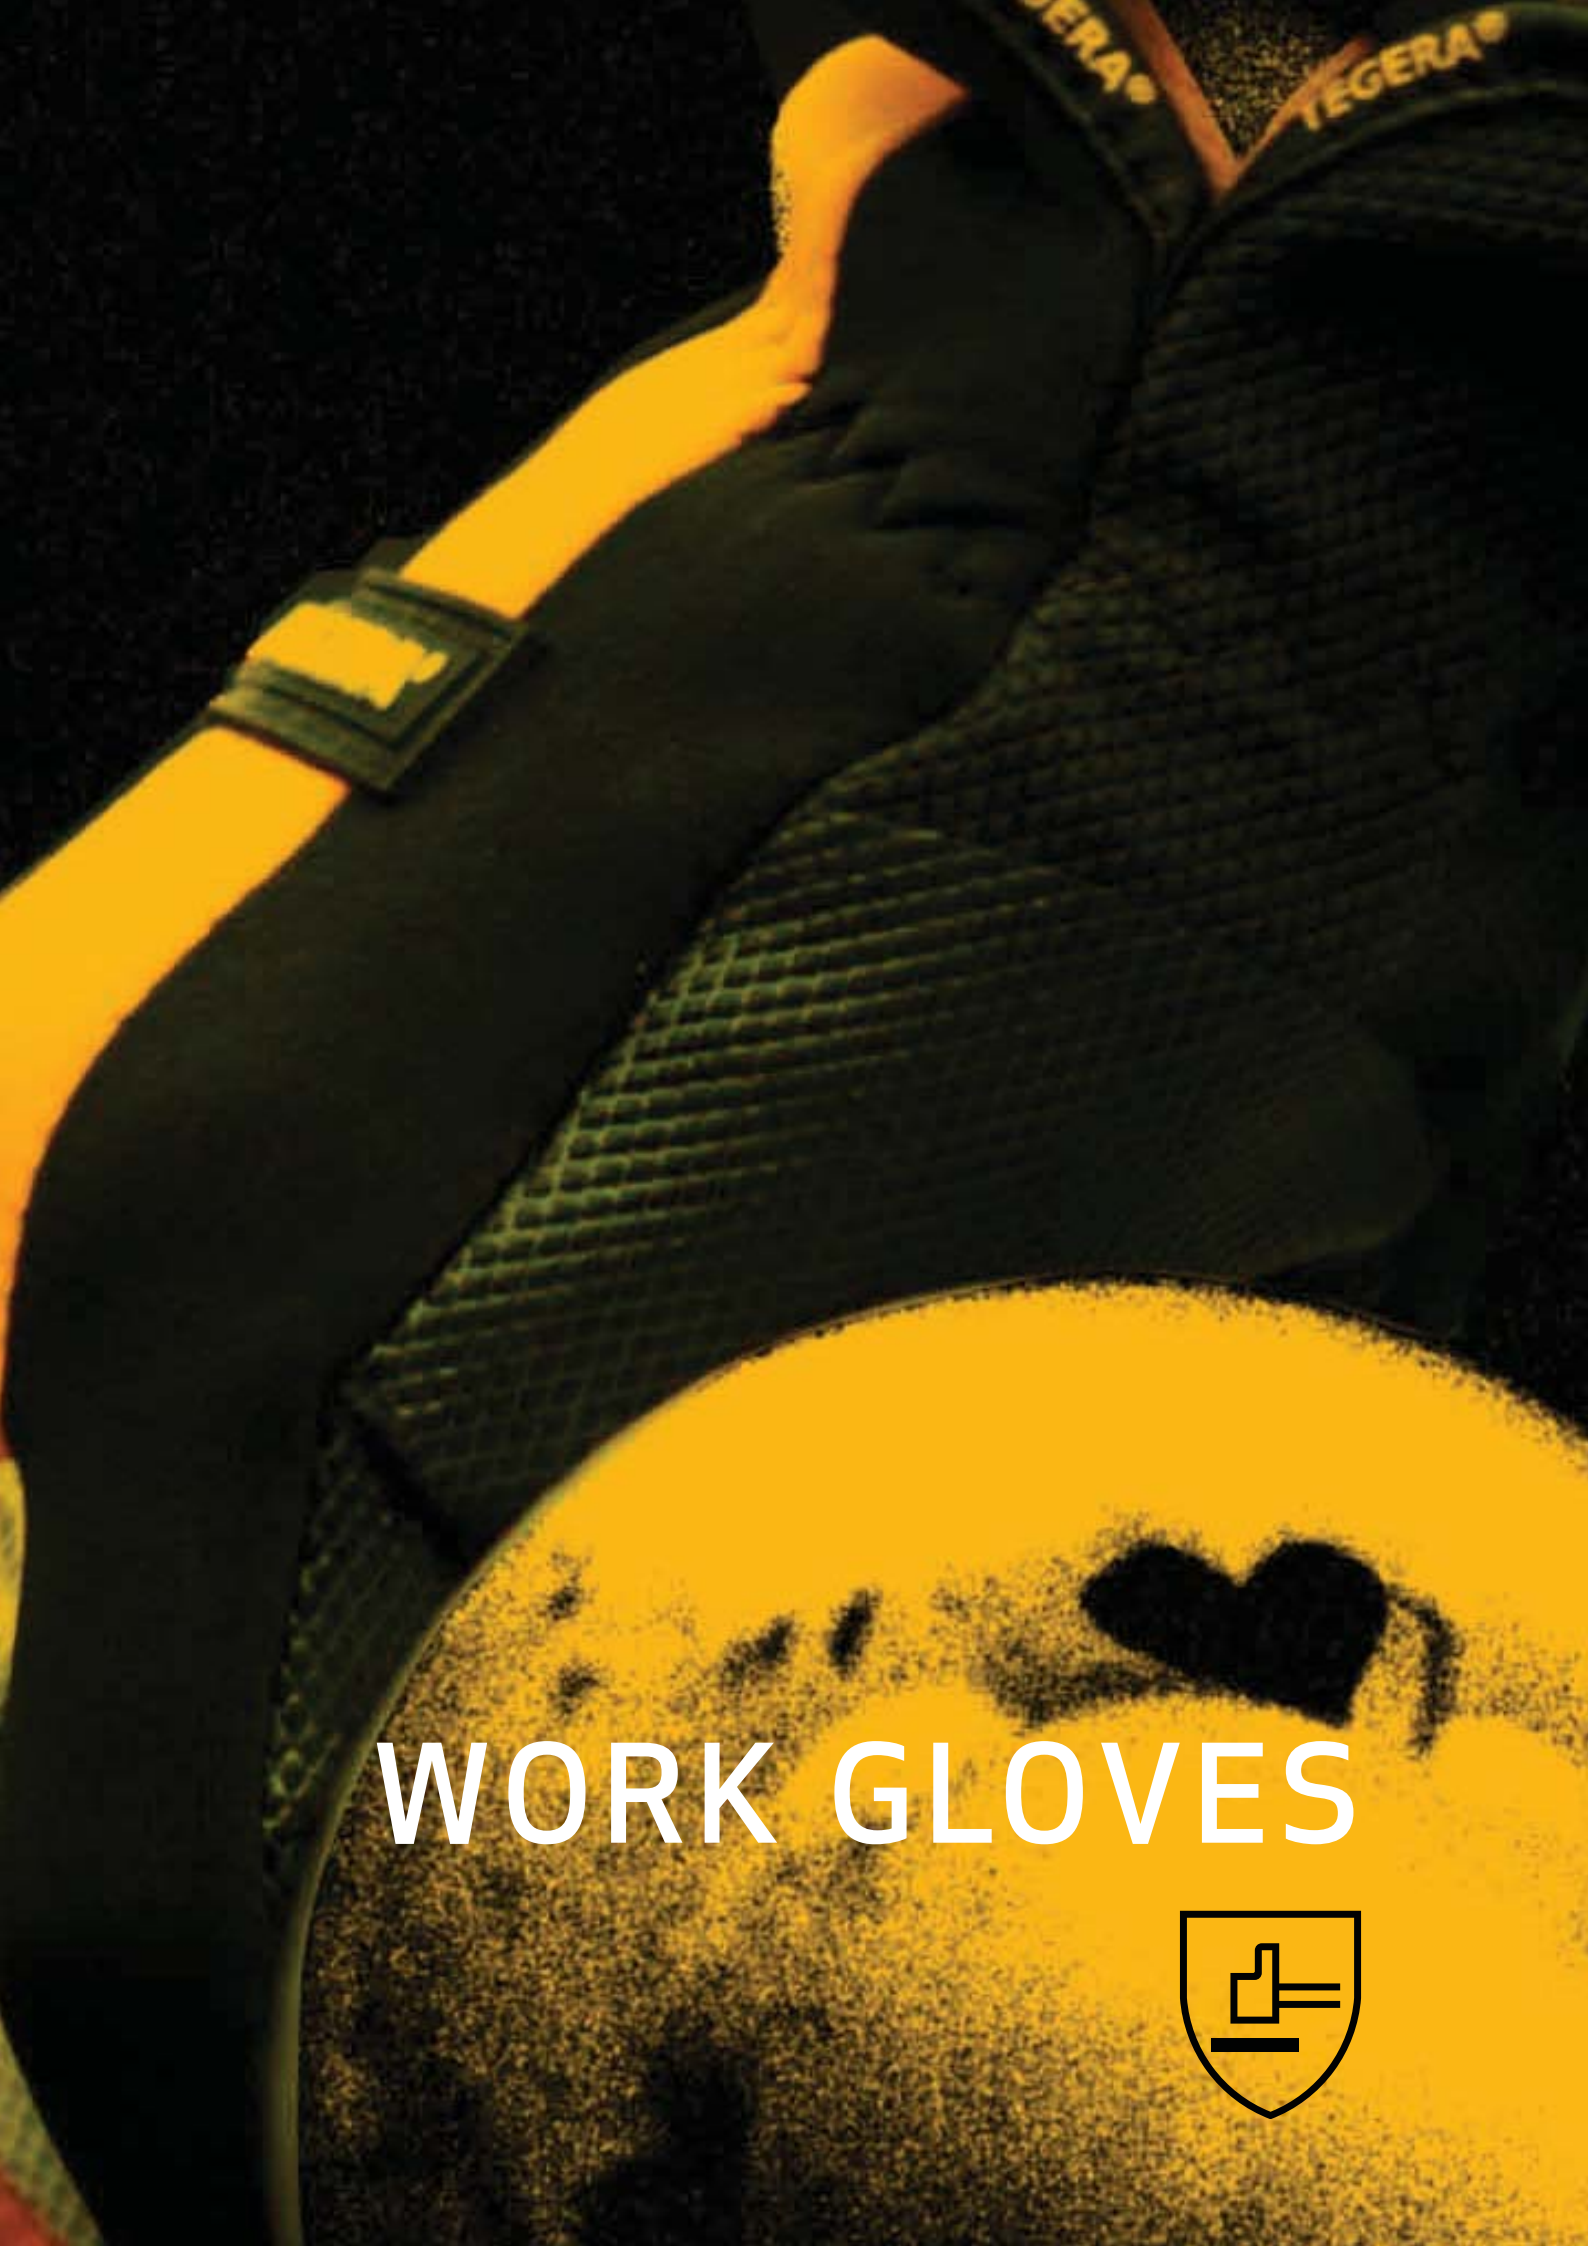

WORK GLOVES



Mechanical risks

This chapter presents gloves that offer protection against mechanical risks – crushing, cuts and vibration damage. Crushing injuries often occur when a glove gets stuck in moving machine parts. Cuts are frequent among workers handling components or tools with sharp edges. Vibration injuries develop over time and may be incurable. Those most at risk are people who use vibrating machines and tools in their work.

Our glove range includes vibration- and impact-dampening models developed with the aid of a totally new technology. We use three different materials in our cut-resistant gloves: KEVLAR® fiber, Dyneema® and CRF®. We combine these exceptionally tough fibres with synthetic materials to also ensure flexibility, a good grip and fingertip sensitivity. We have also developed some leather work gloves made of chrome-free leather. These are specially designed for people with chrome contact allergies, but naturally work well for other users.



AVOID CRUSHING

To avoid crushing injuries you need to keep your hands away from moving parts and use gloves that closely fit your hand. Try out different models and materials. Check that the fingers of the glove are no longer than your own fingers. Also, tighten the Velcro fastener so that the glove doesn't slide forwards over the hand when you work.



AVOID CUTS

Use mechanical equipment such as lifting and moving devices as much as possible. Where manual handling is involved, you need gloves that provide strong protection against blade cuts, e.g., models using Dyneema®.




AVOID VIBRATION INJURIES

Choose your gloves carefully. When working with vibrating machinery and tools, always use anti-vibration gloves that have been approved in accordance with the EN ISO 10819 standard.

Wrist support

Our wrist-supporting gloves are designed for people who need support for the wrists but mobility and fingertip sensitivity in the hands. The wrist support stabilises the wrist and helps you keep your wrists as straight as possible. This is decisive for determining how long you will be able to work without becoming tired or risking long-term injury. The wrist support provides the wrist with the correct angle and counteracts full extension of the hand, which reduces the risk of long-term injury.

- Repeated high stress with an angled wrist is the hand's worst enemy. In the long run, excessively high stress may cause both impaired hand function and long-term medical problems.
- Nerves are sensitive to stress. If they are exposed to impact or strong pressures, they will react with paraesthesia, numbness and pain, which can ultimately lead to impaired function and paralysis.
- The most vulnerable nerve in the hand is where the palm meets the wrist. If it is subjected to repeated heavy shocks it can easily become damaged.

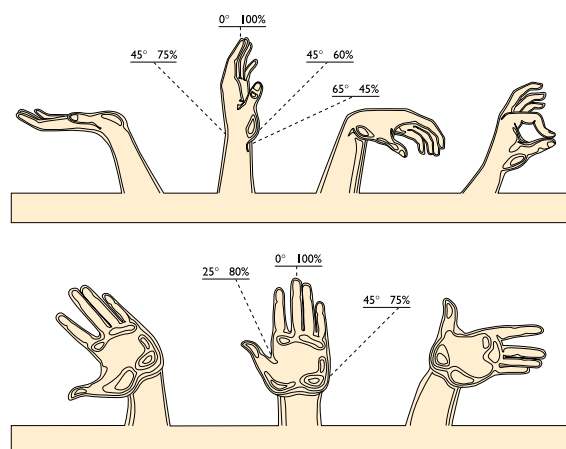

YOU SHOULD AVOID BENDING THE WRIST:

1. Extended upwards/backwards
2. Right out to the little finger
3. Right out to the thumb

A good grip and the correct working position are important for the hand. If the hand is angled inwards or outwards, grip strength is significantly reduced. The image above shows how much grip strength is reduced at various angles, compared to an optimum grip (Rogers 1987).

A man with a beard and safety glasses is working in a workshop. He is wearing a plaid shirt and a white work glove on his left hand, which is holding a circular saw. The saw is cutting through a piece of wood. The background shows various wooden beams and structures, suggesting a construction or carpentry environment. The lighting is warm and focused on the work area.

WORK GLOVES - GENERAL HANDLING

The hand is not just one of the most important tools in almost everything we do each day. It is also one of the most complex and refined feelers we have to the world around us. Unprotected hands are exposed to unnecessary risks. Use protective gloves. Make it a habit. This will protect your hands and reduce your risk of injury. On the following pages you will find useful, practical gloves for precision work, allround work and heavier work.

LIGHT WEIGHT

For precision and assembly work, your fingers need freedom of movement.
The gloves must be very supple, flexible and ergonomically sound.

SYNTHETIC LEATHER – FEATURES AND BENEFITS

Our synthetic leather is made from high-tech materials that allow for sophisticated ergonomic designs. Synthetic leather has excellent touch perception. Fit and form remains intact even in contact with water. It is ideal for people with allergic reactions to chromium (not chrome-tanned).

- **Microthan®** delivers excellent touch perception and flexibility.
- **Microthan®+** is thicker with a grooved surface, making it more durable with improved grip properties. Ideal for rougher environments.
- **Macrothan®** breathes, is soft and comes in various thicknesses for a wide range of work applications.
- **Macrothan®+** contains silicone for high durability. Meets high requirements on strength, fit and dexterity.
- **Polythan®** is a highly durable microfibre but still very soft, making it extremely comfortable even over time.
- **PU leather** is cost-effective and suitable for general applications.

More detailed information on synthetic leather can be found in the chapter "Protect your hands" and the pages "Understanding materials".

TEGERA® 9100

Synthetic leather glove, unlined, 0,5 mm Microthan®, nylon, Cat. II, reinforced index finger, chrome free, for fine assembly work

PALM MATERIAL Microthan®
BACK MATERIAL Nylon
LINING Unlined
FASTENING Elasticated 180°
COLOUR Black, grey, yellow
SIZE RANGE 5, 6, 7, 8, 9, 10, 11
LENGTH RANGE 212-238 mm
PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Hook with hangtag

FEATURES Chrome free, reinforced index finger, reinforced seams, pre-curved fingers, specially designed thumb, short model, ergonomically shaped, reflector, specially designed details
PROPERTIES Extremely good fingertip sensitivity, extra flexible, durable, excellent grip, perfect fit, extra comfortable
PRIMARY ENVIRONMENTS OF USE Dark environments, dry environments, dirty environments



Cat. II



EN 388
1121



MicroThan®



TEGERA®

TEGERA® 9105

Synthetic leather glove, unlined, 0,5 mm Microthan®, polyester, Cat. II, reinforced index finger, chrome free, for fine assembly work

PALM MATERIAL Microthan®
BACK MATERIAL Polyester
LINING Unlined
FASTENING Velcro®
COLOUR Black, grey, yellow
SIZE RANGE 5, 6, 7, 8, 9, 10, 11, 12, 13
LENGTH RANGE 216-253 mm
PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Hook with hangtag

FEATURES Chrome free, reinforced index finger, reinforced seams, reinforced fingertips, pre-curved fingers, specially designed thumb, short model, ergonomically shaped, reflector, specially designed details
PROPERTIES Extremely good fingertip sensitivity, extra flexible, durable, excellent grip, perfect fit, extra comfortable
PRIMARY ENVIRONMENTS OF USE Dark environments, slippery environments, dry environments, clean environments, dirty environments



MicroThan®  TEGERA®

TEGERA® 9140

Synthetic leather glove, unlined, 0,5 mm Microthan®, polyester, Cat. II, chrome free, breathable back, for fine assembly work

PALM MATERIAL Microthan®
BACK MATERIAL Polyester
LINING Unlined
FASTENING Velcro®
COLOUR Black, grey, yellow
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 181-219 mm
PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Hook with hangtag

FEATURES Chrome free, breathable back, reinforced index finger, reinforced seams, padded palm, pre-curved fingers, detachable fingers, short model
PROPERTIES Extremely good fingertip sensitivity, extra flexible, durable, excellent grip, extra comfortable, very breathable
PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments, warm environments, moist environments, dirty environments



MicroThan®  TEGERA®

TEGERA® 9220

Synthetic leather glove, unlined, 0,5 mm Macrothan®, polyester, Cat. II, chrome free, breathable, for fine assembly work

PALM MATERIAL Macrothan®
BACK MATERIAL Polyester
LINING Unlined
FASTENING Velcro®
COLOUR Black, grey, yellow
SIZE RANGE 6, 7, 8, 9, 10, 11
LENGTH RANGE 214-250 mm
PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Hook with hangtag

FEATURES Chrome free, reinforced index finger, reinforced seams, reinforced fingertips, padded palm, pre-curved fingers, specially designed thumb, short model, ergonomically shaped, reflector, soft, specially designed details
PROPERTIES Extremely good fingertip sensitivity, extra flexible, perfect fit, extra comfortable, very breathable
PRIMARY ENVIRONMENTS OF USE Dry environments, dirty environments



MacroThan®  TEGERA®

TEGERA® 5114

Synthetic leather glove, unlined, 0,5 mm synthetic leather, polyester, Cat. II, chrome free, breathable back, for fine assembly work

PALM MATERIAL Synthetic leather
BACK MATERIAL Polyester
LINING Unlined
FASTENING Elasticated 360°
COLOUR Grey, black, blue
SIZE RANGE 6, 7, 8, 9, 10, 11
LENGTH RANGE 210-235 mm
PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Thread
FEATURES Chrome free, breathable back, reinforced index finger, reinforced seams, elastic
PROPERTIES Extremely good fingertip sensitivity, extra flexible, good grip, good fit, comfortable
PRIMARY ENVIRONMENTS OF USE Dry environments, moist environments, oil and greasy environments, dirty environments



TEGERA®

TEGERA® 325

Synthetic leather glove, unlined, 0,6 mm synthetic leather, polyester, Cat. II, chrome free, breathable back, for fine assembly work

PALM MATERIAL Synthetic leather
BACK MATERIAL Polyester
LINING Unlined
FASTENING Elasticated 360°
COLOUR Black, grey, blue
SIZE RANGE 5, 6, 7, 8, 9, 10, 11, 12, 13
LENGTH RANGE 210-245 mm
PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Thread
FEATURES Chrome free, breathable back, reinforced palm, reinforced seams
PROPERTIES Extremely good fingertip sensitivity, extra flexible, perfect fit, extra comfortable, very breathable
PRIMARY ENVIRONMENTS OF USE Dry environments, dirty environments



TEGERA®

TEGERA® 320

Synthetic leather glove, unlined, 0,6 mm synthetic leather, nylon, Cat. II, knuckle protection, chrome free, for fine assembly work

PALM MATERIAL Synthetic leather
BACK MATERIAL Nylon
LINING Unlined
FASTENING Velcro®
COLOUR Blue, black
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 223-248 mm

PAIRS PER PACKAGE/CARTON 12/120
DISPLAY Hook with hangtag
FEATURES Chrome free, reinforced fingertips, knuckle protection, short model
PROPERTIES Good fingertip sensitivity, flexible, good fit, extra comfortable
PRIMARY ENVIRONMENTS OF USE Dry environments, dirty environments



TEGERA®

TEGERA® 515

Synthetic leather glove, unlined, 0,6 mm synthetic leather, polyester, Cat. II, reinforced index finger, chrome free, for fine assembly work

PALM MATERIAL Synthetic leather
BACK MATERIAL Polyester
LINING Unlined
FASTENING Elasticated 180°
COLOUR Black, green
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 220-240 mm
PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Hook with hangtag
FEATURES Chrome free, breathable back, reinforced index finger, reinforced fingertips, short model
PROPERTIES Good fingertip sensitivity, flexible, good grip, good fit, comfortable, breathable
PRIMARY ENVIRONMENTS OF USE Dry environments, dirty environments



TEGERA®

TEGERA® 321

Synthetic leather glove, unlined, 0,6 mm synthetic leather, polyester, Cat. II, reinforced index finger, chrome free, for fine assembly work

PALM MATERIAL Synthetic leather
BACK MATERIAL Polyester
LINING Unlined
FASTENING Elasticated 180°
COLOUR Black, grey
SIZE RANGE 6, 7, 8, 9, 10, 11
LENGTH RANGE 220-260 mm

PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Hook with hangtag
FEATURES Chrome free, reinforced index finger, short model
PROPERTIES Good fingertip sensitivity, flexible, comfortable
PRIMARY ENVIRONMENTS OF USE Dry environments



TEGERA®

LEATHER – FEATURES AND BENEFITS

Leather is strong, supple and adapts to changes in weather. All of our leather comes from carefully selected and tanned hides to ensure a high level of durability and flexibility. Chrome-free leather gloves are also available. Before processing, the hide is split into an outer (full-grain) and inner (split) layer.

- **Full-grain leather** is soft and flexible with a high level of dexterity and comfort.
- **Split leather** has a coarser surface for better grip, heat-insulating properties and flexibility regardless of its thickness.
- **Cowhide or oxhide** is extremely durable.
- **Goatskin** is thin and supple. It provides a high level of touch perception - the glove conforms to the movements of the hand.
- **Pigskin** is soft and breathes well.

More detailed information on leather can be found in the chapter "Protect your hands" and the pages "Understanding materials".

WORK GLOVES - GENERAL HANDLING / LIGHT WEIGHT

TEGERA® 114

Leather glove, unlined, 0,6-0,7 mm full grain goatskin of top quality, nylon, Cat. II, for fine assembly work

PALM MATERIAL Full grain goatskin of top quality

BACK MATERIAL Nylon

LINING Unlined

FASTENING Elasticated 180°

COLOUR Grey, white

SIZE RANGE 5, 6, 7, 8, 9, 10, 11

LENGTH RANGE 210-260 mm

PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Thread

PROPERTIES High level of protection, extremely good fingertip sensitivity, durable, perfect fit

PRIMARY ENVIRONMENTS OF USE Dry environments, dirty environments



Cat. II



EN 388
2001



TEGERA®

TEGERA® 115

Leather glove, unlined, 0,6-0,7 mm full grain goatskin of top quality, nylon, Cat. II, for fine assembly work

PALM MATERIAL Full grain goatskin of top quality

BACK MATERIAL Nylon

LINING Unlined

FASTENING Elasticated 180°

COLOUR Grey, white

SIZE RANGE 6, 7, 8, 9, 10, 11

LENGTH RANGE 230-260 mm

PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Thread

FEATURES Reinforced index finger, reinforced fingertips

PROPERTIES High level of protection, extremely good fingertip sensitivity, perfect fit



Cat. II



EN 388
2001



TEGERA®

TEGERA® 340

Leather glove, unlined, 0,6-0,7 mm full grain goatskin, nylon, Cat. II, chrome free, for precision work

PALM MATERIAL Full grain goatskin
BACK MATERIAL Nylon
LINING Unlined
FASTENING Elasticated 180°
COLOUR Grey, white
SIZE RANGE 7, 8, 9, 10, 11

LENGTH RANGE 230-260 mm
PAIRS PER PACKAGE/CARTON 12/120
DISPLAY Thread
FEATURES Chrome free
PROPERTIES High level of protection, good fingertip sensitivity, durable, perfect fit



Cat. II



EN 388
4121



TEGERA®

TEGERA® 116

Leather glove, unlined, 0,6-0,7 mm full grain goatskin, nylon, Cat. II, reinforced index finger, reinforced fingertips, for fine assembly work

PALM MATERIAL Full grain goatskin
BACK MATERIAL Nylon
LINING Unlined
FASTENING Velcro®
COLOUR Grey, white
SIZE RANGE 6, 7, 8, 9, 10, 11

LENGTH RANGE 220-260 mm
PAIRS PER PACKAGE/CARTON 12/120
DISPLAY Thread
FEATURES Reinforced index finger, reinforced fingertips
PROPERTIES High level of protection, extremely good fingertip sensitivity, durable, perfect fit



Cat. II



EN 388
2001



TEGERA®

TEGERA® 901

Leather glove, unlined, 0,6-0,7 mm full grain goatskin, neoprene, Cat. II, for precision work

PALM MATERIAL Full grain goatskin
BACK MATERIAL Neoprene
LINING Unlined
FASTENING Velcro®
COLOUR Black
SIZE RANGE 7, 8, 9, 10, 11, 12, 13
LENGTH RANGE 250 mm

PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Thread
FEATURES For touch screen, reinforced palm, padded palm
PROPERTIES High level of protection, extremely good fingertip sensitivity, durable, perfect fit, good shock absorption



Cat. II



EN 388
4121



TEGERA®

TEGERA® 124

Leather glove, unlined, 0,6-0,7 mm full grain goatskin, nylon, Cat. II, for fine assembly work

PALM MATERIAL Full grain goatskin
BACK MATERIAL Nylon
LINING Unlined
FASTENING Elasticated 180°
COLOUR Blue, white
SIZE RANGE 6, 7, 8, 9, 10, 11, 12

LENGTH RANGE 220-270 mm
PAIRS PER PACKAGE/CARTON 12/120
DISPLAY Thread
PROPERTIES High level of protection, good fingertip sensitivity, durable, good fit
PRIMARY ENVIRONMENTS OF USE Dry environments, dirty environments



TEGERA®

TEGERA® 12

Leather glove, 0,6-0,7 mm full grain goatskin, cotton, Cat. II, reinforced fingertips, for assembly work

PALM MATERIAL Full grain goatskin
BACK MATERIAL Cotton
FASTENING Elasticated 180°
COLOUR Blue, black, white
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 225-270 mm
PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Thread
FEATURES Reinforced fingertips
PROPERTIES Good fingertip sensitivity, flexible, durable, good fit
PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments, dirty environments



TEGERA®

TEGERA® 13

Leather glove, unlined, 0,7-0,8 mm full grain goatskin, cotton, Cat. II, reinforced index finger, reinforced fingers and thumb, for assembly work

PALM MATERIAL Full grain goatskin
BACK MATERIAL Cotton
LINING Unlined
FASTENING Velcro®
COLOUR Blue, black, white
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 235-270 mm

PAIRS PER PACKAGE/CARTON 12/120
DISPLAY Hook with hangtag
FEATURES Reinforced index finger, reinforced fingertips, reinforced thumb
PROPERTIES High level of protection, good fingertip sensitivity, flexible, durable, good grip, good fit, comfortable



TEGERA®

TEGERA® 14

Leather glove, 0,6-0,7 mm full grain goatskin, cotton, Cat. II, reinforced index finger, reinforced fingers and thumb, for assembly work

PALM MATERIAL Full grain goatskin

BACK MATERIAL Cotton

COLOUR Blue, black, white

SIZE RANGE 7, 8, 9, 10, 11

LENGTH RANGE 265-295 mm

PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Thread

FEATURES Reinforced index finger, reinforced fingers and thumb

PROPERTIES High level of protection, good fingertip sensitivity, flexible, durable, good grip, good fit, comfortable

PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments



Cat. II



EN 388
2001



 **TEGERA®**

TEGERA® 113

Leather glove, unlined, 0,6-0,7 mm full grain pigskin, cotton, Cat. II, reinforced index finger, reinforced fingertips, for fine assembly work

PALM MATERIAL Full grain pigskin

BACK MATERIAL Cotton

LINING Unlined

FASTENING Velcro®

COLOUR Blue, black, grey, white

SIZE RANGE 7, 8, 9, 10, 11

LENGTH RANGE 235-275 mm

PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Hook with hangtag

FEATURES Reinforced index finger, reinforced fingertips

PROPERTIES High level of protection, extremely good fingertip sensitivity, durable, good grip, perfect fit



Cat. II



EN 388
3111



 **TEGERA®**

KNITTED AND DIPPED GLOVES – FEATURES AND BENEFITS

We work with specially developed hand moulds to ensure consistency in fit, quality and ergonomic features. We also control the mixture of materials to suit different work applications and maximise features such as dexterity, grip, durability and comfort.

LINER MATERIALS

- **Polyester** is strong and flexible with low moisture absorption.
- **Acrylic** is soft with good thermal insulation properties and a resemblance to wool.
- **Nylon** is very strong and flexible with low moisture absorption.
- **Cotton** is very comfortable, has high moisture absorption and is ideal for lighter jobs.

DIPPING MATERIALS

- **Polyurethane (PU)** provides excellent grip in both wet and dry environments. It protects against vegetable and animal fats but is less effective against moisture penetration.
- **Nitrile (NBR)** is highly resistant to cuts, provides acceptable grip and is effective against moisture penetration.
- **Nitrile foam** is flexible and provides good grip. It is also effective against moisture penetration.
- **Latex/natural rubber (NR)** is highly elastic and provides good grip but is sensitive to UV light.
- **Polyvinyl chloride (PVC/VINYL)** is suitable for heavy and wet work.

More detailed information on knitted and dipped gloves can be found in the chapter "Protect your hands" and the pages "Understanding materials".

WORK GLOVES - GENERAL HANDLING / LIGHT WEIGHT

TEGERA® 737

Synthetic glove, nitrile, double-dipped, nylon, 15 gg, sandy finish, Cat. II, water and oil repellent, for fine assembly work

LINER MATERIAL Nylon, 15 gg

DIPPING Double-dipped

DIPPING MATERIAL Nitrile

GRIP PATTERN Sandy finish

COLOUR Black, blue

SIZE RANGE 7, 8, 9, 10, 11

LENGTH RANGE 220 - 260 mm

PAIRS PER PACKAGE/CARTON 12-120

DISPLAY Bag with euro slot

FEATURES Water and oil repellent, anatomically designed, soft, specially designed details

PROPERTIES High level of protection, good fingertip sensitivity, flexible, very durable, excellent grip, good fit, comfortable, light

PRIMARY ENVIRONMENTS OF USE Slippery environments, oil and greasy environments, dirty environments



Cat. II



EN 388
4131



TEGERA®

TEGERA® 728

Synthetic glove, nitrile, palm-dipped, Lycra®, nylon, 15 gg, sandy finish, Cat. II, oil and grease resistant palm, for assembly work

LINER MATERIAL Lycra®, nylon, 15 gg

DIPPING Palm-dipped

DIPPING MATERIAL Nitrile

GRIP PATTERN Sandy finish

COLOUR Black, grey

SIZE RANGE 7, 8, 9, 10, 11

LENGTH RANGE 230 - 270mm

PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag with euro slot

FEATURES Oil and grease resistant palm

PROPERTIES Good fingertip sensitivity, durable, good grip, good fit, comfortable, breathable

PRIMARY ENVIRONMENTS OF USE Moist environments, oil and greasy environments



Cat. II



EN 388
4121



TEGERA®

TEGERA® 881

Synthetic glove, nitrile, nitrile foam, 3/4 dipped, Lycra®, nylon, reinforced grip pattern, Cat. II, water and oil repellent palm, for precision work

LINER MATERIAL Lycra®, nylon
DIPPING 3/4 dipped
DIPPING MATERIAL Nitrile, nitrile foam
GRIP PATTERN Reinforced grip pattern
COLOUR Black, blue
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 230-280 mm
PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag with euro slot
FEATURES Water and oil repellent palm and knuckle
PROPERTIES Good fingertip sensitivity, durable, good fit, comfortable, light
PRIMARY ENVIRONMENTS OF USE Slippery environments, wet environments, moist environments, oil and greasy environments, dirty environments



TEGERA®

TEGERA® 887

Synthetic glove, nitrile foam, palm-dipped, Lycra®, nylon, 15 gg, reinforced grip pattern, Cat. II, water and oil repellent palm, for precision work

LINER MATERIAL Lycra®, nylon, 15 gg
DIPPING Palm-dipped
DIPPING MATERIAL Nitrile foam
GRIP PATTERN Reinforced grip pattern
COLOUR Black, blue
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 220 - 260mm
PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag with euro slot
FEATURES Breathable back, water and oil repellent palm
PROPERTIES Good fingertip sensitivity, durable, good grip, comfortable, breathable, light
PRIMARY ENVIRONMENTS OF USE Slippery environments, oil and greasy environments, dirty environments



TEGERA®

TEGERA® 883

Synthetic glove, nitrile foam, palm-dipped, Lycra®, nylon, 15 gg, foam grip pattern, Cat. II, water and oil repellent palm, for precision work

LINER MATERIAL Lycra®, nylon, 15 gg
DIPPING Palm-dipped
DIPPING MATERIAL Nitrile foam
GRIP PATTERN Foam grip pattern
COLOUR Black, grey
SIZE RANGE 6, 7, 8, 9, 10, 11
LENGTH RANGE 220 - 260mm
PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Hook with hangtag
FEATURES Anatomically designed
PROPERTIES Highest level of protection, extremely good fingertip sensitivity, extra flexible, very durable, excellent grip, perfect fit, extra comfortable, very breathable, light
PRIMARY ENVIRONMENTS OF USE Slippery environments, oil and greasy environments, dirty environments, harsh environments



TEGERA®

TEGERA® 884

Synthetic glove, nitrile-dots, nitrile foam, palm-dipped, Lycra®, nylon, 15 gg, dots, Cat. II, water and oil repellent palm, anatomically designed, for precision work

LINER MATERIAL Lycra®, nylon, 15 gg

DIPPING Palm-dipped

DIPPING MATERIAL Nitrile foam

MATERIAL Nitrile-dots

GRIP PATTERN Dots

COLOUR Black, grey

SIZE RANGE 7, 8, 9, 10, 11, 12

LENGTH RANGE 220 - 260mm

PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Hook with hangtag

FEATURES Water and oil repellent palm

PROPERTIES High level of protection, good fingertip sensitivity, extra flexible, very durable, perfect fit, comfortable, very breathable, light

PRIMARY ENVIRONMENTS OF USE Slippery environments, wet environments, moist environments, oil and greasy environments, dirty environments



TEGERA®



TEGERA® 873

Synthetic glove, nitrile foam, palm-dipped, Lycra®, nylon, 15 gg, foam grip pattern, Cat. II, oil and grease resistant palm, for precision work

LINER MATERIAL Lycra®, nylon, 15 gg

DIPPING Palm-dipped

DIPPING MATERIAL Nitrile foam

GRIP PATTERN Foam grip pattern

COLOUR Black, grey

SIZE RANGE 7, 8, 9, 10, 11

LENGTH RANGE 220 - 260mm

PAIRS PER PACKAGE/CARTON 12/120

FEATURES Oil and grease resistant palm

PROPERTIES Good fingertip sensitivity, durable, good fit, comfortable, breathable, light

PRIMARY ENVIRONMENTS OF USE Oil and greasy environments, dirty environments



TEGERA®



TEGERA® 874

Synthetic glove, nitrile foam, 3/4 dipped, Lycra®, nylon, foam grip pattern, Cat. II, oil and grease resistant palm, for precision work

LINER MATERIAL Lycra®, nylon

DIPPING 3/4 dipped

DIPPING MATERIAL Nitrile foam

GRIP PATTERN Foam grip pattern

COLOUR Black, grey

SIZE RANGE 7, 8, 9, 10, 11

LENGTH RANGE 220 - 260mm

PAIRS PER PACKAGE/CARTON 12/120

FEATURES Water and oil repellent palm and knuckle

PROPERTIES Good fingertip sensitivity, durable, good fit, comfortable, light

PRIMARY ENVIRONMENTS OF USE Oil and greasy environments, dirty environments



TEGERA®



TEGERA® 875

Synthetic glove, nitrile foam, palm-dipped, Lycra®, nylon, 15 gg, foam grip pattern, Cat. II, water and oil repellent palm, for precision work

LINER MATERIAL Lycra®, nylon, 15 gg
DIPPING Palm-dipped
DIPPING MATERIAL Nitrile foam
GRIP PATTERN Foam grip pattern
COLOUR White
SIZE RANGE 6, 7, 8, 9, 10, 11
LENGTH RANGE 220 - 260mm

PAIRS PER PACKAGE/CARTON 12/120
FEATURES Breathable back, water and oil repellent palm
PROPERTIES Good fingertip sensitivity, durable, good fit, comfortable, breathable, light
PRIMARY ENVIRONMENTS OF USE Oil and greasy environments, dirty environments



TEGERA®

TEGERA® 886

Synthetic glove, nitrile foam, 3/4 dipped, Lycra®, nylon, 18 gg, smooth finish, Cat. II, water and oil repellent palm, for fine assembly work

LINER MATERIAL Lycra®, nylon, 18 gg
DIPPING 3/4 dipped
DIPPING MATERIAL Nitrile foam
GRIP PATTERN Smooth finish
COLOUR Black, yellow
SIZE RANGE 6, 7, 8, 9, 10, 11
LENGTH RANGE 230 - 280mm
PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag with euro slot
FEATURES Water and oil repellent palm and knuckle
PROPERTIES Good fingertip sensitivity, flexible, durable, good grip, good fit, comfortable, light
PRIMARY ENVIRONMENTS OF USE Moist environments, oil and greasy environments, dirty environments



TEGERA®

TEGERA® 882

Synthetic glove, nitrile foam, fully dipped, nylon, 15 gg, micro foam grip pattern, Cat. II, water and oil repellent, for fine assembly work

LINER MATERIAL Nylon, 15 gg
DIPPING Fully dipped
DIPPING MATERIAL Nitrile foam
GRIP PATTERN Micro foam grip pattern
COLOUR Black
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 230 - 260mm

PAIRS PER PACKAGE/CARTON 12/120
DISPLAY Bag with euro slot
FEATURES Water and oil repellent
PROPERTIES Good fingertip sensitivity, flexible, durable, good grip, good fit
PRIMARY ENVIRONMENTS OF USE Oil and greasy environments, dirty environments



TEGERA®

TEGERA® 894

Synthetic glove, PU, palm-dipped, nylon, 18 gg, smooth finish, Cat. II, water and oil repellent palm, for precision work

LINER MATERIAL Nylon, 18 gg
DIPPING Palm-dipped
DIPPING MATERIAL PU
GRIP PATTERN Smooth finish
COLOUR Grey
SIZE RANGE 6, 7, 8, 9, 10
LENGTH RANGE 220 - 250mm
PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag
FEATURES Water and oil repellent palm
PROPERTIES Extremely good fingertip sensitivity, extra flexible, durable, good grip, perfect fit, extra comfortable, breathable, extremely Light
PRIMARY ENVIRONMENTS OF USE Oil and greasy environments, dirty environments



TEGERA®

TEGERA® 896

Synthetic glove, PU, palm-dipped, nylon, 18 gg, smooth finish, Cat. II, breathable back, water and oil repellent palm, for precision work

LINER MATERIAL Nylon, 18 gg
DIPPING Palm-dipped
DIPPING MATERIAL PU
GRIP PATTERN Smooth finish
COLOUR White
SIZE RANGE 5, 6, 7, 8, 9, 10
LENGTH RANGE 220 - 260mm
PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag with euro slot
FEATURES Water and oil repellent palm
PROPERTIES Highest level of protection, extremely good fingertip sensitivity, extra flexible, durable, good grip, perfect fit, extra comfortable, breathable, light
PRIMARY ENVIRONMENTS OF USE Oil and greasy environments, dirty environments



TEGERA®

TEGERA® 890

Synthetic glove, unlined, PU, palm-dipped, nylon, 15 gg, smooth finish, Cat. II

LINER MATERIAL Nylon, 15 gg
DIPPING Palm-dipped
DIPPING MATERIAL PU
LINING Unlined
GRIP PATTERN Smooth finish
COLOUR Grey
SIZE RANGE 6, 7, 8, 9, 10, 11
LENGTH RANGE 220 - 250 mm

PAIRS PER PACKAGE/CARTON 12/240
FEATURES Breathable back
PROPERTIES Extremely good fingertip sensitivity, extra flexible, durable, perfect fit, comfortable, breathable
PRIMARY ENVIRONMENTS OF USE Dry environments, moist environments, dirty environments



TEGERA®

TEGERA® 891

Synthetic glove, PU, 3/4 dipped, nylon, 15 gg, smooth finish, Cat. II, water and oil repellent palm, for fine assembly work

BACK MATERIAL Nylon
LINER MATERIAL Nylon, 15 gg
DIPPING 3/4 dipped
DIPPING MATERIAL PU
GRIP PATTERN Smooth finish
COLOUR Grey, white
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 220-250 mm

PAIRS PER PACKAGE/CARTON 12/240
FEATURES Water and oil repellent palm and knuckle
PROPERTIES Good fingertip sensitivity, flexible, good fit, light
PRIMARY ENVIRONMENTS OF USE Moist environments, oil and greasy environments, dirty environments



TEGERA®

TEGERA® 850

Synthetic glove, PU, palm-dipped, nylon, 13 gg, Cat. II, breathable back, oil and grease resistant palm, for precision work

LINER MATERIAL Nylon, 13 gg
DIPPING Palm-dipped
DIPPING MATERIAL PU
COLOUR White
SIZE RANGE 6, 7, 8, 9, 10
LENGTH RANGE 220 - 270 mm
PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag with euro slot
FEATURES Breathable back, oil and grease resistant palm
PROPERTIES Good fingertip sensitivity, good grip, good fit, breathable, light
PRIMARY ENVIRONMENTS OF USE Dirty environments



TEGERA®

TEGERA® 855

Synthetic glove, PU, palm-dipped, nylon, 13 gg, Cat. II, oil and grease resistant palm, for precision work

LINER MATERIAL Nylon, 13 gg
DIPPING Palm-dipped
DIPPING MATERIAL PU
COLOUR Grey
SIZE RANGE 6, 7, 8, 9, 10, 11
LENGTH RANGE 220 - 270 mm

PAIRS PER PACKAGE/CARTON 12/120
DISPLAY Bag with euro slot
FEATURES Oil and grease resistant palm
PROPERTIES Good fingertip sensitivity, flexible, good fit, comfortable, breathable, light
PRIMARY ENVIRONMENTS OF USE Oil and greasy environments



TEGERA®

TEGERA® 860

Synthetic glove, 0,7-0,8 mm PU, palm-dipped, nylon, 13 gg, smooth finish, Cat. II, oil and grease resistant palm, for precision work

LINER MATERIAL Nylon, 13 gg
DIPPING Palm-dipped
DIPPING MATERIAL PU
GRIP PATTERN Smooth finish
COLOUR Black
SIZE RANGE 6, 7, 8, 9, 10, 11
LENGTH RANGE 220 - 270 mm
PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Hook with hangtag
FEATURES Breathable back, oil and grease resistant palm
PROPERTIES Extremely good fingertip sensitivity, flexible, durable, good grip, good fit, comfortable, breathable
PRIMARY ENVIRONMENTS OF USE Dirty environments



TEGERA®

TEGERA® 861

Synthetic glove, PU, 3/4 dipped, nylon, 13 gg, smooth finish, Cat. II, water and oil repellent palm, for fine assembly work

LINER MATERIAL Nylon, 13 gg
DIPPING 3/4 dipped
DIPPING MATERIAL PU
GRIP PATTERN Smooth finish
COLOUR Black
SIZE RANGE 6, 7, 8, 9, 10, 11
LENGTH RANGE 220 - 270mm
PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag with euro slot
FEATURES Water and oil repellent palm and knuckle
PROPERTIES Good fingertip sensitivity, flexible, durable, good grip, good fit, comfortable, breathable, light
PRIMARY ENVIRONMENTS OF USE Oil and greasy environments, dirty environments



TEGERA®

TEGERA® 866

Synthetic glove, PU, palm-dipped, polyester, 13 gg, smooth finish, Cat. II, breathable back, oil and grease resistant palm, for precision work

LINER MATERIAL Polyester, 13 gg
DIPPING Palm-dipped
DIPPING MATERIAL PU
GRIP PATTERN Smooth finish
COLOUR Black
SIZE RANGE 6, 7, 8, 9, 10, 11

LENGTH RANGE 220 - 260mm
PAIRS PER PACKAGE/CARTON 6/120
DISPLAY Bag
FEATURES Oil and grease resistant palm
PROPERTIES Flexible, durable, breathable, light
PRIMARY ENVIRONMENTS OF USE Oil and greasy environments, dirty environments



TEGERA®

TEGERA® 867

Synthetic glove, PU, palm-dipped, polyester, 13 gg, smooth finish, Cat. II, water and oil repellent palm, for fine assembly work

LINER MATERIAL Polyester, 13 gg
DIPPING Palm-dipped
DIPPING MATERIAL PU
GRIP PATTERN Smooth finish
COLOUR White
SIZE RANGE 6, 7, 8, 9, 10, 11

LENGTH RANGE 220 - 260mm
PAIRS PER PACKAGE/CARTON 6/120
DISPLAY Bag
FEATURES Water and oil repellent palm
PROPERTIES Flexible, breathable, light
PRIMARY ENVIRONMENTS OF USE Oil and greasy environments, dirty environments



TEGERA®

TEGERA® 868

Synthetic glove, PU, palm-dipped, polyester, 13 gg, smooth finish, Cat. II, water and oil repellent palm, for fine assembly work

LINER MATERIAL Polyester, 13 gg
DIPPING Palm-dipped
DIPPING MATERIAL PU
GRIP PATTERN Smooth finish
COLOUR Grey
SIZE RANGE 5, 6, 7, 8, 9, 10, 11
LENGTH RANGE 220 - 260mm

PAIRS PER PACKAGE/CARTON 6/120
DISPLAY Bag
FEATURES Water and oil repellent palm
PROPERTIES Flexible, comfortable, breathable, light
PRIMARY ENVIRONMENTS OF USE Oil and greasy environments, dirty environments



TEGERA®

TEGERA® 880

Synthetic glove, PVC (Vinyl), palm-dipped, nylon, 13 gg, sandy finish, Cat. II, oil and grease resistant palm, for fine assembly work

LINER MATERIAL Nylon, 13 gg
DIPPING Palm-dipped
DIPPING MATERIAL PVC (Vinyl)
GRIP PATTERN Sandy finish
COLOUR Black, grey
SIZE RANGE 6, 7, 8, 9, 10, 11
LENGTH RANGE 230 - 260mm
PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag with euro slot
FEATURES Breathable back, oil and grease resistant palm
PROPERTIES Flexible, durable, good grip, good fit, comfortable, breathable
PRIMARY ENVIRONMENTS OF USE Wet environments, moist environments, oil and greasy environments, dirty environments



TEGERA®

TEXTILE GLOVES – FEATURES AND BENEFITS

We control the mixture of materials to suit different work applications and maximise features such as dexterity, grip, durability and comfort.

LINER MATERIALS

Please remember that synthetic liner materials are not to be used in contact with flames or high temperatures. Natural cotton, on the other hand, is flammable but the way it burns prevents it from adhering to the skin. **Knitting gauge (gg)** refers to the number of stitches per inch in a garment. A lower number translates into a thicker glove suitable for rougher uses. A higher number means a thinner glove for precision work.

- **Polyester** is strong and flexible with low moisture absorption.
- **Acrylic** is soft with good thermal insulation properties and a resemblance to wool.
- **Nylon** is very strong and flexible with low moisture absorption.
- **Viscose** is a refined cellulose fibre that is soft and comfortable with high moisture absorption (similar to cotton).
- **Cotton** is very comfortable, has high moisture absorption and is ideal for lighter jobs.

More detailed information on textile gloves can be found in the chapter "Protect your hands" and the pages "Understanding materials".

WORK GLOVES - GENERAL HANDLING / LIGHT WEIGHT

TEGERA® 311

Textile glove, double-stitched fingers and thumb, nylon, 13 gg, Cat. II, reinforced fingers and thumb, soft, for assembly work

LINER MATERIAL Double-stitched fingers and thumb, nylon, 13 gg

COLOUR White

SIZE RANGE 6, 7, 8, 9, 10

LENGTH RANGE 195-240 mm

PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag

FEATURES Reinforced fingers and thumb, thin

PROPERTIES Extremely good fingertip sensitivity, flexible, durable, comfortable

PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments



Cat. II



EN 388
214X



TEGERA®

TEGERA® 312

Textile glove, nylon, 13 gg, Cat. II, for assembly work

LINER MATERIAL Nylon, 13 gg

COLOUR White

SIZE RANGE 6, 7, 8, 9, 10

LENGTH RANGE 200-220-260

PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag

FEATURES Soft, elastic

PROPERTIES Extremely good fingertip sensitivity, extra flexible, very durable, perfect fit, extra comfortable, breathable, extremely Light

PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments



Cat. II



EN 388
212X



TEGERA®

TEGERA® 925

Textile glove, cotton, PVC (Vinyl)-dots phthalate-free, 15 gg, dots, Cat. II, phthalate-free, for assembly work

LINER MATERIAL Cotton, PVC (Vinyl)-dots phthalate-free, 15 gg

GRIP PATTERN Dots

FASTENING Elasticated 360°

SIZE RANGE 6, 7, 8, 9, 10, 11

LENGTH RANGE 220-270mm

PAIRS PER PACKAGE/CARTON 12/120

FEATURES Breathable back, reinforced palm, soft

PROPERTIES Extremely good fingertip sensitivity, extra flexible, good grip, perfect fit, comfortable

PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments, warm environments



Cat. II



EN 388
012X



TEGERA®

TEGERA® 921

Textile glove, cotton, PVC (Vinyl)-dots phthalate-free, 15 gg, dots, Cat. II, phthalate-free, for assembly work

LINER MATERIAL Cotton, PVC (Vinyl)-dots phthalate-free, 15 gg

GRIP PATTERN Dots

FASTENING Elasticated 360°

COLOUR White

SIZE RANGE 6, 7, 8, 9, 10, 11

LENGTH RANGE 220-270 mm

PAIRS PER PACKAGE/CARTON 12/120

FEATURES Breathable back, reinforced palm, soft

PROPERTIES Extremely good fingertip sensitivity, extra flexible, good grip, perfect fit, comfortable

PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments



Cat. II



EN 388
0121



TEGERA®

TEGERA® 8120

Textile glove, cotton, Cat. I, for assembly work

PALM MATERIAL Cotton

BACK MATERIAL Cotton

FASTENING Elasticated 180°

COLOUR White

SIZE RANGE 6, 7, 8, 9, 10, 11

LENGTH RANGE 220-270

PAIRS PER PACKAGE/CARTON 12/300

FEATURES Specially designed thumb, chain stitch, soft

PROPERTIES Good fingertip sensitivity, flexible, good grip, comfortable, breathable, light

PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments



Cat. I

EN 420

Council Directive
89/686/EEC
(PPE Directive)



TEGERA®

TEGERA® 919

Textile glove, cotton, polyester, 15 gg, Cat. II, soft, for assembly work

LINER MATERIAL Cotton, polyester, 15 gg
FASTENING Elasticated 360°
COLOUR White
SIZE RANGE 6, 7, 8, 9, 10, 11
LENGTH RANGE 240-290

PAIRS PER PACKAGE/CARTON 12/120
FEATURES Soft, elastic, thin
PROPERTIES Good fingertip sensitivity, extra flexible, good fit, comfortable
PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments



TEGERA®

TEGERA® 310

Textile glove, double knitted, cotton, nylon, 13 gg, Cat. II, for assembly work

LINER MATERIAL Double knitted, cotton, nylon, 13 gg
COLOUR White
SIZE RANGE 6, 7, 8, 9, 10, 11
LENGTH RANGE 215-260 mm
PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag
FEATURES Soft
PROPERTIES High level of protection, good fingertip sensitivity, flexible, very durable, perfect fit, extra comfortable, breathable
PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments



TEGERA®

TEGERA® 931

Textile glove, nylon, PVC (Vinyl)-dots phthalate-free, 13 gg, dots, Cat. II, phthalate-free, for assembly work

LINER MATERIAL Nylon, PVC (Vinyl)-dots phthalate-free, 13 gg
GRIP PATTERN Dots
FASTENING Elasticated 360°
COLOUR White
SIZE RANGE 6, 7, 8, 9, 10, 11
LENGTH RANGE 220-270

PAIRS PER PACKAGE/CARTON 12/120
FEATURES Phthalate-free, washable in 40° C
PROPERTIES Extremely good fingertip sensitivity, flexible, durable, good grip, good fit, comfortable, light
PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments



TEGERA®

TEGERA® 8125

Textile glove, cotton, PVC (Vinyl)-dots phthalate-free, Cat. I, for assembly work

PALM MATERIAL Cotton, PVC (Vinyl)-dots phthalate-free
BACK MATERIAL Cotton
FASTENING Elasticated 180°
COLOUR Black
SIZE RANGE 6, 7, 8, 9, 10, 11
LENGTH RANGE 220-270

PAIRS PER PACKAGE/CARTON 12/300
DISPLAY Thread
FEATURES Chain stitch, soft
PROPERTIES Good fingertip sensitivity, flexible, good grip, good fit, breathable, light
PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments



Cat. I

EN 420

Council Directive 89/686/EEC (PPE Directive)



TEGERA®

TEGERA® 8127

Textile glove, cotton, PVC (Vinyl)-dots phthalate-free, Cat. I, for assembly work

PALM MATERIAL Cotton, PVC (Vinyl)-dots phthalate-free
BACK MATERIAL Cotton
FASTENING Elasticated 180°
COLOUR White
SIZE RANGE 6, 7, 8, 9, 10, 11
LENGTH RANGE 220-270 mm

PAIRS PER PACKAGE/CARTON 12/300
FEATURES Chain stitch, soft
PROPERTIES Good fingertip sensitivity, flexible, good grip, good fit, comfortable, breathable, light
PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments



Cat. I

EN 420

Council Directive 89/686/EEC (PPE Directive)



TEGERA®

TEGERA® 8128

Textile glove, cotton, PVC (Vinyl)-dots phthalate-free, spandex, Cat. I, for assembly work

PALM MATERIAL Cotton, PVC (Vinyl)-dots phthalate-free
BACK MATERIAL Spandex
FASTENING Elasticated 180°
COLOUR Grey, white
SIZE RANGE 6, 7, 8, 9, 10, 11

LENGTH RANGE 220-270 mm
PAIRS PER PACKAGE/CARTON 12/300
FEATURES Chain stitch, soft
PROPERTIES Good fingertip sensitivity, flexible, good grip
PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments



Cat. I

EN 420

Council Directive 89/686/EEC (PPE Directive)



TEGERA®

MEDIUM WEIGHT

You need hardwearing gloves in a durable material. At the same time, they must be supple and comfortable to wear.

SYNTHETIC LEATHER – FEATURES AND BENEFITS

Our synthetic leather is made from high-tech materials that allow for sophisticated ergonomic designs. Synthetic leather has excellent touch perception. Fit and form remains intact even in contact with water. It is ideal for people with allergic reactions to chromium (not chrome-tanned).

- **Microthan®** delivers excellent touch perception and flexibility.
- **Microthan®+** is thicker with a grooved surface, making it more durable with improved grip properties. Ideal for rougher environments.
- **Macrothan®** breathes, is soft and comes in various thicknesses for a wide range of work applications.
- **Macrothan®+** contains silicone for high durability. Meets high requirements on strength, fit and dexterity.
- **Polythan®** is a highly durable microfibre but still very soft, making it extremely comfortable even over time.
- **PU leather** is cost-effective and suitable for general applications.

More detailed information on synthetic leather can be found in the chapter "Protect your hands" and the pages "Understanding materials".

TEGERA® 9123

Synthetic leather glove, unlined, 0,7 mm Microthan®+, diamond grip pattern, polyester, Cat. II, reinforced seams, chrome free, for assembly work

PALM MATERIAL Microthan®+
BACK MATERIAL Polyester
LINING Unlined
GRIP PATTERN Diamond grip pattern
FASTENING Elasticated 360°
COLOUR Yellow, black
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 200-235 mm
PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Hook with hangtag

FEATURES For touch screen, chrome free, high-viz colour, reinforced index finger, reinforced seams, reinforced fingertips, pre-curved fingers, specially designed thumb, short model, ergonomically shaped, reflector, specially designed details

PROPERTIES Good fingertip sensitivity, flexible, durable, excellent grip, perfect fit, extra comfortable

PRIMARY ENVIRONMENTS OF USE Dark environments, slippery environments, dry environments, moist environments, oil and greasy environments, dirty environments



TOUCHSCREEN



Cat. II



EN 388
1121



MicroThan®+



TEGERA®

TEGERA® 9124

Synthetic leather glove, unlined, 0,7 mm Microthan®+, diamond grip pattern, polyester, Cat. II, reinforced seams, chrome free, for assembly work

PALM MATERIAL Microthan®+
BACK MATERIAL Polyester
LINING Unlined
GRIP PATTERN Diamond grip pattern
FASTENING Elasticated 360°
COLOUR Grey, black, yellow
SIZE RANGE 7, 8, 9, 10, 11, 12, 13
LENGTH RANGE 195-235 mm
PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Hook with hangtag
FEATURES Chrome free, reinforced index finger, reinforced seams, padded palm, pre-curved fingers, specially designed thumb, short model, ergonomically shaped, specially designed details
PROPERTIES Good fingertip sensitivity, flexible, very durable, excellent grip, perfect fit, extra comfortable
PRIMARY ENVIRONMENTS OF USE Slippery environments, dry environments, oil and greasy environments, dirty environments



MicroThan®+ ■ TEGERA®

TEGERA® 9120

Synthetic leather glove, unlined, 0,7 mm Microthan®+, diamond grip pattern, nylon, Cat. II, reinforced seams, chrome free, for assembly work

PALM MATERIAL Microthan®+
BACK MATERIAL Nylon
LINING Unlined
GRIP PATTERN Diamond grip pattern
FASTENING Velcro®
COLOUR Black, grey, yellow
SIZE RANGE 6, 7, 8, 9, 10, 11
LENGTH RANGE 198-243 mm
PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Hook with hangtag

FEATURES Chrome free, reinforced index finger, reinforced seams, reinforced fingertips, pre-curved fingers, specially designed thumb, short model, ergonomically shaped, reflector, specially designed details
PROPERTIES Good fingertip sensitivity, flexible, very durable, excellent grip, perfect fit, extra comfortable
PRIMARY ENVIRONMENTS OF USE Dark environments, slippery environments, dry environments, clean environments, moist environments, oil and greasy environments, dirty environments



MicroThan®+ ■ TEGERA®

TEGERA® 9900

Synthetic leather glove, unlined, 0,75-0,80 mm Polythan®, polypropylene, Cat. II, reinforced index finger, high-viz colour, water repellent palm, for allround work

PALM MATERIAL Polythan®
BACK MATERIAL Polypropylene
LINING Unlined
FASTENING Elasticated 360°
COLOUR Orange, yellow, black
SIZE RANGE 8, 9, 10, 11, 12
LENGTH RANGE 195-233 mm
PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Hook with hangtag
FEATURES Chrome free, high-viz colour, reinforced palm, pre-curved fingers, specially designed thumb, water repellent palm, reflector, soft, specially designed details
PROPERTIES Good fingertip sensitivity, flexible, durable, good grip, good fit, comfortable
PRIMARY ENVIRONMENTS OF USE Dark environments, dry environments, clean environments, dirty environments



PolyThan® ■ TEGERA®

TEGERA® 9901

Synthetic leather glove, unlined, 0,75-0,80 mm Polythan®, polypropylene, Cat. II, reinforced index finger, chrome free, water repellent palm, for allround work

PALM MATERIAL Polythan®
BACK MATERIAL Polypropylene
LINING Unlined
FASTENING Elasticated 360°
COLOUR Yellow, black
SIZE RANGE 8, 9, 10, 11, 12
LENGTH RANGE 202-233 mm
PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Hook with hangtag
FEATURES Chrome free, reinforced index finger, reinforced palm, pre-curved fingers, specially designed thumb, water repellent palm, ergonomically shaped, soft
PROPERTIES Good fingertip sensitivity, flexible, durable, good grip, good fit, comfortable
PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments, dirty environments



PolyThan® ■ TEGERA®

TEGERA® 9902

Synthetic leather glove, unlined, 0,75-0,80 mm Polythan®, polypropylene, Cat. II, reinforced index finger, chrome free, water repellent palm, for allround work

PALM MATERIAL Polythan®
BACK MATERIAL Polypropylene
LINING Unlined
FASTENING Elasticated 360°
COLOUR Grey, black, yellow
SIZE RANGE 8, 9, 10, 11, 12
LENGTH RANGE 202-233 mm
PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Hook with hangtag

FEATURES Chrome free, reinforced index finger, reinforced palm, reinforced seams, pre-curved fingers, specially designed thumb, water repellent palm, ergonomically shaped, soft
PROPERTIES Good fingertip sensitivity, flexible, durable, good grip, good fit, comfortable
PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments, dirty environments



PolyThan® ■ TEGERA®

TEGERA® 9205

Synthetic leather glove, unlined, 0,8 mm Macrothan®, polyester, Cat. II, chrome free, breathable, for allround work

PALM MATERIAL Macrothan®
BACK MATERIAL Polyester
LINING Unlined
FASTENING Elasticated 360°
COLOUR Black, grey, yellow
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 200-240 mm
PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Hook with hangtag

FEATURES Chrome free, reinforced index finger, reinforced palm, reinforced seams, reinforced fingertips, reinforced fingers and thumb, padded palm, pre-curved fingers, specially designed thumb, knuckle protection, ergonomically shaped, reflector, soft, specially designed details
PROPERTIES Flexible, durable, perfect fit, extra comfortable, very breathable
PRIMARY ENVIRONMENTS OF USE Dark environments, dry environments, dirty environments




MacroThan® ■ TEGERA®

TEGERA® 9200

Synthetic leather glove, unlined, 0,8 mm Macrothan®, polyester, Cat. II, chrome free, breathable, for allround work

PALM MATERIAL Macrothan®
BACK MATERIAL Polyester
LINING Unlined
FASTENING Velcro®
COLOUR Black, grey, yellow
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 215-255 mm
PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Hook with hangtag

FEATURES Chrome free, reinforced index finger, reinforced palm, reinforced seams, reinforced fingertips, pre-curved fingers, specially designed thumb, ergonomically shaped, reflector, specially designed details
PROPERTIES Flexible, durable, perfect fit, extra comfortable
PRIMARY ENVIRONMENTS OF USE Dark environments, dry environments, dirty environments



MacroThan®  TEGERA®

TEGERA® 9125

Synthetic leather glove, half-lined, 0,7 mm Microthan®+, diamond grip pattern, polyester, tricot, Cat. II, reinforced seams, chrome free, for allround work

PALM MATERIAL Microthan®+
BACK MATERIAL Polyester
LINING Half-lined
LINING MATERIAL Tricot
GRIP PATTERN Diamond grip pattern
FASTENING Elasticated 360°
COLOUR Black, grey, yellow
SIZE RANGE 7, 8, 9, 10, 11, 12, 13
LENGTH RANGE 223-253 mm
PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Hook with hangtag

FEATURES Chrome free, reinforced index finger, reinforced seams, reinforced fingertips, padded palm, pre-curved fingers, specially designed thumb, knuckle protection, short model, ergonomically shaped, reflector, specially designed details
PROPERTIES Good fingertip sensitivity, flexible, very durable, excellent grip, perfect fit, extra comfortable
PRIMARY ENVIRONMENTS OF USE Dark environments, dry environments, clean environments, dirty environments




MicroThan®+  TEGERA®

TEGERA® 9161

Synthetic leather glove, half-lined, 0,7 mm Microthan®+, diamond grip pattern, polyester, bamboo, Cat. II, reinforced seams, chrome free, for allround work

PALM MATERIAL Microthan®+
BACK MATERIAL Polyester
LINING Half-lined
LINING MATERIAL Bamboo
GRIP PATTERN Diamond grip pattern
FASTENING Elasticated 360°
COLOUR Black, silver
SIZE RANGE 8, 9, 10, 11, 12
LENGTH RANGE 225-265 mm
PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Hook with hangtag

FEATURES Chrome free, reinforced index finger, reinforced seams, reinforced fingertips, specially designed thumb, windproof back, short model, ergonomically shaped, reflector, specially designed details
PROPERTIES Good fingertip sensitivity, flexible, very durable, excellent grip, perfect fit, extra comfortable
PRIMARY ENVIRONMENTS OF USE Dark environments, windy environments, slippery environments, dry environments, cold environments, moist environments, oil and greasy environments, dirty environments



MicroThan®+  TEGERA®

TEGERA® 9111

Synthetic leather glove, half-lined, 0,7 mm Microthan®+, diamond grip pattern, cotton, flannel, Cat. II, reinforced seams, chrome free, for allround work

PALM MATERIAL Microthan®+
BACK MATERIAL Cotton
LINING Half-lined
LINING MATERIAL Flannel
GRIP PATTERN Diamond grip pattern
FASTENING Elasticated 180°
COLOUR Black, grey, yellow
SIZE RANGE 6, 7, 8, 9, 10, 11
LENGTH RANGE 227-265 mm
PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Hook with hangtag

FEATURES Chrome free, reinforced index finger, reinforced palm, reinforced seams, reinforced fingertips, padded palm, pre-curved fingers, specially designed thumb, ergonomically shaped, reflector, specially designed details
PROPERTIES Good fingertip sensitivity, flexible, very durable, excellent grip, perfect fit, extra comfortable
PRIMARY ENVIRONMENTS OF USE Dark environments, slippery environments, dry environments, clean environments, moist environments, oil and greasy environments, dirty environments



MicroThan®+ **TEGERA®**

TEGERA® 326

Synthetic leather glove, unlined, 0,7 mm synthetic leather, braided structure, polyester, Cat. II, reinforced fingertips, water repellent palm, density against dirt, for assembly work

PALM MATERIAL Synthetic leather
BACK MATERIAL Polyester
LINING Unlined
GRIP PATTERN Braided structure
FASTENING Elasticated 180°
COLOUR Black, blue
SIZE RANGE 6, 7, 8, 9, 10, 11, 12, 13
LENGTH RANGE 201-251 mm
PAIRS PER PACKAGE/CARTON 12/60
PAIRS PER HANGTAG 3

DISPLAY Hangtag with euro slot
FEATURES Chrome free, breathable back, reinforced seams, reinforced fingertips, specially designed thumb, water repellent palm, density against dirt

PROPERTIES Good fingertip sensitivity, flexible, durable, good grip
PRIMARY ENVIRONMENTS OF USE Slippery environments, dry environments, wet environments, moist environments, dirty environments



TEGERA®

TEGERA® 414

Synthetic leather glove, unlined, 0,7 mm synthetic leather, polyester, Cat. II, chrome free, for allround work

PALM MATERIAL Synthetic leather
BACK MATERIAL Polyester
LINING Unlined
FASTENING Elasticated 360°
COLOUR Grey, black, blue
SIZE RANGE 8, 9, 10, 11
LENGTH RANGE 250-270 mm

PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Hook with hangtag
FEATURES Chrome free, breathable back, elastic
PROPERTIES Flexible, durable, good grip, good fit, comfortable, breathable
PRIMARY ENVIRONMENTS OF USE Dry environments, dirty environments



TEGERA®

TEGERA® 955

Synthetic glove, nitril coated fabric, smooth finish, cotton, Cat. II, water and oil repellent palm, for allround work

PALM MATERIAL Nitril coated fabric

BACK MATERIAL Cotton

GRIP PATTERN Smooth finish

COLOUR Red, beige

SIZE RANGE 7, 8, 9, 10, 11

LENGTH RANGE 230 - 260mm

PAIRS PER PACKAGE/CARTON 12/120

FEATURES Breathable back, water and oil repellent palm

PROPERTIES Durable

PRIMARY ENVIRONMENTS OF USE Wet environments, moist environments, oil and greasy environments, dirty environments



Cat. II



EN 388
4122



 **TEGERA®**



LEATHER – FEATURES AND BENEFITS

Leather is strong, supple and adapts to changes in weather. All of our leather comes from carefully selected and tanned hides to ensure a high level of durability and flexibility. Chrome-free leather gloves are also available. Before processing, the hide is split into an outer (full-grain) and inner (split) layer.

- **Full-grain leather** is soft and flexible with a high level of dexterity and comfort.
- **Split leather** has a coarser surface for better grip, heat-insulating properties and flexibility regardless of its thickness.
- **Cowhide or oxhide** is extremely durable.
- **Goatskin** is thin and supple. It provides a high level of touch perception - the glove conforms to the movements of the hand.
- **Pigskin** is soft and breathes well.

More detailed information on leather can be found in the chapter "Protect your hands" and the pages "Understanding materials".

WORK GLOVES - GENERAL HANDLING / MEDIUM WEIGHT

TEGERA® 294

Leather glove, unlined, 0,7-0,8 mm full grain goatskin, polyester, polypropylene, Cat. II, wind and waterproof back, water repellent leather, for allround work

PALM MATERIAL Full grain goatskin
BACK MATERIAL Polyester, polypropylene
LINING Unlined
FASTENING Elasticated 180°
COLOUR Black, white
SIZE RANGE 8, 9, 10, 11
LENGTH RANGE 255-280 mm
PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Hook with hangtag
FEATURES Reinforced fingertips, wind and waterproof back, water repellent leather
PROPERTIES High level of protection, good fingertip sensitivity, durable, perfect fit
PRIMARY ENVIRONMENTS OF USE Windy environments, outdoors, moist environments, dirty environments



TEGERA®

TEGERA® 671

Leather glove, unlined, 0,7-0,8 mm full grain goatskin, cotton, Cat. II, reinforced index finger, reinforced fingers and thumb, for assembly work

PALM MATERIAL Full grain goatskin
BACK MATERIAL Cotton
LINING Unlined
FASTENING Elasticated 180°
COLOUR Grey, white
SIZE RANGE 6, 7, 8, 9, 10, 11
LENGTH RANGE 210-260 mm

PAIRS PER PACKAGE/CARTON 12/120
DISPLAY Thread
FEATURES Reinforced index finger, reinforced fingers and thumb
PROPERTIES High level of protection, good fingertip sensitivity, durable, good fit
PRIMARY ENVIRONMENTS OF USE Dry environments, dirty environments



TEGERA®

TEGERA® 640

Leather glove, unlined, 0,7-0,8 mm full grain goatskin, Cat. II, reinforced index finger, reinforced seams, for assembly work

PALM MATERIAL Full grain goatskin
BACK MATERIAL Full grain goatskin
LINING Unlined
FASTENING Elasticated 180°
COLOUR White
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 230-260 mm

PAIRS PER PACKAGE/CARTON 12/120
DISPLAY Thread
FEATURES Reinforced index finger, reinforced seams
PROPERTIES High level of protection, good fingertip sensitivity, durable, good fit
PRIMARY ENVIRONMENTS OF USE Harsh environments



TEGERA®

TEGERA® 6751

Leather glove, unlined, 0,7-0,8 mm full grain goatskin, cotton, Cat. II, reinforced index finger, reinforced fingers and thumb, for assembly work

PALM MATERIAL Full grain goatskin
BACK MATERIAL Cotton
LINING Unlined
FASTENING Elasticated 180°
COLOUR Grey, white
SIZE RANGE 7, 8, 9, 10, 11, 12
LENGTH RANGE 230-290 mm

PAIRS PER PACKAGE/CARTON 12/120
DISPLAY Thread
FEATURES Reinforced index finger, reinforced fingers and thumb
PROPERTIES High level of protection, good fingertip sensitivity, durable, good fit
PRIMARY ENVIRONMENTS OF USE Harsh environments



TEGERA®

TEGERA® 360

Leather glove, unlined, 0,6-0,7 mm full grain goatskin, cotton, Cat. II, reinforced thumb, chrome free, for assembly work

PALM MATERIAL Full grain goatskin
BACK MATERIAL Cotton
LINING Unlined
FASTENING Elasticated 180°
COLOUR Grey, yellow
SIZE RANGE 7, 8, 9, 10, 11

LENGTH RANGE 230-270 mm
PAIRS PER PACKAGE/CARTON 12/120
DISPLAY Thread
FEATURES Chrome free, reinforced thumb
PROPERTIES High level of protection, good fingertip sensitivity, durable, good fit



TEGERA®

TEGERA® 680

Leather glove, unlined, 0,7-0,9 mm full grain goatskin, cotton, Cat. II, reinforced index finger, reinforced fingers and thumb, for allround work

PALM MATERIAL Full grain goatskin
BACK MATERIAL Cotton
LINING Unlined
FASTENING Elasticated 180°
COLOUR Grey, white
SIZE RANGE 8, 9, 10, 11
LENGTH RANGE 245-280 mm

PAIRS PER PACKAGE/CARTON 12/120
DISPLAY Thread
FEATURES Reinforced index finger, reinforced fingers and thumb
PROPERTIES High level of protection
PRIMARY ENVIRONMENTS OF USE Harsh environments



TEGERA®

TEGERA® 690

Leather glove, unlined, 0,7-0,9 mm full grain goatskin, polyester, Cat. II, reinforced fingers and thumb, water repellent leather, for allround work

PALM MATERIAL Full grain goatskin
BACK MATERIAL Polyester
LINING Unlined
FASTENING Elasticated 180°
COLOUR Black, green
SIZE RANGE 8, 9, 10, 11
LENGTH RANGE 260-280 mm

PAIRS PER PACKAGE/CARTON 12/120
DISPLAY Thread
FEATURES Reinforced index finger, reinforced fingers and thumb, water repellent leather
PROPERTIES High level of protection, good fingertip sensitivity, durable, good fit
PRIMARY ENVIRONMENTS OF USE Moist environments



TEGERA®

TEGERA® 888

Leather glove, unlined, 0,7-0,8 mm full grain cowhide, cotton, Cat. II, reinforced index finger, reinforced fingers and thumb, for allround work

PALM MATERIAL Full grain cowhide
BACK MATERIAL Cotton
LINING Unlined
FASTENING Elasticated 360°
COLOUR Grey, blue, black, white
SIZE RANGE 6, 7, 8, 9, 10, 11, 12
LENGTH RANGE 225-280 mm

PAIRS PER PACKAGE/CARTON 12/120
DISPLAY Hook with hangtag
FEATURES Reinforced index finger, reinforced fingers and thumb
PROPERTIES High level of protection, good fingertip sensitivity, durable, good fit
PRIMARY ENVIRONMENTS OF USE Harsh environments



TEGERA®

TEGERA® 52

Leather glove, unlined, 0,7-0,8 mm split grain cowhide, cotton, Cat. II, for assembly work

PALM MATERIAL Split grain cowhide
BACK MATERIAL Cotton
LINING Unlined
FASTENING Elasticated 180°
COLOUR Grey, white
SIZE RANGE 7, 8, 9, 10, 11

LENGTH RANGE 220-250 mm
PAIRS PER PACKAGE/CARTON 12/120
DISPLAY Thread
PROPERTIES High level of protection, good fingertip sensitivity, durable, good fit



TEGERA®

TEGERA® 89

Leather glove, unlined, 0,8-0,9 mm full grain pigskin, cotton, Cat. II, reinforced index finger, reinforced thumb

PALM MATERIAL Full grain pigskin
BACK MATERIAL Cotton, full grain pigskin
LINING Unlined
FASTENING Elasticated 180°
COLOUR White, beige
SIZE RANGE 8, 10, 11
LENGTH RANGE 240-260 mm

PAIRS PER PACKAGE/CARTON 6/120
DISPLAY Thread
FEATURES Reinforced fingertips, reinforced thumb
PROPERTIES High level of protection, durable
PRIMARY ENVIRONMENTS OF USE Dry environments



TEGERA®

TEGERA® 246

Leather glove, half-lined, 0,7-0,8 mm full grain goatskin, spandex, fleece, Cat. II, reinforced index finger, reinforced fingertips, for allround work

PALM MATERIAL Full grain goatskin
BACK MATERIAL Spandex
LINING Half-lined
LINING MATERIAL Fleece
FASTENING Elasticated 360°
COLOUR Blue, black, white
SIZE RANGE 8, 9, 10, 11
LENGTH RANGE 220-260 mm

PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Hook with hangtag
FEATURES Reinforced index finger, reinforced fingertips, pre-curved fingers
PROPERTIES High level of protection, good fingertip sensitivity, flexible, durable, good grip, perfect fit, extra comfortable, warm
PRIMARY ENVIRONMENTS OF USE All-year use, harsh environments



TEGERA®

TEGERA® 290

Leather glove, half-lined, 0,8-0,9 mm full grain goatskin of top quality, polyester, polypropylene, bamboo, fleece, Cat. II, wind and waterproof back, water repellent leather, for allround work

PALM MATERIAL Full grain goatskin of top quality

BACK MATERIAL Polyester, polypropylene

LINING Half-lined

LINING MATERIAL Bamboo, fleece

FASTENING Elasticated 180°

COLOUR Green high-viz

SIZE RANGE 9, 10, 11, 12

PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Hook with hangtag

FEATURES High-viz colour, reinforced fingers and thumb, water repellent palm, wind and waterproof back

PROPERTIES High level of protection, good fingertip sensitivity, flexible, very durable, perfect fit, extra comfortable, warm

PRIMARY ENVIRONMENTS OF USE Windy environments, all-year use, moist environments, harsh environments



Cat. II



EN 388
3111



TEGERA®

TEGERA® 189

Leather glove, half-lined, 0,8-0,9 mm full grain pigskin, cotton, jersey, Cat. II, reinforced fingertips, reinforced thumb, for allround work

PALM MATERIAL Full grain pigskin

BACK MATERIAL Cotton, full grain pigskin

LINING Half-lined

LINING MATERIAL Jersey

FASTENING Elasticated 180°

COLOUR White, beige

SIZE RANGE 8, 9, 10, 11

LENGTH RANGE 240-270 mm

PAIRS PER PACKAGE/CARTON 6/120

DISPLAY Thread

FEATURES Reinforced fingertips, reinforced thumb

PROPERTIES High level of protection

PRIMARY ENVIRONMENTS OF USE All-year use



Cat. II



EN 388
2122



TEGERA®

KNITTED AND DIPPED GLOVES – FEATURES AND BENEFITS

We work with specially developed hand moulds to ensure consistency in fit, quality and ergonomic features. We also control the mixture of materials to suit different work applications and maximise features such as dexterity, grip, durability and comfort.

LINER MATERIALS

- **Polyester** is strong and flexible with low moisture absorption.
- **Acrylic** is soft with good thermal insulation properties and a resemblance to wool.
- **Nylon** is very strong and flexible with low moisture absorption.
- **Cotton** is very comfortable, has high moisture absorption and is ideal for lighter jobs.

DIPPING MATERIALS

- **Polyurethane (PU)** provides excellent grip in both wet and dry environments. It protects against vegetable and animal fats but is less effective against moisture penetration.
- **Nitrile (NBR)** is highly resistant to cuts, provides acceptable grip and is effective against moisture penetration.
- **Nitrile foam** is flexible and provides good grip. It is also effective against moisture penetration.
- **Latex/natural rubber (NR)** is highly elastic and provides good grip but is sensitive to UV light.
- **Polyvinyl chloride (PVC/VINYL)** is suitable for heavy and wet work.

More detailed information on knitted and dipped gloves can be found in the chapter "Protect your hands" and the pages "Understanding materials".

WORK GLOVES - GENERAL HANDLING / MEDIUM WEIGHT

TEGERA® 940

Synthetic glove, waterbased PU, palm-dipped, nylon, 13 gg, smooth finish, Cat. II, DMF free, for fine assembly work

LINER MATERIAL Nylon, 13 gg

DIPPING Palm-dipped

DIPPING MATERIAL Waterbased PU

GRIP PATTERN Smooth finish

COLOUR White

LENGTH RANGE 220 - 270 mm

PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag with euro slot

FEATURES DMF free, breathable back, water and oil repellent palm, anatomically designed

PROPERTIES High level of protection, good fingertip sensitivity, flexible, very durable, good fit, comfortable, breathable, light

PRIMARY ENVIRONMENTS OF USE Moist environments, oil and greasy environments, dirty environments



Cat. II



EN 388
3131



TEGERA® 941

Synthetic glove, waterbased PU, palm-dipped, nylon, 13 gg, smooth finish, Cat. II, DMF free, for fine assembly work

LINER MATERIAL Nylon, 13 gg

DIPPING Palm-dipped

DIPPING MATERIAL Waterbased PU

GRIP PATTERN Smooth finish

COLOUR Grey

LENGTH RANGE 220 - 270 mm

PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag with euro slot

FEATURES DMF free, breathable back, water and oil repellent palm, anatomically designed

PROPERTIES High level of protection, good fingertip sensitivity, flexible, durable, good fit, comfortable, breathable, light

PRIMARY ENVIRONMENTS OF USE Moist environments, oil and greasy environments, dirty environments



Cat. II



EN 388
3131



TEGERA® 942

Synthetic glove, waterbased PU, palm-dipped, nylon, 13 gg, smooth finish, Cat. II, DMF free, for fine assembly work

LINER MATERIAL Nylon, 13 gg

DIPPING Palm-dipped

DIPPING MATERIAL Waterbased PU

GRIP PATTERN Smooth finish

COLOUR Black

LENGTH RANGE 220 - 270 mm

PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag with euro slot

FEATURES DMF free, breathable back, water and oil repellent palm, anatomically designed

PROPERTIES High level of protection, good fingertip sensitivity, flexible, durable, good fit, comfortable, breathable, light

PRIMARY ENVIRONMENTS OF USE Moist environments, oil and greasy environments, dirty environments



Cat. II



EN 388
3131



TEGERA® 721

Synthetic glove, nitrile, 3/4 dipped, smooth finish, Cat. II, water and oil repellent palm, for assembly work

DIPPING 3/4 dipped

DIPPING MATERIAL Nitrile

GRIP PATTERN Smooth finish

COLOUR Yellow, white

SIZE RANGE 7, 8, 9, 10, 11

LENGTH RANGE 230 - 270 mm

PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Hook with hangtag

FEATURES Water and oil repellent palm and knuckle

PROPERTIES Flexible, durable, comfortable

PRIMARY ENVIRONMENTS OF USE Wet environments, moist environments, oil and greasy environments, dirty environments



Cat. II



EN 388
4111



TEGERA® 722

Synthetic glove, nitrile, 3/4 dipped, polyester, 13 gg, smooth finish, Cat. II, water and oil repellent palm, for assembly work

LINER MATERIAL Polyester, 13 gg

DIPPING 3/4 dipped

DIPPING MATERIAL Nitrile

GRIP PATTERN Smooth finish

COLOUR White, yellow

SIZE RANGE 6, 7, 8, 9, 10, 11

LENGTH RANGE 220 - 270 mm

PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Hook with hangtag

FEATURES Water and oil repellent palm and knuckle

PROPERTIES Flexible, good fit, light

PRIMARY ENVIRONMENTS OF USE Wet environments, moist environments, oil and greasy environments, dirty environments



Cat. II



EN 388
3122



TEGERA® 723

Synthetic glove, nitrile, 3/4 dipped, interlock, 24 gg, smooth finish, Cat. II, water and oil repellent palm, for assembly work

LINER MATERIAL Interlock, 24 gg
DIPPING 3/4 dipped
DIPPING MATERIAL Nitrile
GRIP PATTERN Smooth finish
COLOUR Blue, white
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 230 - 280mm

PAIRS PER PACKAGE/CARTON 12/120
DISPLAY Hook with hangtag
FEATURES Water and oil repellent palm and knuckle
PROPERTIES Flexible, light
PRIMARY ENVIRONMENTS OF USE Wet environments, moist environments, oil and greasy environments, dirty environments



TEGERA®

TEGERA® 2207

Synthetic glove, nitrile, 3/4 dipped, smooth finish, Cat. II, oil and grease resistant, for allround work

DIPPING 3/4 dipped
DIPPING MATERIAL Nitrile
GRIP PATTERN Smooth finish
COLOUR Blue, beige
SIZE RANGE 8, 9, 10
LENGTH RANGE 240 - 280mm

PAIRS PER PACKAGE/CARTON 12/72
FEATURES Water and oil repellent palm and knuckle
PROPERTIES Durable
PRIMARY ENVIRONMENTS OF USE Wet environments, moist environments, oil and greasy environments, dirty environments



TEGERA®

TEGERA® 2805

Synthetic glove, nitrile, fully dipped, cotton, smooth finish, Cat. II, oil and grease resistant, for allround work

LINER MATERIAL Cotton
DIPPING Fully dipped
DIPPING MATERIAL Nitrile
GRIP PATTERN Smooth finish
COLOUR Blue
SIZE RANGE 8, 10

LENGTH RANGE 240 - 270mm
PAIRS PER PACKAGE/CARTON 12/72
PROPERTIES Durable
PRIMARY ENVIRONMENTS OF USE Wet environments, moist environments, oil and greasy environments, dirty environments



TEGERA®

TEGERA® 747

Synthetic glove, nitrile, fully dipped, smooth finish, Cat. II, water and oil repellent, for assembly work

DIPPING Fully dipped
DIPPING MATERIAL Nitrile
GRIP PATTERN Smooth finish
COLOUR Blue, white
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 235 - 270mm

PAIRS PER PACKAGE/CARTON 12/120
DISPLAY Hook with hangtag
FEATURES Water and oil repellent
PROPERTIES Flexible
PRIMARY ENVIRONMENTS OF USE Wet environments, moist environments, oil and greasy environments, dirty environments



TEGERA®

TEGERA® 617

Synthetic glove, latex, palm-dipped, nylon, 13 gg, granulated, Cat. II, breathable back, waterproof palm, for allround work

LINER MATERIAL Nylon, 13 gg
DIPPING Palm-dipped
DIPPING MATERIAL Latex
GRIP PATTERN Granulated
FASTENING Velcro®
COLOUR Black, blue
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 230 - 270mm

PAIRS PER PACKAGE/CARTON 12/120
DISPLAY Hook with hangtag
FEATURES Breathable back
PROPERTIES Flexible, durable, good grip, good fit, comfortable, breathable
PRIMARY ENVIRONMENTS OF USE Slippery environments, wet environments, moist environments, dirty environments



TEGERA®

TEGERA® 618

Synthetic glove, latex foam, 3/4 dipped, nylon, foam grip pattern, Cat. II, high-viz colour, water repellent, for allround work

LINER MATERIAL Nylon
DIPPING 3/4 dipped
DIPPING MATERIAL Latex foam
GRIP PATTERN Foam grip pattern
COLOUR Green high-viz, black
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 230 - 270mm

PAIRS PER PACKAGE/CARTON 12/120
DISPLAY Hook with hangtag
FEATURES High-viz colour, soft
PROPERTIES Flexible, good grip, good fit, light
PRIMARY ENVIRONMENTS OF USE Slippery environments, wet environments, moist environments, dirty environments



TEGERA®

TEGERA® 614

Synthetic glove, latex, palm-dipped, cotton, polyester, 10 gg, granulated, Cat. II, breathable back, waterproof palm, anatomically designed, for allround work

LINER MATERIAL Cotton, polyester, 10 gg
DIPPING Palm-dipped
DIPPING MATERIAL Latex
GRIP PATTERN Granulated
COLOUR Blue, grey
SIZE RANGE 8, 10
LENGTH RANGE 230 - 290mm

PAIRS PER PACKAGE/CARTON 12/120
DISPLAY Hook with hangtag
FEATURES Breathable back, waterproof palm
PROPERTIES Flexible, durable, good grip
PRIMARY ENVIRONMENTS OF USE Wet environments, moist environments, dirty environments



 **TEGERA®**

TEGERA® 2807

Synthetic glove, PVC (Vinyl), fully dipped, jersey, granulated, Cat. II, water and oil repellent, for allround work

LINER MATERIAL Jersey
DIPPING Fully dipped
DIPPING MATERIAL PVC (Vinyl)
GRIP PATTERN Granulated
COLOUR Black
SIZE RANGE 10
LENGTH RANGE 270mm

PAIRS PER PACKAGE/CARTON 6/60
FEATURES Water and oil repellent, moisture resistant, anatomically designed
PROPERTIES Durable, good grip
PRIMARY ENVIRONMENTS OF USE Slippery environments, wet environments, moist environments, oil and greasy environments, dirty environments



 **TEGERA®**

TEXTILE GLOVES – FEATURES AND BENEFITS

We control the mixture of materials to suit different work applications and maximise features such as dexterity, grip, durability and comfort.

LINER MATERIALS

Please remember that synthetic liner materials are not to be used in contact with flames or high temperatures. Natural cotton, on the other hand, is flammable but the way it burns prevents it from adhering to the skin. **Knitting gauge (gg)** refers to the number of stitches per inch in a garment. A lower number translates into a thicker glove suitable for rougher uses. A higher number means a thinner glove for precision work.

- **Polyester** is strong and flexible with low moisture absorption.
- **Acrylic** is soft with good thermal insulation properties and a resemblance to wool.
- **Nylon** is very strong and flexible with low moisture absorption.
- **Viscose** is a refined cellulose fibre that is soft and comfortable with high moisture absorption (similar to cotton).
- **Cotton** is very comfortable, has high moisture absorption and is ideal for lighter jobs.

More detailed information on textile gloves can be found in the chapter "Protect your hands" and the pages "Understanding materials".

WORK GLOVES - GENERAL HANDLING / MEDIUM WEIGHT

TEGERA® 319

Textile glove, double knitted, cotton, nylon, 13 gg, Cat. II, phthalate-free, for assembly work

LINER MATERIAL Double knitted, cotton, nylon, 13 gg

COLOUR White

SIZE RANGE 6, 7, 8, 9, 10, 11

LENGTH RANGE 240-290 mm

PAIRS PER PACKAGE/CARTON 12/120

FEATURES Phthalate-free, soft

PROPERTIES High level of protection, good fingertip sensitivity, flexible, very durable, perfect fit, extra comfortable, breathable

PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments



Cat. II



EN 388
224X



TEGERA®

TEGERA® 915

Textile glove, cotton, Cat. I, for allround work

PALM MATERIAL Cotton

BACK MATERIAL Cotton

COLOUR Beige

SIZE RANGE 8, 10

LENGTH RANGE 200-230

PAIRS PER PACKAGE/CARTON 12/600

FEATURES Unbleached cotton, soft

PROPERTIES Flexible

PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments



Cat. I

EN 420

Council Directive
89/686/EEC
(PPE Directive)




TEGERA®

TEGERA® 911

Textile glove, cotton, Cat. I, for allround work

PALM MATERIAL Cotton
BACK MATERIAL Cotton
COLOUR Beige
SIZE RANGE 8, 10
PAIRS PER PACKAGE/CARTON 12/600

FEATURES Unbleached cotton, soft
PROPERTIES Light
PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments




TEGERA®

TEGERA® 922

Textile glove, cotton, Lycra®, polyester, Cat. I, for allround work

LINER MATERIAL Cotton, Lycra®, polyester
FASTENING Elasticated 360°
COLOUR White
SIZE RANGE 8, 10
PAIRS PER PACKAGE/CARTON 12/300

DISPLAY Bag
FEATURES Soft
PROPERTIES Good fingertip sensitivity, flexible, comfortable, breathable, light
PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments



TEGERA®

TEGERA® 630

Textile glove, PVC (Vinyl)-dots phthalate-free, nylon, 13 gg, dots, Cat. II, for allround work

PALM MATERIAL PVC (Vinyl)-dots phthalate-free
LINER MATERIAL Nylon, 13 gg
GRIP PATTERN Dots
COLOUR White, blue
SIZE RANGE 6, 7, 8, 9, 10
LENGTH RANGE 200-260 mm

PAIRS PER PACKAGE/CARTON 12/144
DISPLAY Hook with hangtag
FEATURES Phthalate-free, soft, washable in 30° C
PROPERTIES Good fingertip sensitivity, flexible, durable, good grip, good fit, comfortable, light
PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments



TEGERA®

TEGERA® 4635

Textile glove, PVC (Vinyl), phthalate-free, acrylic, polyester, dots, Cat. II, for allround work

LINER MATERIAL Acrylic, polyester
MATERIAL PVC (Vinyl), phthalate-free
GRIP PATTERN Dots
FASTENING Elasticated 360°
COLOUR Green
SIZE RANGE 8, 10
LENGTH RANGE 240-260

PAIRS PER PACKAGE/CARTON 12/120
DISPLAY Bag
FEATURES Phthalate-free, soft
PROPERTIES Warm, light
PRIMARY ENVIRONMENTS OF USE Cold environments



Cat. II



EN 388
1230



 **TEGERA®**



HEAVY WEIGHT

You work with rough materials so you need gloves made from strong, hardwearing materials.

LEATHER – FEATURES AND BENEFITS

Leather is strong, supple and adapts to changes in weather. All of our leather comes from carefully selected and tanned hides to ensure a high level of durability and flexibility. Chrome-free leather gloves are also available. Before processing, the hide is split into an outer (full-grain) and inner (split) layer.

- **Full-grain leather** is soft and flexible with a high level of dexterity and comfort.
- **Split leather** has a coarser surface for better grip, heat-insulating properties and flexibility regardless of its thickness.
- **Cowhide or oxhide** is extremely durable.
- **Goatskin** is thin and supple. It provides a high level of touch perception - the glove conforms to the movements of the hand.
- **Pigskin** is soft and breathes well.

More detailed information on leather can be found in the chapter "Protect your hands" and the pages "Understanding materials".

TEGERA® 363

Leather glove, unlined, 1,2-1,4 mm full grain cowhide of top quality, cotton, Cat. II, reinforced fingers and thumb, chrome free, for allround work

PALM MATERIAL Full grain cowhide of top quality

BACK MATERIAL Cotton

LINING Unlined

FASTENING Elasticated 180°

COLOUR Grey, yellow

SIZE RANGE 8, 9, 10, 11

LENGTH RANGE 240-275 mm

PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Thread

FEATURES Chrome free, reinforced index finger, reinforced fingers and thumb

PROPERTIES High level of protection, very durable

PRIMARY ENVIRONMENTS OF USE Harsh environments



Cat. II



EN 388
3121



TEGERA®

TEGERA® 55

Leather glove, half-lined, 1,2-1,4 mm full grain oxhide of top quality, cotton, jersey, Cat. II, reinforced index finger, reinforced fingers and thumb, for heavy work

PALM MATERIAL Full grain oxhide of top quality
BACK MATERIAL Cotton
LINING Half-lined
LINING MATERIAL Jersey
FASTENING Elasticated 180°
COLOUR Grey, white
SIZE RANGE 8, 9, 10, 11
LENGTH RANGE 250-280 mm

PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Thread
FEATURES Reinforced index finger, reinforced fingers and thumb
PROPERTIES High level of protection, good fingertip sensitivity, flexible, very durable, good grip, good fit, comfortable
PRIMARY ENVIRONMENTS OF USE Harsh environments



TEGERA®

TEGERA® 103

Leather glove, half-lined, 1,0-1,1 mm full grain cowhide, cotton, jersey, Cat. II, reinforced index finger, reinforced fingers and thumb, for heavy work

PALM MATERIAL Full grain cowhide
BACK MATERIAL Cotton, full grain cowhide
LINING Half-lined
LINING MATERIAL Jersey
FASTENING Elasticated 180°
COLOUR Black, beige
SIZE RANGE 8, 9, 10, 11

LENGTH RANGE 240-290 mm
PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Thread
FEATURES Reinforced index finger, reinforced fingers and thumb
PROPERTIES Durable
PRIMARY ENVIRONMENTS OF USE Dirty environments, harsh environments



TEGERA®

TEGERA® 106

Leather glove, half-lined, 1,0-1,1 mm full grain cowhide, cotton, jersey, Cat. II, reinforced index finger, reinforced fingers and thumb, for heavy work

PALM MATERIAL Full grain cowhide
BACK MATERIAL Cotton, full grain cowhide
LINING Half-lined
LINING MATERIAL Jersey
FASTENING Elasticated 180°
COLOUR Blue, beige
SIZE RANGE 7, 8, 9, 10, 11

LENGTH RANGE 220-290 mm
PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Thread
FEATURES Reinforced index finger, reinforced fingers and thumb
PROPERTIES Durable
PRIMARY ENVIRONMENTS OF USE Dirty environments, harsh environments



TEGERA®

TEGERA® 198

Leather glove, half-lined, 1,0-1,2 mm full grain cowhide, nylon, jersey, Cat. II, high-viz colour, reflector, for heavy work

PALM MATERIAL Full grain cowhide
BACK MATERIAL Nylon
LINING Half-lined
LINING MATERIAL Jersey
FASTENING Elasticated 180°
COLOUR Green high-viz, white
SIZE RANGE 8, 10

LENGTH RANGE 240-260 mm
PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Thread
FEATURES High-viz colour, reinforced index finger, reinforced fingers and thumb, reflector
PROPERTIES High level of protection, durable
PRIMARY ENVIRONMENTS OF USE Dark environments, all-year use



TEGERA®

TEGERA® 35

Leather glove, half-lined, 1,2 - 1,4 mm split grain cowhide, cotton, jersey, Cat. II, reinforced index finger, reinforced fingers and thumb, for heavy work

PALM MATERIAL Split grain cowhide
BACK MATERIAL Cotton, split grain cowhide
LINING Half-lined
LINING MATERIAL Jersey
FASTENING Elasticated 180°
COLOUR Yellow, grey
SIZE RANGE 8, 9, 10, 11

LENGTH RANGE 240-270 mm
PAIRS PER PACKAGE/CARTON 6/60
FEATURES Reinforced index finger, reinforced fingers and thumb
PROPERTIES High level of protection
PRIMARY ENVIRONMENTS OF USE Harsh environments



TEGERA®

TEGERA® 50

Leather glove, half-lined, 1,2-1,4 mm full grain oxhide of top quality, split grain oxhide of top quality, jersey, Cat. II, reflector, for heavy work

PALM MATERIAL Full grain oxhide of top quality
BACK MATERIAL Split grain oxhide of top quality
LINING Half-lined
LINING MATERIAL Jersey
FASTENING Elasticated 180°
COLOUR Grey, white
SIZE RANGE 11

LENGTH RANGE 275
PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Thread
FEATURES Reflector
PROPERTIES High level of protection, very durable
PRIMARY ENVIRONMENTS OF USE Warm environments, dirty environments, harsh environments



TEGERA®

TEGERA® 51

Leather glove, half-lined, 1,2-1,4 mm split grain oxhide of top quality, cotton, jersey, Cat. II, reinforced fingers and thumb, for heavy work

PALM MATERIAL Split grain oxhide of top quality

BACK MATERIAL Cotton

LINING Half-lined

LINING MATERIAL Jersey

FASTENING Elasticated 180°

COLOUR Grey, white

SIZE RANGE 9, 10, 11

LENGTH RANGE 250-280 mm

PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Thread

FEATURES Reinforced index finger, reinforced fingers and thumb, reflector

PROPERTIES Highest level of protection, very durable, good fit

PRIMARY ENVIRONMENTS OF USE Harsh environments



Cat. II



EN 388
3243



TEGERA®



A full-page background image with a warm, golden-yellow tint. It depicts a person's hands wearing specialized work gloves, operating a chainsaw. The person is cutting into a large, snow-covered tree trunk. The background shows a snowy landscape with bare trees and a building in the distance. The overall mood is professional and rugged.

SPECIAL REQUIREMENTS GLOVES

In cooperation with our customers, we have developed special gloves of a very high quality made of unique materials that protect against long-term damages. Authentic work environment problems have been the starting point of our development of solutions that protect individuals, companies and society. Our impact-reducing and anti-vibration gloves as well as gloves with wrist support are examples of such solutions.

TEGERA® 9102

Synthetic leather glove, unlined, 0,7 mm Microthan®+, GripForce®, diamond grip pattern, polypropylene, Cat. II, reinforced seams, chrome free, for allround work

PALM MATERIAL Microthan®+, GripForce®
 BACK MATERIAL Polypropylene
 LINING Unlined
 GRIP PATTERN Diamond grip pattern
 FASTENING Elasticated 360°
 COLOUR Black, yellow, white
 SIZE RANGE 7, 8, 9, 10, 11, 12
 LENGTH RANGE 184-225
 PAIRS PER PACKAGE/CARTON 6/60
 DISPLAY Hook with hangtag

FEATURES Chrome free, reinforced index finger, reinforced palm, reinforced seams, reinforced fingers and thumb, pre-curved fingers, specially designed thumb
 PROPERTIES Good fingertip sensitivity, flexible, very durable, excellent grip, perfect fit, comfortable
 PRIMARY ENVIRONMENTS OF USE Slippery environments, dry environments, clean environments, dirty environments, harsh environments



Cat. II

EN 388
4111

MicroThan®+

GRIPFORCE®

TEGERA®

GLOVES FOR CHAIN SAW WORK

TEGERA® 951

Chainsaw glove, 1,0-1,2 mm full grain cowhide of top quality, polyester, Dyneema®, Cat. II, saw protection in the right and left glove, reinforced index finger, reinforced fingertips

PALM MATERIAL Full grain cowhide of top quality
 BACK MATERIAL Polyester
 LINING MATERIAL Dyneema®
 FASTENING Velcro®
 COLOUR Yellow high-viz, white
 SIZE RANGE 8, 9, 10, 11
 LENGTH RANGE 230-265 mm
 PAIRS PER PACKAGE/CARTON 1/60

DISPLAY Hangtag with euro slot
 FEATURES Saw protection in the right and left glove, high-viz colour, reinforced index finger, reinforced fingertips, pre-curved fingers
 PROPERTIES Highest level of protection, good fingertip sensitivity, flexible, very durable, good grip
 PRIMARY ENVIRONMENTS OF USE Harsh environments



Cat. II

EN 388
3122EN 381
Class 1 20M/S

TEGERA®

ANTI-VIBRATION GLOVES

TEGERA® 9180

Anti-vibration glove, unlined, Microthan®, Vibrothan®, polyester, Cat. II, reinforced index finger, reinforced fingertips, chrome free, for heavy work

PALM MATERIAL Microthan®, Vibrothan®
 BACK MATERIAL Polyester
 LINING Unlined
 FASTENING Velcro®
 COLOUR Black, grey, yellow
 SIZE RANGE 7, 8, 9, 10, 11, 12
 LENGTH RANGE 210-242 mm
 PAIRS PER PACKAGE/CARTON 6/60
 DISPLAY Hook with hangtag

FEATURES Vibration-reducing according to EN ISO 10819, chrome free, reinforced index finger, reinforced seams, reinforced fingertips, padded palm, pre-curved fingers, specially designed thumb, short model, ergonomically shaped, specially designed details
 PROPERTIES Flexible, good grip, good fit, extra comfortable
 PRIMARY ENVIRONMENTS OF USE Harsh environments



Cat. II

EN 388
0222

EN ISO 10819:2013



MicroThan®

VIBROTHAN®

TEGERA®

TEGERA® 9181

Anti-vibration glove, unlined, full grain goatskin of top quality, Vibrothan®, Cat. II, reinforced index finger, reinforced seams, for heavy work

PALM MATERIAL Full grain goatskin of top quality, Vibrothan®

BACK MATERIAL Full grain goatskin of top quality

LINING Unlined

FASTENING Velcro®

COLOUR Black, yellow

SIZE RANGE 9, 10, 11

LENGTH RANGE 240-260 mm

PIECES PER PACKAGE/CARTON 1/36

DISPLAY No thread

FEATURES Vibration-reducing according to EN ISO 10819, reinforced index finger, padded palm, pre-curved fingers, short model

PROPERTIES Very durable, comfortable

PRIMARY ENVIRONMENTS OF USE Harsh environments



Cat. II



EN 388
3211

EN ISO 10819:2013



VIBROTHAN®

TEGERA®

TEGERA® 9182

Anti-vibration glove, full grain goatskin of top quality, Vibrothan®, Cat. II, extra long, for heavy work

PALM MATERIAL Full grain goatskin of top quality, Vibrothan®

BACK MATERIAL Full grain goatskin of top quality

COLOUR Black, yellow

SIZE RANGE 9, 10, 11

LENGTH RANGE 315-335 mm

PIECES PER PACKAGE/CARTON 1/36

DISPLAY No thread

FEATURES Vibration-reducing according to EN ISO 10819, extra long, padded palm

PROPERTIES Very durable, good fit, comfortable

PRIMARY ENVIRONMENTS OF USE Harsh environments



Cat. II



EN 388
3111

EN ISO 10819:1997



VIBROTHAN®

TEGERA®

IMPACT-REDUCING GLOVES

TEGERA® 9185

Impact-reducing glove, Microthan®, Impactothan®, polyester, Cat. II, reinforced fingertips, chrome free, for fine assembly work

PALM MATERIAL Microthan®, Impactothan®

BACK MATERIAL Polyester

FASTENING Velcro®

COLOUR Grey, black, yellow

SIZE RANGE 7, 8, 9, 10, 11

LENGTH RANGE 207-247 mm

PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Hook with hangtag

FEATURES Impact-reducing, reinforced seams, reinforced fingertips, padded palm, pre-curved fingers, specially designed thumb, detachable fingers, short model, ergonomically shaped, specially designed details

PROPERTIES Extremely good fingertip sensitivity, flexible, excellent grip, perfect fit, extra comfortable

PRIMARY ENVIRONMENTS OF USE Harsh environments



Cat. II



EN 388
0011



MicroThan®

IMPACTOTHAN®

TEGERA®

IMPACT-REDUCING GLOVES

TEGERA® DEFEND 2011

Leather glove, fully lined, 0,7-0,8 mm full grain cowhide of top quality, cotton, KEVLAR® fiber, Cat. II, knuckle protection, reinforced seams, for allround work

PALM MATERIAL Full grain cowhide of top quality
BACK MATERIAL Cotton
LINING Fully lined
LINING MATERIAL KEVLAR® fiber
FASTENING Velcro®
COLOUR Black
SIZE RANGE 8, 9, 10, 11
LENGTH RANGE 285-335 mm

PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Thread
FEATURES Reinforced fingers and thumb, pre-curved fingers, water repellent palm, detachable fingers, water repellent leather
PROPERTIES High level of protection, extremely good fingertip sensitivity, very durable, perfect fit
PRIMARY ENVIRONMENTS OF USE Moist environments, harsh environments



TEGERA®

WRIST SUPPORTING GLOVES

TEGERA® 9195

Synthetic leather glove, unlined, 0,5 mm Microthan®, nylon, Cat. II, wrist support, chrome free, for fine assembly work

PALM MATERIAL Microthan®
BACK MATERIAL Nylon
LINING Unlined
FASTENING Velcro®
COLOUR Black, grey, yellow
SIZE RANGE 5, 6, 7, 8, 9, 10, 11
LENGTH RANGE 220-265 mm
PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Hook with hangtag

FEATURES Wrist-supporting, extra long, chrome free, reinforced index finger, reinforced seams, pre-curved fingers, specially designed thumb, ergonomically shaped, reflector, specially designed details, elastic
PROPERTIES Extremely good fingertip sensitivity, extra flexible, durable, excellent grip, perfect fit, extra comfortable, breathable
PRIMARY ENVIRONMENTS OF USE Dark environments, dry environments, dirty environments



MicroThan®




TEGERA®

TEGERA® 9190

Synthetic leather glove, winter-lined, 0,7 mm Microthan®+, diamond grip pattern, polyester, fleece, Cat. II, wrist support, chrome free, for allround work

PALM MATERIAL Microthan®+
BACK MATERIAL Polyester
LINING Winter-lined
LINING MATERIAL Fleece
GRIP PATTERN Diamond grip pattern
FASTENING Velcro®
COLOUR Black, grey, yellow
SIZE RANGE 8, 9, 10, 11
LENGTH RANGE 255-280 mm
PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Hook with hangtag

FEATURES Wrist-supporting, extra long, chrome free, reinforced index finger, reinforced seams, reinforced fingertips, pre-curved fingers, specially designed thumb, water repellent, moisture resistant, ergonomically shaped, reflector, specially designed details
PROPERTIES Flexible, excellent grip, perfect fit, extra comfortable
PRIMARY ENVIRONMENTS OF USE Dark environments, slippery environments, dry environments, cold environments, moist environments, dirty environments



MicroThan®



TEGERA®

TEGERA® 9196

Synthetic leather glove, unlined, 0,7 mm Microthan®+, diamond grip pattern, polyester, Cat. II, wrist support, chrome free, for assembly work

PALM MATERIAL Microthan®+
BACK MATERIAL Polyester
THICKNESS 0,7 mm
LINING Unlined
GRIP PATTERN Diamond grip pattern
FASTENING Velcro®
COLOUR Grey, black, yellow
SIZE RANGE 6, 7, 8, 9, 10, 11
LENGTH RANGE 230-265 mm
PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Hook with hangtag

FEATURES Wrist-supporting, extra long, chrome free, reinforced index finger, reinforced seams, reinforced fingertips, pre-curved fingers, specially designed thumb, ergonomically shaped, specially designed details
PROPERTIES Good fingertip sensitivity, flexible, very durable, excellent grip, perfect fit, extra comfortable
PRIMARY ENVIRONMENTS OF USE Slippery environments, dry environments, moist environments, oil and greasy environments, dirty environments



MicroThan®+ ■ TEGERA®



TEGERA® 9295

Synthetic leather glove, unlined, 0,8 mm Macrothan®, polyester, Cat. II, wrist support, chrome free, for allround work

PALM MATERIAL Macrothan®
BACK MATERIAL Polyester
LINING Unlined
FASTENING Velcro®
COLOUR Black, grey, yellow
SIZE RANGE 8, 9, 10, 11
LENGTH RANGE 236-277 mm
PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Hook with hangtag

FEATURES Wrist-supporting, extra long, chrome free, reinforced index finger, reinforced palm, reinforced seams, reinforced fingertips, reinforced fingers and thumb, padded palm, pre-curved fingers, specially designed thumb, knuckle protection, ergonomically shaped, reflector, soft, specially designed details
PROPERTIES Durable, perfect fit, extra comfortable
PRIMARY ENVIRONMENTS OF USE Dry environments, dirty environments



MacroThan® ■ TEGERA®



PAINTING GLOVES

TEGERA® 977

Painting glove, nylon, polyurethane, Cat. II, for allround work

PALM MATERIAL Nylon, polyurethane
SIZE RANGE 8, 9, 10
LENGTH RANGE 320 - 360mm

PAIRS PER PACKAGE/CARTON 12/120
DISPLAY Bag
PROPERTIES Flexible



■ TEGERA®





ESD GLOVES

Human beings are excellent conductors of electricity. ESD gloves are used to divert the static electricity that we generate. Static discharge can entail a serious risk of accident, for example when handling easily combustible liquids and explosive gases. Sensitive industrial electronic equipment can be damaged or destroyed if it is installed without ESD protection. Our comfortable and supple ESD gloves are available in both rubber and textile material, with integrated or woven-in carbon fibre threads.

LIGHT WEIGHT

For precision and assembly work, your fingers need freedom of movement.
The gloves must be very supple, flexible and ergonomically sound.

ESD GLOVES / LIGHT WEIGHT

TEGERA® 9101

Synthetic leather glove, unlined, 0,5 mm Microthan®, polyester, Cat. II, reinforced index finger, chrome free, for fine assembly work

PALM MATERIAL Microthan®
BACK MATERIAL Polyester
LINING Unlined
FASTENING Elasticated 180°
COLOUR Black, yellow, white
SIZE RANGE 5, 6, 7, 8, 9, 10
LENGTH RANGE 216-253 mm
PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Thread

FEATURES Chrome free, reinforced index finger, reinforced seams, pre-curved fingers, specially designed thumb, short model, ESD, ergonomically shaped, specially designed details, conforms with IEC 61340-5-1 (ESD)
PROPERTIES Extremely good fingertip sensitivity, extra flexible, excellent grip, perfect fit, extra comfortable
PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments, moist environments, oil and greasy environments, dirty environments



MicroThan® **TEGERA®**



TEGERA® 30

Leather glove, unlined, 0,6-0,7 mm full grain goatskin of top quality, nylon, Cat. II, reinforced index finger, for precision work

PALM MATERIAL Full grain goatskin of top quality
BACK MATERIAL Nylon
LINING Unlined
FASTENING Elasticated 180°
COLOUR Blue, white
SIZE RANGE 5, 6, 7, 8, 9, 10, 11, 12
LENGTH RANGE 220-260 mm

PAIRS PER PACKAGE/CARTON 12/120
DISPLAY Thread
FEATURES Reinforced index finger, ESD, conforms with IEC 61340-5-1 (ESD)
PROPERTIES High level of protection, extremely good fingertip sensitivity, durable, perfect fit
PRIMARY ENVIRONMENTS OF USE Indoors, clean environments



TEGERA®



TEGERA® 811

Synthetic glove, PU, palm-dipped, nylon, carbon, 15 gg, smooth finish, Cat. II, for precision work

LINER MATERIAL Nylon, carbon, 15 gg
 DIPPING Palm-dipped
 DIPPING MATERIAL PU
 GRIP PATTERN Smooth finish
 COLOUR Grey, white
 SIZE RANGE 6, 7, 8, 9, 10
 LENGTH RANGE 220 - 250mm
 PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag with euro slot
 FEATURES ESD, conforms with IEC 61340-5-1 (ESD)
 PROPERTIES Good fingertip sensitivity, flexible, durable, good grip, good fit, comfortable, breathable, light
 PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments, dirty environments



Cat. II

EN 388
4131IEC 61340-5-1
R: $3.2 \times 10^6 \Omega$ - $5.9 \times 10^6 \Omega$ 
 **TEGERA®**
TEGERA® 810

Synthetic glove, PU, fingertip dipped, nylon, carbon, 15 gg, smooth finish, Cat. II, breathable, for precision work

LINER MATERIAL Nylon, carbon, 15 gg
 DIPPING Fingertip dipped
 DIPPING MATERIAL PU
 GRIP PATTERN Smooth finish
 COLOUR Grey
 SIZE RANGE 5, 6, 7, 8, 9, 10, 11
 LENGTH RANGE 220 - 250mm
 PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag with euro slot
 FEATURES ESD, conforms with IEC 61340-5-1 (ESD)
 PROPERTIES Good fingertip sensitivity, flexible, durable, good grip, good fit, comfortable, breathable, light
 PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments



Cat. II

EN 388
113XIEC 61340-5-1
R: $5.0 \times 10^5 \Omega$ - $7.4 \times 10^6 \Omega$ 
 **TEGERA®**
TEGERA® 805

Synthetic glove, nylon, carbon, 15 gg, Cat. II, for precision work

LINER MATERIAL Nylon, carbon, 15 gg
 COLOUR Grey
 SIZE RANGE 6, 7, 8, 9, 10, 11
 LENGTH RANGE 220 - 250mm
 PAIRS PER PACKAGE/CARTON 12/120
 DISPLAY Bag with euro slot

FEATURES ESD, conforms with IEC 61340-5-1 (ESD)
 PROPERTIES Good fingertip sensitivity, flexible, good fit, comfortable, breathable, light
 PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments



Cat. II

EN 388
113XIEC 61340-5-1
R: $5.0 \times 10^5 \Omega$ - $7.4 \times 10^6 \Omega$ 
 **TEGERA®**

The background image is a monochromatic, high-contrast photograph with a yellowish-gold tint. It depicts a worker in the background, slightly out of focus, wearing safety glasses and a hard hat. In the foreground, a hand wearing a dark, textured cut-resistant glove is prominently shown, holding a large, sharp, and jagged piece of metal. The metal piece has multiple sharp edges and points, resembling a large, broken fragment of a blade or a piece of scrap metal. The overall composition emphasizes the strength and protective capabilities of the gloves.

CUT RESISTANT GLOVES

We mainly use three materials for our effective cut-resistant models: KEVLAR® fibre, Dyneema® and CRF®. We combine these incredibly tough fibres with synthetic materials such as nylon and Lycra® so that the gloves not only give protection against cuts but also provide flexibility, a good grip and fingertip sensitivity. Cut-resistant gloves are graded on a scale of 3-5, where 5 denotes the highest level of protection.

Avoid cuts

Arriving at a solution whereby gloves are a close fit while at the same time protecting the hands against sharp metal edges and knife blades has always been a challenge. Over the years, such gloves have been refined and improved, and new materials have been developed. We have devoted many years to developing and refining materials that provide good protection against cuts while at the same time ensuring that the gloves are flexible and comfortable to wear. We have adapted our approach to meet the requirements of modern industry as regards production capacity, and we are constantly striving to achieve the best possible results in terms of fine motor ability and grip.

Cut-resistant gloves are graded on a scale of 3-5, where 5 denotes the highest level of protection. In recent years, we have made strenuous efforts to develop new cut-resistant materials and as a result have come up with solutions that perform even better than protection level 5.

WE ONLY USE THE BEST CUT-RESISTANT FIBRES ON THE MARKET

DYNEEMA®

Enables the production of thin, flexible and tough gloves with extremely good cut protection.

DYNEEMA® DIAMOND TECHNOLOGY – THE NEW GENERATION OF CUT RESISTANT FIBRES

Perfect in tough environments where the release of any glove fibres at all is strictly prohibited, such as the vehicle industry.

KEVLAR® FIBER (COMBINES HEAT RESISTANCE AND CUT PROTECTION)

KEVLAR® fiber is a cut-resistant fibre that we use in several different gloves. The material is heat-resistant, and can be exposed to high temperatures for long periods without suffering damage.

CRF®

Our CRF (Cut Resistant Fiber) technology is designed to provide exceptional dexterity, which is unusual in high-performance cut protection gloves.



CUT RESISTANT GLOVES – FEATURES AND BENEFITS

We work with specially developed hand moulds to ensure consistency in fit, quality and ergonomic features. We also control the mixture of materials to suit different work applications and maximise features such as dexterity, grip, durability and comfort.

LINER MATERIALS

- **DYNEEMA®** Enables the production of thin, flexible and tough gloves with extremely good cut protection.
- **DYNEEMA® DIAMOND TECHNOLOGY** – the new generation of cut resistant fibres, perfect in tough environments where the release of any glove fibres at all is strictly prohibited, such as the vehicle industry.
- **KEVLAR® fiber** (combines heat resistance and cut protection) is a cut-resistant fibre that we use in several different gloves. The material is heat-resistant, and can be exposed to high temperatures for long periods without suffering damage.
- **CRF®** Our CRF (Cut Resistant Fiber) technology is designed to provide exceptional dexterity, which is unusual in high-performance cut protection gloves.

DIPPING MATERIALS

- **Polyurethane (PU)** provides excellent grip in both wet and dry environments. It is less effective against moisture penetration.
- **Nitrile (NBR)** is highly resistant to cuts, provides acceptable grip and is effective against moisture penetration.
- **Nitrile foam** is flexible and provides good grip. It is also effective against moisture penetration.
- **Latex/natural rubber (NR)** is highly elastic and provides good grip but is sensitive to UV light.
- **Polyvinyl chloride (PVC/VINYL)** is suitable for heavy and wet work.

More detailed information on dipping materials can be found in the chapter "Protect your hands" and the pages "Understanding materials".

CUT RESISTANT GLOVES

TEGERA® 909

Cut resistant glove, PU, palm-dipped, Dyneema® Diamond Technology, Lycra®, nylon, 18 gg, smooth finish, cut resistance level 3, Cat. II, oil and grease resistant palm, for precision work

LINER MATERIAL Dyneema® Diamond Technology, Lycra®, nylon, 18 gg
DIPPING Palm-dipped
DIPPING MATERIAL PU
GRIP PATTERN Smooth finish
COLOUR Grey
SIZE RANGE 6, 7, 8, 9, 10, 11
LENGTH RANGE 210 - 250 mm
PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag with euro slot
FEATURES Cut resistant according to EN 388 level 3 (5), water and oil repellent palm, ergonomically shaped, steel-fibre free, fibreglass-free
PROPERTIES High level of protection, extremely good fingertip sensitivity, extra flexible, very durable, good grip, perfect fit, comfortable, breathable, light
PRIMARY ENVIRONMENTS OF USE Cut risk environments, dirty environments



Cat. II



EN 388
3332



TEGERA®

TEGERA® 990

Cut resistant glove, PU, palm-dipped, Dyneema®, Lycra®, 13 gg, smooth finish, cut resistance level 3, Cat. II, for precision work

LINER MATERIAL Dyneema®, Lycra®, 13 gg
DIPPING Palm-dipped
DIPPING MATERIAL PU
GRIP PATTERN Smooth finish
COLOUR White
SIZE RANGE 6, 7, 8, 9, 10, 11
LENGTH RANGE 210 - 250mm
PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag
FEATURES Cut resistant according to EN 388 level 3 (5), water and oil repellent palm, fibreglass free, soft, elastic, washable in 40° C, fibreglass-free
PROPERTIES Extremely good fingertip sensitivity, durable, good grip, perfect fit, extra comfortable, breathable, light
PRIMARY ENVIRONMENTS OF USE Cut risk environments



Cat. II



EN 388
4342



TEGERA®

TEGERA® 10990

Cut resistant glove, PU, palm-dipped, Dyneema®, Lycra®, nylon, 13 gg, smooth finish, cut resistance level 3, Cat. II, breathable back, oil and grease resistant palm, for precision work

LINER MATERIAL Dyneema®, Lycra®, nylon, 13 gg
 DIPPING Palm-dipped
 DIPPING MATERIAL PU
 GRIP PATTERN Smooth finish
 COLOUR Grey, white
 SIZE RANGE 7, 8, 9, 10, 11
 LENGTH RANGE 240-280 mm
 PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag
 FEATURES Cut resistant according to EN 388 level 3 (5), breathable back, oil and grease resistant palm
 PROPERTIES High level of protection, extremely good fingertip sensitivity, extra flexible, durable, good grip, perfect fit, extra comfortable, very breathable, light
 PRIMARY ENVIRONMENTS OF USE Cut risk environments, oil and greasy environments, dirty environments



TEGERA®

TEGERA® 899

Cut resistant glove, PU, palm-dipped, Dyneema®, nylon, 13 gg, smooth finish, cut resistance level 3, Cat. II, breathable back, water and oil repellent palm, anatomically designed, for precision work

LINER MATERIAL Dyneema®, nylon, 13 gg
 DIPPING Palm-dipped
 DIPPING MATERIAL PU
 GRIP PATTERN Smooth finish
 COLOUR Grey
 SIZE RANGE 6, 7, 8, 9, 10, 11, 12
 LENGTH RANGE 220 - 270mm
 PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag with euro slot
 FEATURES Cut resistant according to EN 388 level 3 (5)
 PROPERTIES High level of protection, good fingertip sensitivity, flexible, durable, good grip, good fit, comfortable, breathable, light
 PRIMARY ENVIRONMENTS OF USE Oil and greasy environments, dirty environments, harsh environments



TEGERA®

TEGERA® 430

Cut resistant glove, PU, palm-dipped, CRF® Technology, Lycra®, nylon, 13 gg, smooth finish, cut resistance level 3, Cat. II, breathable back, water and oil repellent palm, for fine assembly work

LINER MATERIAL CRF® Technology, Lycra®, nylon, 13 gg
 DIPPING Palm-dipped
 DIPPING MATERIAL PU
 GRIP PATTERN Smooth finish
 COLOUR Grey, white
 SIZE RANGE 6, 7, 8, 9, 10, 11

LENGTH RANGE 220 - 270mm
 PAIRS PER PACKAGE/CARTON 12/120
 DISPLAY Bag with euro slot
 FEATURES Cut resistant according to EN 388 level 3 (5)
 PROPERTIES Flexible, good grip, comfortable
 PRIMARY ENVIRONMENTS OF USE Cut risk environments, dirty environments



TEGERA®

TEGERA® 10991

Cut resistant glove, Dyneema®, Lycra®, 13 gg, cut resistance level 3, Cat. II, extra long, breathable, for precision work

LINER MATERIAL Dyneema®, Lycra®, 13 gg
 COLOUR White
 SIZE RANGE 7, 8, 9, 10, 11
 LENGTH RANGE 240-280 mm
 PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag
 PROPERTIES Extremely good fingertip sensitivity, extra flexible, durable, perfect fit, extra comfortable, very breathable, light
 PRIMARY ENVIRONMENTS OF USE Cut risk environments



TEGERA®

TEGERA® 255

Cut resistant glove, fully lined, 0,6-0,7 mm full grain goatskin of top quality, cut resistance level 3, KEVLAR® fiber, Cat. II, reinforced seams, fibreglass-free, for assembly work

PALM MATERIAL Full grain goatskin of top quality
 LINING Fully lined
 LINING MATERIAL KEVLAR® fiber
 FASTENING Elasticated 180°
 COLOUR White
 SIZE RANGE 8, 9, 10, 11, 12
 LENGTH RANGE 225-255 mm
 PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Thread
 FEATURES Cut resistant according to EN 388 level 3 (5), reinforced seams, KEVLAR® thread in the seams which resists 427° C short-term heat exposure (max operating limit) and 204° C longer-term heat exposure (constant operating limit), heat-resistant
 PROPERTIES Perfect fit
 PRIMARY ENVIRONMENTS OF USE Harsh environments



TEGERA®

TEGERA® 215

Cut resistant glove, fully lined, 0,6-0,7 mm full grain goatskin of top quality, cut resistance level 3, KEVLAR® fiber, Cat. II, reinforced index finger, reinforced fingertips, for precision work

PALM MATERIAL Full grain goatskin of top quality
 LINING Fully lined
 LINING MATERIAL KEVLAR® fiber
 FASTENING Elasticated 180°
 COLOUR Grey, white
 SIZE RANGE 7, 8, 9, 10, 11, 12
 LENGTH RANGE 210-260 mm

PAIRS PER PACKAGE/CARTON 12/120
 DISPLAY Thread
 FEATURES Cut resistant according to EN 388 level 3 (5), reinforced index finger, reinforced fingertips
 PROPERTIES High level of protection, extremely good fingertip sensitivity, durable, perfect fit
 PRIMARY ENVIRONMENTS OF USE Harsh environments



TEGERA®

TEGERA® 9121

Cut resistant glove, half-lined, 0,5 mm Microthan®+, diamond grip pattern, polyester, cut resistance level 3, KEVLAR® fiber, Cat. II, reinforced seams, chrome free

PALM MATERIAL Microthan®+
 BACK MATERIAL Polyester
 LINING Half-lined
 LINING MATERIAL KEVLAR® fiber
 GRIP PATTERN Diamond grip pattern
 FASTENING Velcro®
 COLOUR Black, grey, yellow
 SIZE RANGE 6, 7, 8, 9, 10, 11
 LENGTH RANGE 207-243 mm
 PAIRS PER PACKAGE/CARTON 6/60
 DISPLAY Hook with hangtag

FEATURES Cut resistant according to EN 388 level 3 (5), chrome free, reinforced index finger, reinforced seams, reinforced fingertips, pre-curved fingers, specially designed thumb, short model, ergonomically shaped, reflector, specially designed details
 PROPERTIES Good fingertip sensitivity, flexible, durable, excellent grip, perfect fit, extra comfortable
 PRIMARY ENVIRONMENTS OF USE Cut risk environments, dark environments, slippery environments, dry environments, moist environments, oil and greasy environments, dirty environments



MicroThan®



TEGERA®

TEGERA® 983

Cut resistant glove, PU, palm-dipped, Dyneema® Diamond Technology, Lycra®, 15 gg, smooth finish, cut resistance level 4, Cat. II, breathable back, for precision work

LINER MATERIAL Dyneema® Diamond Technology, Lycra®, 15 gg
 DIPPING Palm-dipped
 DIPPING MATERIAL PU
 GRIP PATTERN Smooth finish
 COLOUR Yellow high-viz, white
 SIZE RANGE 7, 8, 9, 10, 11
 LENGTH RANGE 220 - 270mm
 PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag
 FEATURES Cut resistant according to EN 388 level 4 (5)
 PROPERTIES Extremely good fingertip sensitivity, extra flexible, durable, good grip, perfect fit, extra comfortable, very breathable, extremely Light
 PRIMARY ENVIRONMENTS OF USE Cut risk environments, dirty environments



TEGERA®

TEGERA® 993

Cut resistant glove, Dyneema®, glass fibre thread, nylon, 13 gg, cut resistance level 4, Cat. II, for allround work

LINER MATERIAL Dyneema®, glass fibre thread, nylon, 13 gg
 COLOUR Grey
 SIZE RANGE 7, 8, 9, 10, 11
 LENGTH RANGE 230-270 mm
 PIECES PER PACKAGE/CARTON 24/240

PIECES PER BAG 1
 DISPLAY Bag
 FEATURES Cut resistant according to EN 388 level 4 (5)
 PROPERTIES Light
 PRIMARY ENVIRONMENTS OF USE Cut risk environments



TEGERA®

TEGERA® 132A

Welding and heat-resistant glove, fully lined, 0,8-0,9 mm full grain goatskin of top quality, full grain cowhide of top quality, cut resistance level 4, KEVLAR® fiber, Cat. II, reinforced seams, water and oil repellent, for allround work

PALM MATERIAL Full grain goatskin of top quality

BACK MATERIAL Full grain cowhide of top quality

LINING Fully lined

LINING MATERIAL KEVLAR® fiber

FASTENING Elasticated 180°

COLOUR Brown, black

SIZE RANGE 7, 8, 9, 10, 11, 12, 13

LENGTH RANGE 310-370 mm

PAIRS PER PACKAGE/CARTON 12/60

DISPLAY Thread

FEATURES Cut resistant according to EN 388 level 4 (5), withstands contact heat up to 100°C, reinforced seams, water and oil repellent

PROPERTIES High level of protection, good fingertip sensitivity, durable, good grip, perfect fit

PRIMARY ENVIRONMENTS OF USE Warm environments, moist environments, oil and greasy environments, dirty environments, harsh environments



Cat. II



EN 388
3432



EN 407
41324X

EN 12477 + A1

Type A

EN 1149-2
R:0.130x10°Ω



TEGERA®

TEGERA® 455

Cut resistant glove, PU, palm-dipped, CRF® Technology, glass fibre thread, nylon, 13 gg, smooth finish, cut resistance level 5, Cat. II, breathable back, water and oil repellent palm, density against dirt, for fine assembly work

LINER MATERIAL CRF® Technology, glass fibre thread, nylon, 13 gg

DIPPING Palm-dipped

DIPPING MATERIAL PU

GRIP PATTERN Smooth finish

COLOUR Black

SIZE RANGE 6, 7, 8, 9, 10, 11

LENGTH RANGE 220 - 270mm

PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Bag with euro slot

FEATURES Cut resistant according to EN 388 level 5 (5), breathable back, pre-curved fingers, water and oil repellent palm, density against dirt

PROPERTIES Highest level of protection, good fingertip sensitivity, extra flexible, very durable, good grip, perfect fit, extra comfortable, breathable, light

PRIMARY ENVIRONMENTS OF USE Cut risk environments, oil and greasy environments, dirty environments, harsh environments



Cat. II



EN 388
4543



CRF®

TEGERA®

TEGERA® 991

Cut resistant glove, PU, palm-dipped, Dyneema®, glass fibre thread, nylon, 13 gg, smooth finish, cut resistance level 5, Cat. II, water and oil repellent palm, for precision work

LINER MATERIAL Dyneema®, glass fibre thread, nylon, 13 gg

DIPPING Palm-dipped

DIPPING MATERIAL PU

GRIP PATTERN Smooth finish

COLOUR Grey

SIZE RANGE 6, 7, 8, 9, 10, 11

LENGTH RANGE 230 - 260mm

PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag

FEATURES Cut resistant according to EN 388 level 5 (5)

PROPERTIES Good fingertip sensitivity, very durable, good grip, good fit, comfortable, breathable, light

PRIMARY ENVIRONMENTS OF USE Cut risk environments, oil and greasy environments, dirty environments, harsh environments



Cat. II



EN 388
4544



TEGERA®

TEGERA® 991WHT

Cut resistant glove, PU, palm-dipped, Dyneema®, glass fibre thread, nylon, 13 gg, smooth finish, cut resistance level 5, Cat. II, water and oil repellent palm, for precision work

LINER MATERIAL Dyneema®, glass fibre thread, nylon, 13 gg
 DIPPING Palm-dipped
 DIPPING MATERIAL PU
 GRIP PATTERN Smooth finish
 COLOUR White
 SIZE RANGE 7, 8, 9, 10, 11
 LENGTH RANGE 230 - 260 mm
 PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag with euro slot
 FEATURES Cut resistant according to EN 388 level 5 (5)
 PROPERTIES Highest level of protection, good fingertip sensitivity, durable, good grip, good fit, breathable, light
 PRIMARY ENVIRONMENTS OF USE Cut risk environments, oil and greasy environments, dirty environments



TEGERA®

TEGERA® 980

Cut resistant glove, waterbased PU, PU, fingertip dipped, palm-dipped, Dyneema® Diamond Technology, Lycra®, nylon, 13 gg, smooth finish, cut resistance level 5, Cat. II, extra long, reinforced fingertips, for fine assembly work

LINER MATERIAL Dyneema® Diamond Technology, Lycra®, nylon, 13 gg
 DIPPING Fingertip dipped, palm-dipped
 DIPPING MATERIAL Waterbased PU, PU
 GRIP PATTERN Smooth finish
 COLOUR Black, grey, blue
 SIZE RANGE 7, 8, 9, 10, 11
 LENGTH RANGE 230 - 270 mm
 PAIRS PER PACKAGE/CARTON 12/120
 DISPLAY Bag with euro slot

FEATURES Cut resistant according to EN 388 level 5 (5), extra long, breathable back, reinforced fingertips, pre-curved fingers, water and oil repellent palm, anatomically designed, steel-fibre free, fibreglass-free
 PROPERTIES High level of protection, very durable, very breathable, light
 PRIMARY ENVIRONMENTS OF USE Cut risk environments, slippery environments, oil and greasy environments, dirty environments, harsh environments



TEGERA®

TEGERA® 981

Cut resistant glove, waterbased PU, PU, fingertip dipped, palm-dipped, Dyneema® Diamond Technology, Lycra®, nylon, 13 gg, smooth finish, cut resistance level 5, Cat. II, extra long, reinforced fingertips, anatomically designed, for fine assembly work

LINER MATERIAL Dyneema® Diamond Technology, Lycra®, nylon, 13 gg
 DIPPING Fingertip dipped, palm-dipped
 DIPPING MATERIAL Waterbased PU, PU
 GRIP PATTERN Smooth finish
 COLOUR White, grey
 SIZE RANGE 7, 8, 9, 10, 11
 LENGTH RANGE 220 - 270 mm
 PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag with euro slot
 FEATURES Cut resistant according to EN 388 level 5 (5), extra long, breathable back, reinforced fingertips, water and oil repellent palm
 PROPERTIES High level of protection, durable, good grip, breathable
 PRIMARY ENVIRONMENTS OF USE Cut risk environments, slippery environments, moist environments, oil and greasy environments, dirty environments, harsh environments




TEGERA®

TEGERA® 666

Cut resistant glove, nitrile foam, palm-dipped, KEVLAR® fiber, glass fibre thread, 13 gg, foam grip pattern, cut resistance level 5, Cat. II, withstands contact heat up to 100°C, water and oil repellent palm, for fine assembly work

LINER MATERIAL KEVLAR® fiber, glass fibre thread, 13 gg
 DIPPING Palm-dipped
 DIPPING MATERIAL Nitrile foam
 GRIP PATTERN Foam grip pattern
 COLOUR Black, green
 SIZE RANGE 7, 8, 9, 10, 11
 LENGTH RANGE 220 - 260mm
 PAIRS PER PACKAGE/CARTON 12/120
 DISPLAY Bag with euro slot

FEATURES Cut resistant according to EN 388 level 5 (5), withstands contact heat up to 100°C, breathable back, water and oil repellent palm, ESD, conforms with IEC 61340-5-1 (ESD)
 PROPERTIES Highest level of protection, good fingertip sensitivity, flexible, very durable, good grip, good fit, comfortable, breathable, light
 PRIMARY ENVIRONMENTS OF USE Cut risk environments, slippery environments, warm environments, moist environments, oil and greasy environments, dirty environments

**TEGERA® 450**

Cut resistant glove, nitrile foam, palm-dipped, CRF® Technology, glass fibre thread, nylon, 13 gg, foam grip pattern, cut resistance level 5, Cat. II, water and oil repellent palm, for fine assembly work

LINER MATERIAL CRF® Technology, glass fibre thread, nylon, 13 gg
 DIPPING Palm-dipped
 DIPPING MATERIAL Nitrile foam
 GRIP PATTERN Foam grip pattern
 COLOUR Black
 SIZE RANGE 6, 7, 8, 9, 10, 11
 LENGTH RANGE 220 - 270mm

PAIRS PER PACKAGE/CARTON 12/120
 DISPLAY Bag with euro slot
 FEATURES Cut resistant according to EN 388 level 5 (5)
 PROPERTIES Durable, good grip
 PRIMARY ENVIRONMENTS OF USE Cut risk environments, dirty environments, harsh environments

**TEGERA® 2809**

Cut resistant glove, nitrile, fully dipped, Dyneema®, glass fibre thread, nylon, 13 gg, structured, cut resistance level 5, Cat. II, water and oil repellent, for allround work

LINER MATERIAL Dyneema®, glass fibre thread, nylon, 13 gg
 DIPPING Fully dipped
 DIPPING MATERIAL Nitrile
 GRIP PATTERN Structured
 COLOUR Black
 SIZE RANGE 7, 8, 9, 10, 11
 LENGTH RANGE 230 - 290mm

PAIRS PER PACKAGE/CARTON 12/120
 FEATURES Cut resistant according to EN 388 level 5 (5), water and oil repellent, anatomically designed
 PROPERTIES High level of protection, durable
 PRIMARY ENVIRONMENTS OF USE Cut risk environments, slippery environments, moist environments, oil and greasy environments, dirty environments



TEGERA® 629

Cut resistant glove, latex, 3/4 dipped, Dyneema®, glass fibre thread, nylon, 13 gg, granulated, cut resistance level 5, Cat. II, waterproof, for assembly work

LINER MATERIAL Dyneema®, glass fibre thread, nylon, 13 gg
 DIPPING 3/4 dipped
 DIPPING MATERIAL Latex
 GRIP PATTERN Granulated
 FASTENING Velcro®
 COLOUR Black, grey
 SIZE RANGE 7, 8, 9, 10, 11
 LENGTH RANGE 220 - 260mm
 PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag with euro slot
 FEATURES Cut resistant according to EN 388 level 5 (5), water and oil repellent palm and knuckle
 PROPERTIES High level of protection, good fingertip sensitivity, flexible, durable, good grip, good fit, comfortable, light
 PRIMARY ENVIRONMENTS OF USE Cut risk environments, slippery environments, wet environments, moist environments, dirty environments



Cat. II

EN 388
3542**TEGERA®****TEGERA® 992**

Cut resistant glove, Dyneema®, Lycra®, nylon, 13 gg, cut resistance level 5, Cat. II, for precision work

LINER MATERIAL Dyneema®, Lycra®, nylon, 13 gg
 COLOUR White
 SIZE RANGE 6, 7, 8, 9, 10
 LENGTH RANGE 220-260 mm
 PIECES PER PACKAGE/CARTON 10/120
 PIECES PER BAG 1

DISPLAY Bag
 FEATURES Cut resistant according to EN 388 level 5 (5)
 PROPERTIES High level of protection, good fingertip sensitivity, durable, good fit, comfortable, breathable, light
 PRIMARY ENVIRONMENTS OF USE Cut risk environments, harsh environments



Cat. II

EN 388
1542**TEGERA®****TEGERA® 910**

Cut resistant glove, CRF® Technology, nylon, 13 gg, cut resistance level 5, Cat. II, high-viz colour, for allround work

LINER MATERIAL CRF® Technology, nylon, 13 gg
 COLOUR Orange high-viz
 SIZE RANGE 6, 7, 8, 9, 10, 11
 LENGTH RANGE 220-270 mm
 PAIRS PER PACKAGE/CARTON 12/120
 FEATURES Cut resistant according to EN 388 level 5 (5), high-viz colour, soft, thin

PROPERTIES Highest level of protection, good fingertip sensitivity, flexible, durable, good fit, comfortable, light
 PRIMARY ENVIRONMENTS OF USE Cut risk environments, dry environments, clean environments, cold environments, warm environments, dirty environments



Cat. II

EN 388
354X**CRF®****TEGERA®**

CUT RESISTANT GLOVES

TEGERA® 950

Cut resistant glove, fully lined, 0,7-0,8 mm full grain deerskin, cut resistance level 5, Dyneema®, stainless steel fibre yarn, Cat. II, for allround work

PALM MATERIAL Full grain deerskin

BACK MATERIAL Full grain deerskin

LINING Fully lined

LINING MATERIAL Dyneema®, stainless steel fibre yarn

FASTENING Elasticated 180°

COLOUR Black

SIZE RANGE 6, 7, 8, 9, 10, 11, 12

LENGTH RANGE 240-285 mm

PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Thread

FEATURES Cut resistant according to EN 388 level 5 (5)

PROPERTIES Highest level of protection, good fingertip sensitivity, durable, good fit

PRIMARY ENVIRONMENTS OF USE Cut risk environments, harsh environments



Cat. II



EN 388
3523



TEGERA®





CUT RESISTANT SLEEVES

Flexible and anatomically designed sleeves for all-round and installation work. Protects forearms against cuts, abrasion, tear and puncture injuries.

MEDIUM WEIGHT

You need hardwearing gloves in a durable material. At the same time, they must be supple and comfortable to wear.

CUT RESISTANT SLEEVES – FEATURES AND BENEFITS

We work with specially developed hand moulds to ensure consistency in fit, quality and ergonomic features. We also control the mixture of materials to suit different work applications and maximise features such as dexterity, grip, durability and comfort.

LINER MATERIALS

- **DYNEEMA®** Enables the production of thin, flexible and tough gloves with extremely good cut protection.
- **DYNEEMA® DIAMOND TECHNOLOGY** – the new generation of cut resistant fibres, perfect in tough environments where the release of any glove fibres at all is strictly prohibited, such as the vehicle industry.
- **KEVLAR® fiber** (combines heat resistance and cut protection) is a cut-resistant fibre that we use in several different gloves. The material is heat-resistant, and can be exposed to high temperatures for long periods without suffering damage.
- **CRF®** Our CRF (Cut Resistant Fiber) technology is designed to provide exceptional dexterity, which is unusual in high-performance cut protection gloves.

TEGERA® 93

Cut sleeve, CRF® Technology, Lycra®, nylon, 13 gg, cut resistance level 3, Cat. II, steel-fibre free, fibreglass-free, for assembly work

LINER MATERIAL CRF® Technology, Lycra®, nylon, 13 gg
FASTENING String lock
COLOUR Grey, white
SIZE RANGE 8, 9, 10
LENGTH RANGE 420-540 mm
PIECES PER PACKAGE/CARTON 10/100
PIECES PER BAG 1

DISPLAY Bag with euro slot
FEATURES Cut resistant according to EN 388 level 3 (5)
PROPERTIES High level of protection, flexible, durable, perfect fit, comfortable, breathable, light
PRIMARY ENVIRONMENTS OF USE Cut risk environments



Cat. II



EN 388
434X



TEGERA® 98

Cut sleeve, Dyneema®, nylon, 13 gg, cut resistance level 3, Cat. II, extra long, high-viz colour, breathable back

LINER MATERIAL Dyneema®, nylon, 13 gg
 COLOUR Green high-viz
 LENGTH RANGE 350 mm
 PIECES PER PACKAGE/CARTON 10/100
 PIECES PER BAG 1
 DISPLAY Bag

FEATURES Cut resistant according to EN 388 level 3 (5)
 PROPERTIES High level of protection, flexible, durable, good fit, comfortable, breathable, light
 PRIMARY ENVIRONMENTS OF USE Cut risk environments, harsh environments



TEGERA®

TEGERA® 95

Cut sleeve, Dyneema® Diamond Technology, Lycra®, nylon, 13 gg, cut resistance level 5, Cat. II, steel-fibre free, fibreglass-free, for assembly work

LINER MATERIAL Dyneema® Diamond Technology, Lycra®, nylon, 13 gg
 COLOUR Grey, black
 SIZE RANGE 8, 9, 10
 LENGTH RANGE 420-540 mm
 PIECES PER PACKAGE/CARTON 10/100
 PIECES PER BAG 1
 DISPLAY Bag with euro slot

FEATURES Cut resistant according to EN 388 level 5 (5), ergonomically shaped, steel-fibre free, fibreglass-free
 PROPERTIES Highest level of protection, extra flexible, very durable, good fit, extra comfortable, breathable, light
 PRIMARY ENVIRONMENTS OF USE Cut risk environments



TEGERA®



THERMAL GLOVES



Thermal risks

In this chapter you find gloves that offer protection against thermal risks – frostbite and burns. Our winter-lined gloves are supple, durable and snug. You can find waterproof winter gloves for users who work outdoors in the wet. Our range includes extra warm gloves for people who are out in all weathers – even when temperatures fall dramatically.

In the following pages you will also find gloves that resist heat and protect those doing hot work and welding – from simple, allround gloves that can withstand 200°C to advanced welding gloves with and without lining that give protection at much higher temperatures.



AVOID FROSTBITE

Bare hands should not be exposed to temperatures lower than +10°C. To protect against cold temperatures, wind and damp, lined gloves are required.



AVOID BURNS

A large burn represents one of the greatest traumas that anyone can be exposed to. Many burns heal of their own accord but large ones can cause lifelong scarring. Always use gloves when handling hot work, whether in a car shop, a catering centre or a factory.

A person wearing a dark winter jacket and a cap is shown from the chest up, looking upwards. They are holding a snow-covered branch in their gloved hands. The background is a snowy landscape with a small building in the distance. The entire image has a blue tint.

COLD INSULATION GLOVES

Our winter gloves are warm, comfortable and flexible. Both materials and manufacturing methods in this area are constantly being improved, as a result of which these gloves keep hands warm without forfeiting sensitivity. Winter gloves are available in different varieties: waterproof ones for people who work outdoors in very wet conditions and extra warm models for those who are out in all weathers – even when temperatures fall dramatically. All gloves have been very carefully designed. Different types of lining are available to suit differ-

LIGHT WEIGHT

For precision and assembly work, your fingers need freedom of movement.
The gloves must be very supple, flexible and ergonomically sound.

COLD INSULATION GLOVES / LIGHT WEIGHT

TEGERA® 322

Synthetic leather glove, winter-lined, synthetic leather, polyester, fleece, Cat. II, reinforced index finger, chrome free, for assembly work

PALM MATERIAL Synthetic leather
BACK MATERIAL Polyester
LINING Winter-lined
LINING MATERIAL Fleece
FASTENING Elasticated 180°
COLOUR Black, grey
SIZE RANGE 8, 9, 10, 11
LENGTH RANGE 230-260 mm

PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Hook with hangtag
FEATURES Chrome free, reinforced index finger, short model, soft
PROPERTIES Good fingertip sensitivity, flexible, extra comfortable
PRIMARY ENVIRONMENTS OF USE Dry environments, cold environments




TEGERA® 517

Synthetic leather glove, winter-lined, 0,7 mm synthetic leather, polyester, fleece, Cat. II, chrome free, for precision work

PALM MATERIAL Synthetic leather
BACK MATERIAL Polyester
LINING Winter-lined
LINING MATERIAL Fleece
FASTENING Velcro®
COLOUR Black, green
SIZE RANGE 8, 9, 10, 11
LENGTH RANGE 235-255 mm
PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Hook with hangtag
FEATURES Chrome free, reinforced index finger, reinforced fingertips, windproof, short model, waterproof
PROPERTIES Good fingertip sensitivity, flexible, good grip, good fit, comfortable
PRIMARY ENVIRONMENTS OF USE Windy environments, slippery environments, dry environments, cold environments, wet environments, moist environments, oil and greasy environments, dirty environments



AQUATHAN®



TEGERA® 235

Leather glove, winter-lined, 0,6-0,7 mm full grain goatskin, nylon, fleece, Cat. II, reinforced index finger, reinforced fingertips, for precision work

PALM MATERIAL Full grain goatskin
 BACK MATERIAL Nylon
 LINING Winter-lined
 LINING MATERIAL Fleece
 FASTENING Elasticated 360°
 COLOUR Black, green, white
 SIZE RANGE 7, 8, 9, 10, 11
 LENGTH RANGE 225-255 mm


PAIRS PER PACKAGE/CARTON 6/60
 DISPLAY Hook with hangtag
 FEATURES Reinforced index finger, reinforced fingertips
 PROPERTIES Good fingertip sensitivity, flexible, durable, good grip, good fit, comfortable
 PRIMARY ENVIRONMENTS OF USE All-year use, cold environments

**TEGERA® 217**

Leather glove, winter-lined, 0,6-0,7 mm full grain goatskin, spandex, fleece, Cat. II, reinforced index finger, for precision work

PALM MATERIAL Full grain goatskin
 BACK MATERIAL Spandex
 LINING Winter-lined
 LINING MATERIAL Fleece
 FASTENING Elasticated 360°
 COLOUR Blue, white
 SIZE RANGE 8, 9, 10, 11
 LENGTH RANGE 220-265 mm


PAIRS PER PACKAGE/CARTON 6/60
 DISPLAY Hook with hangtag
 FEATURES Reinforced index finger, reinforced fingertips
 PROPERTIES Good fingertip sensitivity, flexible, durable, good grip, good fit, comfortable, warm
 PRIMARY ENVIRONMENTS OF USE Outdoors, all-year use, cold environments

**TEGERA® 117**

Leather glove, winter-lined, 0,6-0,7 mm full grain goatskin of top quality, nylon, fleece, Cat. II, reinforced index finger, reinforced fingers and thumb, for precision work

PALM MATERIAL Full grain goatskin of top quality
 BACK MATERIAL Nylon
 LINING Winter-lined
 LINING MATERIAL Fleece
 FASTENING Velcro®
 COLOUR Grey, white
 SIZE RANGE 6, 7, 8, 9, 10, 11
 LENGTH RANGE 230-285 mm

PAIRS PER PACKAGE/CARTON 12/60
 DISPLAY Hook with hangtag
 FEATURES Reinforced index finger, reinforced fingers and thumb
 PROPERTIES High level of protection, extremely good fingertip sensitivity, extra flexible, durable, perfect fit, extra comfortable, warm
 PRIMARY ENVIRONMENTS OF USE Outdoors, all-year use, cold environments



TEGERA® 335

Leather glove, winter-lined, 0,6-0,7 mm full grain goatskin, nylon, fleece, Cat. II, reinforced index finger, reinforced fingers and thumb, for precision work

PALM MATERIAL Full grain goatskin

BACK MATERIAL Nylon

LINING Winter-lined

LINING MATERIAL Fleece

FASTENING Velcro®

COLOUR Black, white, green

SIZE RANGE 7, 8, 9, 10, 11

LENGTH RANGE 220-270 mm

PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Hook with hangtag

FEATURES Reinforced index finger, reinforced fingers and thumb, specially designed details

PROPERTIES High level of protection, good fingertip sensitivity, flexible, durable, good grip, good fit, comfortable, warm

PRIMARY ENVIRONMENTS OF USE Cold environments



Cat. II



EN 388
2111



EN 511
12X



TEGERA®



MEDIUM WEIGHT

You need hardwearing gloves in a durable material. At the same time, they must be supple and comfortable to wear.

COLD INSULATION GLOVES / MEDIUM WEIGHT

TEGERA® 9127

Synthetic leather glove, winter-lined, 0,7 mm Microthan®+, diamond grip pattern, polyester, fleece, Thinsulate® 40g, Cat. II, chrome free, windproof back, for allround work

PALM MATERIAL Microthan®+
BACK MATERIAL Polyester
LINING Winter-lined
LINING MATERIAL Fleece, Thinsulate® 40g
GRIP PATTERN Diamond grip pattern
FASTENING Elasticated 360°
COLOUR Grey, black, yellow
SIZE RANGE 7, 8, 9, 10, 11, 12
LENGTH RANGE 225-275 mm
PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Hook with hangtag

FEATURES Chrome free, reinforced index finger, reinforced seams, reinforced fingertips, pre-curved fingers, specially designed thumb, windproof back, short model, ergonomically shaped, specially designed details
PROPERTIES Flexible, very durable, excellent grip, perfect fit, extra comfortable
PRIMARY ENVIRONMENTS OF USE Windy environments, slippery environments, dry environments, cold environments, moist environments, oil and greasy environments, dirty environments



Cat. II



EN 388
2221



EN 511
21X



Microthan®+



Thinsulate
INSULATION

TEGERA®

TEGERA® 9128

Synthetic leather glove, winter-lined, 0,7 mm Microthan®+, diamond grip pattern, polyester, fleece, Thinsulate® 40g, Cat. II, chrome free, high-viz colour, for allround work

PALM MATERIAL Microthan®+
BACK MATERIAL Polyester
LINING Winter-lined
LINING MATERIAL Fleece, Thinsulate® 40g
GRIP PATTERN Diamond grip pattern
FASTENING Elasticated 360°
COLOUR Yellow, black
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 240-275 mm
PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Hook with hangtag

FEATURES For touch screen, chrome free, high-viz colour, reinforced index finger, reinforced seams, reinforced fingertips, pre-curved fingers, specially designed thumb, knuckle protection, windproof, waterproof, ergonomically shaped, reflector, specially designed details
PROPERTIES Flexible, durable, excellent grip, perfect fit, extra comfortable
PRIMARY ENVIRONMENTS OF USE Dark environments, windy environments, slippery environments, dry environments, cold environments, wet environments, moist environments, oil and greasy environments, dirty environments, harsh environments



Microthan®+

TOUCHSCREEN

AQUATHAN®



Cat. II



EN 388
1111



EN 511
11X



Thinsulate
INSULATION

TEGERA®

TEGERA® 9122

Synthetic leather glove, winter-lined, 0,7 mm Microthan[®]+, diamond grip pattern, polyester, fleece, Cat. II, chrome free, water repellent, for allround work

PALM MATERIAL Microthan[®]+

BACK MATERIAL Polyester

LINING Winter-lined

LINING MATERIAL Fleece

GRIP PATTERN Diamond grip pattern

FASTENING Velcro[®]

COLOUR Black, grey, yellow

SIZE RANGE 7, 8, 9, 10, 11

LENGTH RANGE 242-282 mm


PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Hook with hangtag

FEATURES Chrome free, reinforced index finger, reinforced seams, reinforced fingertips, pre-curved fingers, specially designed thumb, water repellent, ergonomically shaped, reflector, specially designed details

PROPERTIES Flexible, very durable, excellent grip, perfect fit, extra comfortable

PRIMARY ENVIRONMENTS OF USE Dark environments, slippery environments, dry environments, cold environments, moist environments, oil and greasy environments, dirty environments

MicroThan[®]+**TEGERA®****TEGERA® 9126**

Synthetic leather glove, winter-lined, 0,7 mm Microthan[®]+, diamond grip pattern, polyester, fleece, Cat. II, chrome free, waterproof, for allround work

PALM MATERIAL Microthan[®]+

BACK MATERIAL Polyester

LINING Winter-lined

LINING MATERIAL Fleece

GRIP PATTERN Diamond grip pattern

FASTENING Elasticated 360°

COLOUR Black, grey, yellow

SIZE RANGE 8, 9, 10, 11

LENGTH RANGE 260-295 mm


PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Hook with hangtag

FEATURES Chrome free, reinforced index finger, reinforced seams, reinforced fingertips, pre-curved fingers, specially designed thumb, windproof, waterproof, Sympatex membrane, ergonomically shaped, reflector, specially designed details

PROPERTIES Flexible, very durable, excellent grip, extra comfortable

PRIMARY ENVIRONMENTS OF USE Dark environments, windy environments, slippery environments, dry environments, cold environments, wet environments, moist environments, oil and greasy environments, dirty environments, harsh environments

MicroThan[®]+**TEGERA®****TEGERA® 9112**

Synthetic leather glove, winter-lined, 0,7 mm Microthan[®]+, diamond grip pattern, polyester, fleece, Cat. II, chrome free, water repellent, for allround work

PALM MATERIAL Microthan[®]+

BACK MATERIAL Polyester

LINING Winter-lined

LINING MATERIAL Fleece

GRIP PATTERN Diamond grip pattern

FASTENING Elasticated 180°

COLOUR Black, grey, yellow

SIZE RANGE 6, 7, 8, 9, 10, 11, 12, 13

LENGTH RANGE 230-275 mm

PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Hook with hangtag

FEATURES Chrome free, reinforced index finger, reinforced palm, reinforced seams, reinforced fingertips, padded palm, pre-curved fingers, specially designed thumb, water repellent, ergonomically shaped, reflector, specially designed details

PROPERTIES Flexible, very durable, excellent grip, perfect fit, extra comfortable

PRIMARY ENVIRONMENTS OF USE Dark environments, slippery environments, dry environments, clean environments, cold environments, wet environments, moist environments, oil and greasy environments, dirty environments, harsh environments

MicroThan[®]+**TEGERA®**

TEGERA® 9113

Synthetic leather glove, winter-lined, 0,7 mm Microthan®+, diamond grip pattern, polyester, fleece, Thinsulate® 100g, Cat. II, chrome free, waterproof, for allround work


PALM MATERIAL Microthan®+
 BACK MATERIAL Polyester
 LINING Winter-lined
 LINING MATERIAL Fleece, Thinsulate® 100g
 GRIP PATTERN Diamond grip pattern
 FASTENING Elasticated 360°
 COLOUR Grey, black, yellow
 SIZE RANGE 7, 8, 9, 10, 11, 12
 LENGTH RANGE 240-295 mm
 PAIRS PER PACKAGE/CARTON 6/60
 DISPLAY Hook with hangtag

FEATURES Chrome free, reinforced index finger, reinforced seams, reinforced fingertips, pre-curved fingers, specially designed thumb, windproof, waterproof, moisture resistant, ergonomically shaped, reflector, specially designed details
 PROPERTIES Very durable, excellent grip, good fit, extra comfortable
 PRIMARY ENVIRONMENTS OF USE Dark environments, windy environments, slippery environments, dry environments, clean environments, cold environments, wet environments, moist environments, oil and greasy environments, dirty environments, harsh environments



MicroThan®+

AQUATHAN®

Thinsulate
INSULATION

TEGERA®

TEGERA® 9190

Synthetic leather glove, winter-lined, 0,7 mm Microthan®+, diamond grip pattern, polyester, fleece, Cat. II, wrist support, chrome free, for allround work

PALM MATERIAL Microthan®+
 BACK MATERIAL Polyester
 LINING Winter-lined
 LINING MATERIAL Fleece
 GRIP PATTERN Diamond grip pattern
 FASTENING Velcro®
 COLOUR Black, grey, yellow
 SIZE RANGE 8, 9, 10, 11
 LENGTH RANGE 255-280 mm
 PAIRS PER PACKAGE/CARTON 6/60
 DISPLAY Hook with hangtag


FEATURES Wrist-supporting, extra long, chrome free, reinforced index finger, reinforced seams, reinforced fingertips, pre-curved fingers, specially designed thumb, water repellent, moisture resistant, ergonomically shaped, reflector, specially designed details
 PROPERTIES Flexible, excellent grip, perfect fit, extra comfortable
 PRIMARY ENVIRONMENTS OF USE Dark environments, slippery environments, dry environments, cold environments, moist environments, dirty environments



MicroThan®+



TEGERA®

**TEGERA® 9202**

Synthetic leather glove, winter-lined, 0,8 mm Macrothan®, polyester, fleece, Cat. II, reinforced fingers and thumb, chrome free, for allround work

PALM MATERIAL Macrothan®
 BACK MATERIAL Polyester
 LINING Winter-lined
 LINING MATERIAL Fleece
 FASTENING Velcro®
 COLOUR Grey, black, yellow
 SIZE RANGE 7, 8, 9, 10, 11
 LENGTH RANGE 230-270 mm
 PAIRS PER PACKAGE/CARTON 6/60


DISPLAY Hook with hangtag
 FEATURES Chrome free, reinforced index finger, reinforced fingertips, reinforced fingers and thumb, reinforced thumb, pre-curved fingers, specially designed thumb, ergonomically shaped, reflector, specially designed details
 PROPERTIES Flexible, durable, perfect fit, extra comfortable
 PRIMARY ENVIRONMENTS OF USE Dry environments, clean environments, cold environments, dirty environments



MacroThan®



TEGERA®



TEGERA® 9232

Synthetic leather glove, winter-lined, 0,8 mm Macrothan®, neoprene, fleece, Cat. II, chrome free, windproof back, for allround work

PALM MATERIAL Macrothan®
 BACK MATERIAL Neoprene
 LINING Winter-lined
 LINING MATERIAL Fleece
 FASTENING Elasticated 360°
 COLOUR Black, grey, yellow
 SIZE RANGE 7, 8, 9, 10, 11
 LENGTH RANGE 247-290 mm
 PAIRS PER PACKAGE/CARTON 6/60
 DISPLAY Hook with hangtag

FEATURES Chrome free, reinforced index finger, reinforced palm, reinforced seams, reinforced fingertips, reinforced fingers and thumb, pre-curved fingers, specially designed thumb, windproof back, ergonomically shaped, reflector, specially designed details
 PROPERTIES Flexible, durable, perfect fit, extra comfortable
 PRIMARY ENVIRONMENTS OF USE Dark environments, windy environments, dry environments, cold environments, moist environments, dirty environments



Cat. II

EN 388
2241EN 511
120

MacroThan®



TEGERA®

TEGERA® 417

Synthetic leather glove, fully lined, 0,7 mm synthetic leather, polyester, fleece, Cat. II, chrome free, soft, for allround work

PALM MATERIAL Synthetic leather
 BACK MATERIAL Polyester
 LINING Fully lined
 LINING MATERIAL Fleece
 FASTENING Elasticated 360°
 COLOUR Grey, black, blue
 SIZE RANGE 8, 9, 10, 11
 LENGTH RANGE 250-270 mm

PAIRS PER PACKAGE/CARTON 6/60
 DISPLAY Hook with hangtag
 FEATURES Chrome free, reinforced palm, soft
 PROPERTIES Good fingertip sensitivity, flexible, durable, good grip, good fit, extra comfortable
 PRIMARY ENVIRONMENTS OF USE Slippery environments, dry environments, cold environments, dirty environments



Cat. II

EN 388
1221EN 511
11X

TEGERA®

TEGERA® 293

Leather glove, winter-lined, 0,7-0,8 mm full grain goatskin, polyester, Thinsulate® 40g, Cat. II, wind and waterproof back, waterproof, for allround work

PALM MATERIAL Full grain goatskin
 BACK MATERIAL Polyester
 LINING Winter-lined
 LINING MATERIAL Thinsulate® 40g
 FASTENING Elasticated 360°
 COLOUR Green, black, white
 SIZE RANGE 8, 9, 10, 11, 12
 LENGTH RANGE 250-285 mm
 PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Hook with hangtag
 FEATURES High-viz colour, reinforced fingers and thumb, waterproof
 PROPERTIES High level of protection, extremely good fingertip sensitivity, extra flexible, durable, good grip, perfect fit, extra comfortable, warm
 PRIMARY ENVIRONMENTS OF USE Dark environments, windy environments, cold environments, wet environments



Cat. II

EN 388
2121EN 511
120

AQUATHAN®

Thinsulate
INSULATION


TEGERA®

TEGERA® 295

Leather glove, 0,7-0,8 mm full grain goatskin, spandex, Thinsulate® 40g, Cat. II, waterproof, winter-lined, for allround work

PALM MATERIAL Full grain goatskin
 BACK MATERIAL Spandex
 LINING MATERIAL Thinsulate® 40g
 FASTENING Elasticated 360°
 COLOUR White, grey, blue
 SIZE RANGE 6, 7, 8, 9, 10, 11, 12
 PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Hook with hangtag
 FEATURES Reinforced fingers and thumb, waterproof
 PROPERTIES Extremely good fingertip sensitivity, extra flexible, durable, good grip, perfect fit, extra comfortable, warm
 PRIMARY ENVIRONMENTS OF USE Cold environments, wet environments



AQUATHAN®

Thinsulate
INSULATION

TEGERA®

TEGERA® 447

Leather glove, winter-lined, 0,6-0,7 mm full grain goatskin, spandex, Thinsulate® 40g, Cat. II, reinforced index finger, waterproof, for allround work

PALM MATERIAL Full grain goatskin
 BACK MATERIAL Spandex
 LINING Winter-lined
 LINING MATERIAL Thinsulate® 40g
 FASTENING Elasticated 180°
 COLOUR Black, white
 SIZE RANGE 7, 8, 9, 10, 11
 LENGTH RANGE 230-260 mm
 PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Hook with hangtag
 FEATURES Reinforced index finger, reinforced fingertips, pre-curved fingers, waterproof, reflector
 PROPERTIES Good fingertip sensitivity, flexible, durable, good grip, perfect fit, extra comfortable, warm
 PRIMARY ENVIRONMENTS OF USE Outdoors, cold environments, wet environments



AQUATHAN®

Thinsulate
INSULATION

TEGERA®

TEGERA® 437

Leather glove, winter-lined, 0,6-0,7 mm full grain goatskin, neoprene, spandex, Thinsulate® 40g, Cat. II, reinforced index finger, waterproof, for allround work

PALM MATERIAL Full grain goatskin
 BACK MATERIAL Neoprene, spandex
 LINING Winter-lined
 LINING MATERIAL Thinsulate® 40g
 FASTENING Velcro®
 COLOUR Black, white
 SIZE RANGE 7, 8, 9, 10, 11
 LENGTH RANGE 230-265 mm

PAIRS PER PACKAGE/CARTON 6/60
 DISPLAY Hook with hangtag
 FEATURES Reinforced index finger, reinforced fingers and thumb, waterproof, reflector
 PROPERTIES Extremely good fingertip sensitivity, extra flexible, durable, perfect fit, extra comfortable, warm
 PRIMARY ENVIRONMENTS OF USE Outdoors, cold environments, wet environments



AQUATHAN®

Thinsulate
INSULATION


TEGERA®

TEGERA® 297

Leather glove, winter-lined, 0,7-0,8 mm full grain goatskin, neoprene, spandex, Thinsulate® 100g, Cat. II, reinforced fingers and thumb, waterproof, for allround work

PALM MATERIAL Full grain goatskin
 BACK MATERIAL Neoprene, spandex
 LINING Winter-lined
 LINING MATERIAL Thinsulate® 100g
 FASTENING Velcro®
 COLOUR Blue, black, white
 SIZE RANGE 8, 9, 10, 11
 PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Hook with hangtag
 FEATURES Reinforced fingers and thumb, pre-curved fingers, waterproof, moisture resistant
 PROPERTIES High level of protection, good fingertip sensitivity, extra flexible, durable, good grip, perfect fit, extra comfortable, warm
 PRIMARY ENVIRONMENTS OF USE Cold environments, wet environments, moist environments



AQUATHAN®

Thinsulate
INSULATION

TEGERA®

TEGERA® 191

Leather glove, winter-lined, 1,1 - 1,4 mm full grain cowhide of top quality, Thinsulate® 200g, Cat. II, reinforced thumb, waterproof, for allround work

PALM MATERIAL Full grain cowhide of top quality
 BACK MATERIAL Full grain cowhide of top quality
 LINING Winter-lined
 LINING MATERIAL Thinsulate® 200g
 FASTENING String lock
 COLOUR Black, white
 SIZE RANGE 9, 10, 11, 12

LENGTH RANGE 342-396 mm
 PAIRS PER PACKAGE/CARTON 3/30
 DISPLAY Hook with hangtag
 FEATURES Extra long, reinforced thumb, waterproof
 PROPERTIES Good fingertip sensitivity, flexible, durable, good grip, perfect fit, extremely warm
 PRIMARY ENVIRONMENTS OF USE Outdoors, cold environments, wet environments, moist environments, harsh environments



AQUATHAN®

Thinsulate
INSULATION

TEGERA®

TEGERA® 595

Leather glove, winter-lined, 1,1 - 1,4 mm full grain cowhide of top quality, Thinsulate® 200g, Cat. II, reinforced fingers and thumb, waterproof, for allround work

PALM MATERIAL Full grain cowhide of top quality
 BACK MATERIAL Full grain cowhide of top quality
 LINING Winter-lined
 LINING MATERIAL Thinsulate® 200g
 FASTENING String lock
 COLOUR White, black
 SIZE RANGE 9, 10, 11, 12
 LENGTH RANGE 342-396 mm

PAIRS PER PACKAGE/CARTON 3/30
 DISPLAY Hook with hangtag
 FEATURES Extra long, reinforced fingers and thumb, waterproof
 PROPERTIES Good fingertip sensitivity, flexible, durable, good grip, perfect fit, extra comfortable, extremely warm
 PRIMARY ENVIRONMENTS OF USE Outdoors, cold environments, wet environments, moist environments, harsh environments



AQUATHAN®

Thinsulate
INSULATION

TEGERA®

TEGERA® 296

Leather glove, winter-lined, 0,7-0,8 mm full grain cowhide, neoprene, polyester, Cat. II, wind and waterproof back, waterproof, for allround work

PALM MATERIAL Full grain cowhide
 BACK MATERIAL Neoprene, polyester
 LINING Winter-lined
 FASTENING Elasticated 360°
 COLOUR Black, white
 SIZE RANGE 7, 8, 9, 10, 11, 12
 LENGTH RANGE 255-310 mm
 PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Hook with hangtag
 FEATURES Extra long, reinforced fingers and thumb, pre-curved fingers, wind and waterproof back, waterproof
 PROPERTIES High level of protection, good fingertip sensitivity, flexible, durable, good grip, perfect fit, extra comfortable, warm
 PRIMARY ENVIRONMENTS OF USE Windy environments, cold environments, wet environments, harsh environments



Cat. II

EN 388
2121EN 511
120

AQUATHAN®

Thinsulate
INSULATION
 **TEGERA®**
TEGERA® 299

Leather glove, winter-lined, 0,7-0,8 mm full grain cowhide, neoprene, polyester, Cat. II, wind and waterproof back, waterproof, for allround work

PALM MATERIAL Full grain cowhide
 BACK MATERIAL Neoprene, polyester
 LINING Winter-lined
 FASTENING Elasticated 360°
 COLOUR Green high-viz, black, white
 SIZE RANGE 7, 8, 9, 10, 11, 12
 LENGTH RANGE 255-310 mm
 PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Hook with hangtag
 FEATURES Extra long, high-viz colour, reinforced fingers and thumb, pre-curved fingers, wind and waterproof back, waterproof
 PROPERTIES High level of protection, good fingertip sensitivity, flexible, durable, good grip, perfect fit, extra comfortable, warm
 PRIMARY ENVIRONMENTS OF USE Dark environments, windy environments, cold environments, wet environments



AQUATHAN®



Cat. II

EN 388
2121EN 511
120Thinsulate
INSULATION
 **TEGERA®**
TEGERA® 684

Synthetic glove, winter-lined, latex, 3/4 dipped, granulated, fleece, Cat. II, water repellent, anatomically designed, for allround work

DIPPING 3/4 dipped
 DIPPING MATERIAL Latex
 LINING Winter-lined
 LINING MATERIAL Fleece
 GRIP PATTERN Granulated
 COLOUR Black, blue
 SIZE RANGE 7, 8, 9, 10, 11

LENGTH RANGE 240 - 270mm
 PAIRS PER PACKAGE/CARTON 6/60
 DISPLAY Hook with hangtag
 FEATURES Water repellent palm, windproof back
 PROPERTIES Durable, good grip, good fit
 PRIMARY ENVIRONMENTS OF USE Cold environments, moist environments



Cat. II

EN 388
1121EN 511
01X
 **TEGERA®**

TEGERA® 7350

Chemical protection glove, winter-lined, nitrile, sandy finish, fleece, Cat. III, oil and grease resistant, for allround work

DIPPING MATERIAL Nitrile
LINING Winter-lined
LINING MATERIAL Fleece
GRIP PATTERN Sandy finish
COLOUR Blue
SIZE RANGE 8, 9, 10, 11
LENGTH RANGE 300 mm
PAIRS PER PACKAGE/CARTON 5/60
AQL 1.5
DISPLAY Bag with euro slot

FEATURES Protection against chemicals, approved for handling foodstuffs, latex-free, oil and grease resistant
PROPERTIES High level of protection, durable, good grip, good fit, warm
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, cold environments, wet environments, moist environments, oil and greasy environments, dirty environments

**TEGERA® 795**

Textile glove, acrylic, 10 gg, Cat. I, for allround work

LINER MATERIAL Acrylic, 10 gg
FASTENING Elasticated 360°
COLOUR Black
PAIRS PER PACKAGE/CARTON 12/120
DISPLAY Bag


FEATURES Phthalate-free, soft, elastic
PROPERTIES Good fingertip sensitivity, flexible, good grip, comfortable, warm
PRIMARY ENVIRONMENTS OF USE Windy environments, dry environments, clean environments, cold environments

**TEGERA® 790**

Textile glove, acrylic, 7 gg, Cat. I, for allround work

LINER MATERIAL Acrylic, 7 gg
COLOUR Black
SIZE RANGE 7, 9, 10
PAIRS PER PACKAGE/CARTON 12/120

DISPLAY Bag
PROPERTIES Warm
PRIMARY ENVIRONMENTS OF USE Cold environments



HEAVY WEIGHT

You work with rough materials so you need gloves made from strong, hardwearing materials.


COLD INSULATION GLOVES / HEAVY WEIGHT

TEGERA® 9164

Synthetic leather glove, winter-lined, 0,7 mm Microthan®+, diamond grip pattern, polyester, fleece, Thinsulate® 100g, Cat. II, chrome free, for heavy work

PALM MATERIAL Microthan®+
BACK MATERIAL Polyester
LINING Winter-lined
LINING MATERIAL Fleece, Thinsulate® 100g
GRIP PATTERN Diamond grip pattern
FASTENING Velcro®
COLOUR Black, silver
SIZE RANGE 7, 8, 9, 10, 11, 12
LENGTH RANGE 258-310 mm
PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Hook with hangtag
FEATURES Chrome free, reinforced palm, reinforced seams, water repellent, reflector
PROPERTIES Very durable, excellent grip, good fit, extra comfortable
PRIMARY ENVIRONMENTS OF USE Dark environments, windy environments, slippery environments, dry environments, cold environments, moist environments, oil and greasy environments, dirty environments, harsh environments




MicroThan®+   **TEGERA®**

TEGERA® 10

Leather glove, winter-lined, 0,7-0,8 mm full grain goatskin, artificial fur, Cat. II, water repellent leather, for heavy work

PALM MATERIAL Full grain goatskin
BACK MATERIAL Full grain goatskin
LINING Winter-lined
LINING MATERIAL Artificial fur
COLOUR White, black
SIZE RANGE 11
LENGTH RANGE 270 mm

PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Thread
FEATURES Water repellent leather
PROPERTIES High level of protection, durable, extra comfortable, warm
PRIMARY ENVIRONMENTS OF USE Cold environments, moist environments




  **TEGERA®**

TEGERA® 56

Leather glove, winter-lined, 1,2-1,4 mm full grain oxhide of top quality, cotton, fleece, Cat. II, reinforced fingers and thumb, water repellent palm, for heavy work

PALM MATERIAL Full grain oxhide of top quality
 BACK MATERIAL Cotton
 LINING Winter-lined
 LINING MATERIAL Fleece
 FASTENING Elasticated 180°
 COLOUR Grey, white
 SIZE RANGE 8, 10, 11
 LENGTH RANGE 245-295 mm


PAIRS PER PACKAGE/CARTON 6/60
 DISPLAY Thread
 FEATURES Reinforced index finger, reinforced fingers and thumb, waterproof palm
 PROPERTIES High level of protection, good fingertip sensitivity, flexible, very durable, good grip, good fit, comfortable, warm
 PRIMARY ENVIRONMENTS OF USE Outdoors, cold environments, wet environments

**TEGERA® 57**

Leather glove, winter-lined, 1,0-1,2 mm full grain oxhide, cotton, fleece, Cat. II, reinforced index finger, reinforced fingers and thumb, for heavy work

PALM MATERIAL Full grain oxhide
 BACK MATERIAL Cotton
 LINING Winter-lined
 LINING MATERIAL Fleece
 COLOUR Grey, white
 SIZE RANGE 8, 10, 11
 LENGTH RANGE 255-270 mm

PAIRS PER PACKAGE/CARTON 6/60
 DISPLAY Thread
 FEATURES Reinforced index finger, reinforced fingers and thumb
 PROPERTIES High level of protection, durable, good grip, good fit, comfortable, warm
 PRIMARY ENVIRONMENTS OF USE Outdoors, cold environments

**TEGERA® 298**

Leather glove, winter-lined, 1,2-1,4 mm full grain cowhide, nylon, fleece, Cat. II, reinforced fingers and thumb, high-viz colour, for heavy work

PALM MATERIAL Full grain cowhide
 BACK MATERIAL Nylon
 LINING Winter-lined
 LINING MATERIAL Fleece
 FASTENING Elasticated 180°
 COLOUR Green high-viz
 SIZE RANGE 8, 10
 LENGTH RANGE 260-280 mm

PAIRS PER PACKAGE/CARTON 6/60
 DISPLAY Thread
 FEATURES High-viz colour, reinforced index finger, reinforced fingers and thumb, reflector
 PROPERTIES Very durable, good grip, good fit, warm
 PRIMARY ENVIRONMENTS OF USE Dark environments, cold environments




TEGERA® 377

Leather glove, winter-lined, 0,7-0,8 mm full grain pigskin, cotton, artificial fur, Cat. II, reinforced index finger, reinforced fingers and thumb, for heavy work

PALM MATERIAL Full grain pigskin
 BACK MATERIAL Cotton
 LINING Winter-lined
 LINING MATERIAL Artificial fur
 FASTENING Elasticated 180°
 COLOUR Black, white
 SIZE RANGE 8, 10, 11


LENGTH RANGE 270-290 mm
 PAIRS PER PACKAGE/CARTON 6/60
 DISPLAY Hook with hangtag
 FEATURES Reinforced index finger, reinforced fingers and thumb
 PROPERTIES Warm
 PRIMARY ENVIRONMENTS OF USE Cold environments

**TEGERA® 683**

Synthetic glove, nitrile, 3/4 dipped, acrylic, nylon, polyester, 7 gg, 13 gg, sandy finish, Cat. II, high-viz colour, water repellent palm, for heavy work

LINER MATERIAL Acrylic, nylon, polyester, 7 gg, 13 gg
 DIPPING 3/4 dipped
 DIPPING MATERIAL Nitrile
 GRIP PATTERN Sandy finish
 COLOUR Yellow high-viz, black
 SIZE RANGE 7, 8, 9, 10, 11


LENGTH RANGE 240-280 mm
 PAIRS PER PACKAGE/CARTON 6/60
 DISPLAY Hook with hangtag
 FEATURES High-viz colour, water and oil repellent palm and knuckle
 PROPERTIES Durable, warm
 PRIMARY ENVIRONMENTS OF USE Cold environments, wet environments

**TEGERA® 6281**

Synthetic glove, latex, palm-dipped, polyester, 7 gg, Cat. II, high-viz colour, for heavy work

LINER MATERIAL Polyester, 7 gg
 DIPPING Palm-dipped
 DIPPING MATERIAL Latex
 COLOUR Yellow high-viz, black
 SIZE RANGE 7, 8, 9, 10, 11
 LENGTH RANGE 240-280 mm

PAIRS PER PACKAGE/CARTON 6/60
 DISPLAY Hook with hangtag
 FEATURES Waterproof palm
 PROPERTIES Durable, good fit, comfortable, warm
 PRIMARY ENVIRONMENTS OF USE Cold environments




TEGERA® 682

Synthetic glove, latex, 3/4 dipped, acrylic, polyester, 10 gg, sandy finish, Cat. II, high-viz colour, water repellent palm, for heavy work

LINER MATERIAL Acrylic, polyester, 10 gg
DIPPING 3/4 dipped
DIPPING MATERIAL Latex
GRIP PATTERN Sandy finish
COLOUR Orange high-viz, black
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 240-280 mm


PAIRS PER PACKAGE/CARTON 6/60
DISPLAY Hook with hangtag
FEATURES High-viz colour, water and oil repellent palm and knuckle
PROPERTIES Good grip, warm
PRIMARY ENVIRONMENTS OF USE Cold environments, wet environments

**TEGERA® 7390**

Chemical protection glove, winter-lined, PVC (Vinyl), fully dipped, acrylic, sandy finish, fleece, Cat. III, for heavy work

LINER MATERIAL Acrylic
DIPPING Fully dipped
DIPPING MATERIAL PVC (Vinyl)
LINING Winter-lined
LINING MATERIAL Fleece
GRIP PATTERN Sandy finish
COLOUR Blue
SIZE RANGE 9, 10
LENGTH RANGE 300 mm

PAIRS PER PACKAGE/CARTON 6/36
AQL 0.65
DISPLAY Bag
PROPERTIES Flexible, very durable, good grip, good fit, comfortable, warm
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, environments hazardous to health, corrosive environments, outdoors, moist environments, oil and greasy environments, dirty environments, harsh environments

**TEGERA® 494**

Chemical protection glove, winter-lined, neoprene, crinkled grip pattern, Cat. III, withstands contact heat up to 500°C, extra long, latex-free, for heavy work

DIPPING MATERIAL Neoprene
LINING Winter-lined
GRIP PATTERN Crinkled grip pattern
COLOUR Black
SIZE RANGE 10
LENGTH RANGE 450 mm
PAIRS PER PACKAGE/CARTON 6/60
AQL 0.65
DISPLAY Bag

FEATURES Protection against chemicals, withstands contact heat up to 500°C, extra long, latex-free
PROPERTIES Very durable, good grip, warm
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, cold environments, warm environments, moist environments, dirty environments, harsh environments





HEAT PROTECTION GLOVES

We have a wide range of heat-resistant gloves that all are made from a material that cannot burn and that provide excellent durability and perfect fit. They are tanned so as to cope with high temperatures without shrinking or hardening. Available in lined and unlined models to suit different needs.

MEDIUM WEIGHT

You need hardwearing gloves in a durable material. At the same time, they must be supple and comfortable to wear.

HEAT PROTECTION GLOVES / MEDIUM WEIGHT

TEGERA® 8

Heat-resistant glove, unlined, 1,0 - 1,2 mm full grain cowhide, split grain cowhide, Cat. II, withstands contact heat up to 100°C, reinforced seams, for allround work

PALM MATERIAL Full grain cowhide
BACK MATERIAL Split grain cowhide
LINING Unlined
FASTENING Elasticated 180°
COLOUR White, yellow
SIZE RANGE 8, 10
LENGTH RANGE 330-360 mm

PAIRS PER PACKAGE/CARTON 6/60
FEATURES Withstands contact heat up to 100°C, reinforced index finger, reinforced seams, withstands welding sparks and grinding splash
PROPERTIES High level of protection, good fingertip sensitivity, durable, good fit
PRIMARY ENVIRONMENTS OF USE Warm environments, harsh environments



Cat. II



EN 388
3142



EN 407
413X4X

EN 12477 Type B



TEGERA®

TEGERA® 32

Heat-resistant glove, fully lined, 0,7-0,8 mm full grain goatskin of top quality, full grain cowhide, KEVLAR® fiber, Cat. II, reinforced index finger, water and oil repellent, for allround work

PALM MATERIAL Full grain goatskin of top quality
BACK MATERIAL Full grain cowhide
LINING Fully lined
LINING MATERIAL KEVLAR® fiber
FASTENING Elasticated 180°
COLOUR Brown, black
SIZE RANGE 7, 8, 9, 10, 11, 12, 13
LENGTH RANGE 250-290 mm
PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Thread
FEATURES Withstands contact heat up to 100°C, reinforced index finger, reinforced seams, reinforced thumb, water and oil repellent, flame retardant, withstands welding sparks and grinding splash
PROPERTIES High level of protection, good fingertip sensitivity, durable, perfect fit
PRIMARY ENVIRONMENTS OF USE Moist environments, oil and greasy environments, harsh environments



Cat. II



EN 388
3243



EN 407
41224X



TEGERA®

TEGERA® 139

Heat-resistant glove, fully lined, 0,9-1,1 mm split grain cowhide, cotton, KEVLAR® fiber, Cat. II, reinforced index finger, reinforced fingers and thumb, for allround work

PALM MATERIAL Split grain cowhide
 BACK MATERIAL Cotton
 LINING Fully lined
 LINING MATERIAL KEVLAR® fiber
 FASTENING Elasticated 180°
 COLOUR Black, yellow
 SIZE RANGE 6, 7, 8, 9, 10, 11, 12, 13, 14, 15
 LENGTH RANGE 265-305 mm

PAIRS PER PACKAGE/CARTON 6/60
 DISPLAY Thread
 FEATURES Withstands contact heat up to 100°C, reinforced index finger, reinforced fingers and thumb, reflector
 PROPERTIES High level of protection, good fingertip sensitivity, durable, good fit
 PRIMARY ENVIRONMENTS OF USE Warm environments, harsh environments



CE Cat. II EN 388 4244 EN 407 41324X EN 1149-2 R:1,34x10¹ºΩ ⓘ

■ TEGERA®

TEGERA® 169

Heat-resistant glove, fully lined, 0,7-0,8 mm split grain cowhide, cotton, KEVLAR® fiber, Cat. II, reinforced fingers and thumb, water repellent leather, for allround work

PALM MATERIAL Split grain cowhide
 BACK MATERIAL Cotton
 LINING Fully lined
 LINING MATERIAL KEVLAR® fiber
 FASTENING Elasticated 180°
 COLOUR Black, brown
 SIZE RANGE 7, 8, 9, 10, 11, 12, 13
 LENGTH RANGE 250-300 mm
 PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Thread
 FEATURES Withstands contact heat up to 100°C, reinforced index finger, reinforced seams, reinforced fingers and thumb, water and oil repellent
 PROPERTIES High level of protection, good fingertip sensitivity, durable, good fit
 PRIMARY ENVIRONMENTS OF USE Warm environments, moist environments, harsh environments



CE Cat. II EN 388 3132 EN 407 41214X EN 1149-2 R:4,29x10¹ºΩ ⓘ



■ TEGERA®

TEGERA® 484

Heat-resistant glove, nitrile-dots, cotton, dots, Cat. III, withstands contact heat up to 250°C, extra long, for allround work

LINER MATERIAL Cotton
 MATERIAL Nitrile-dots
 GRIP PATTERN Dots
 COLOUR Red, white
 SIZE RANGE 10
 LENGTH RANGE 350mm

PAIRS PER PACKAGE/CARTON 6/72
 FEATURES Withstands contact heat up to 250°C
 PROPERTIES Durable, good grip
 PRIMARY ENVIRONMENTS OF USE Warm surfaces, warm environments



CE Cat. III EN 388 1232 EN 407 02XXXX ⓘ

■ TEGERA®

HEAVY WEIGHT

You work with rough materials so you need gloves made from strong, hardwearing materials.

HEAT PROTECTION GLOVES / HEAVY WEIGHT

TEGERA® 17

Heat-resistant glove, fully lined, 1,2-1,4 mm split grain cowhide of top quality, jersey, Cat. II, withstands contact heat up to 100°C, reinforced seams, for heavy work

PALM MATERIAL Split grain cowhide of top quality

BACK MATERIAL Split grain cowhide of top quality

LINING Fully lined

LINING MATERIAL Jersey

FASTENING Elasticated 180°

COLOUR Yellow

SIZE RANGE 8, 10, 11

LENGTH RANGE 240-280 mm

PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Thread

FEATURES Withstands contact heat up to 100°C, reinforced seams, flame retardant, withstands welding sparks and grinding splash

PROPERTIES High level of protection, good fingertip sensitivity, very durable, good fit

PRIMARY ENVIRONMENTS OF USE Warm environments, harsh environments



Cat. II



EN 388
3223



EN 407
413X4X



 **TEGERA®**

TEGERA® 464

Heat-resistant glove, nitrile, cotton, Cat. III, withstands contact heat up to 250°C, extra long, for heavy work

LINER MATERIAL Cotton

MATERIAL Nitrile

COLOUR Grey

SIZE RANGE 9, 10, 11

LENGTH RANGE 350 mm

PAIRS PER PACKAGE/CARTON 6/60

PROPERTIES High level of protection



Cat. III



EN 388
3242



EN 407
x2xxxx



 **TEGERA®**

TEGERA® 494

Chemical protection glove, winter-lined, neoprene, crinkled grip pattern, Cat. III, withstands contact heat up to 500°C, extra long, latex-free, for heavy work

DIPPING MATERIAL Neoprene

LINING Winter-lined

GRIP PATTERN Crinkled grip pattern

COLOUR Black

SIZE RANGE 10

LENGTH RANGE 450 mm

PAIRS PER PACKAGE/CARTON 6/60

AQL 0.65

DISPLAY Bag

FEATURES Protection against chemicals, withstands contact heat up to 500°C, extra long, latex-free

PROPERTIES Very durable, good grip, warm

PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, cold environments, warm environments, moist environments, dirty environments, harsh environments



Cat. III



EN 388
3121



EN 407
44XXXX



EN 511
021



EN 374-2



EN 374-3
AJKL



TEGERA®





WELDING GLOVES

Welding gloves are longer than heat resistant gloves.

LIGHT WEIGHT

For precision and assembly work, your fingers need freedom of movement.
The gloves must be very supple, flexible and ergonomically sound.

WELDING GLOVES / LIGHT WEIGHT

TEGERA® 11CVA

Welding and heat-resistant glove, 0,7-0,8 mm full grain goatskin of top quality, Cat. II, reinforced seams, chrome free, for allround work

PALM MATERIAL Full grain goatskin of top quality

BACK MATERIAL Full grain goatskin of top quality

FASTENING Elasticated 180°

COLOUR Yellow, white

SIZE RANGE 8, 10, 11

LENGTH RANGE 320-350 mm

PAIRS PER PACKAGE/CARTON 12/60

DISPLAY Thread

FEATURES Withstands contact heat up to 100°C, chrome free, reinforced seams, water repellent leather

PROPERTIES High level of protection, good fingertip sensitivity, flexible, durable, good fit

PRIMARY ENVIRONMENTS OF USE

Warm surfaces, dirty environments, harsh environments



Cat. II



EN 388
3121



EN 407
412X4X

EN 12477 + A1

Type B

EN 1149-2
R:0.38x10°Ω



TEGERA®

TEGERA® 126A

Welding and heat-resistant glove, unlined, 0,7-0,8 mm full grain goatskin of top quality, Cat. II, withstands contact heat up to 100°C, reinforced seams, for assembly work

PALM MATERIAL Full grain goatskin of top quality

BACK MATERIAL Full grain goatskin of top quality

LINING Unlined

FASTENING Elasticated 180°

COLOUR White, yellow

SIZE RANGE 7, 8, 9, 10, 11

LENGTH RANGE 310-350 mm

PAIRS PER PACKAGE/CARTON 12/60

DISPLAY Thread

FEATURES Withstands contact heat up to 100°C, reinforced index finger, reinforced seams, KEVLAR® thread in the seams which resists 427° C short-term heat exposure (max operating limit) and 204° C longer-term heat exposure (constant operating limit)

PROPERTIES High level of protection, extremely good fingertip sensitivity, extra flexible, durable, perfect fit

PRIMARY ENVIRONMENTS OF USE All-year use, warm environments, dirty environments, harsh environments



Cat. II



EN 388
2111



EN 407
412X4X

EN 12477 + A1

Type B

EN 1149-2
R:2.55x10°Ω



TEGERA®

TEGERA® 130A

Welding and heat-resistant glove, unlined, 0,7-0,8 mm full grain goatskin, Cat. II, withstands contact heat up to 100°C, reinforced index finger, reinforced seams, for allround work

PALM MATERIAL Full grain goatskin

BACK MATERIAL Full grain goatskin

LINING Unlined

COLOUR White, yellow

SIZE RANGE 6, 7, 8, 9, 10, 11

LENGTH RANGE 300-350 mm

PAIRS PER PACKAGE/CARTON 12/60

DISPLAY Thread

FEATURES Withstands contact heat up to 100°C, reinforced index finger, KEVLAR® thread in the seams wich resists 427° C short-term heat exposure (max operating limit) and 204° C longer-term heat exposure (constant operating limit), flame retardant, withstands welding sparks and grinding splash

PROPERTIES High level of protection, good fingertip sensitivity, flexible, durable, good fit

PRIMARY ENVIRONMENTS OF USE Warm environments, dirty environments, harsh environments



Cat. II



EN 388
3111



EN 407
412X4X

EN 12477 + A1

Type B

EN 1149-2
R:11,09x10°Ω



TEGERA®



MEDIUM WEIGHT

You need hardwearing gloves in a durable material. At the same time, they must be supple and comfortable to wear.

WELDING GLOVES / MEDIUM WEIGHT

TEGERA® 134

Welding and heat-resistant glove, fully lined, 0,7-0,8 mm full grain goatskin, KEVLAR® fiber, Nomex®, Cat. III, extra long, reinforced seams, water and oil repellent, for allround work

PALM MATERIAL Full grain goatskin
BACK MATERIAL Full grain goatskin
LINING Fully lined
LINING MATERIAL KEVLAR® fiber, Nomex®
FASTENING Elasticated 180°
COLOUR Brown, black
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 395 mm
PAIRS PER PACKAGE/CARTON 6/60

DISPLAY Thread
FEATURES Withstands contact heat up to 100°C, extra long, reinforced index finger, reinforced seams, water and oil repellent, withstands welding sparks and grinding splash
PROPERTIES High level of protection, good fingertip sensitivity, durable, good fit
PRIMARY ENVIRONMENTS OF USE Cut risk environments, warm environments, moist environments, oil and greasy environments, harsh environments



Cat. III



EN 388
3222



EN 407
41234X

EN 12477 + A1 Type A

EN 1149-2
R:4,11x10¹¹Ω



TEGERA®

TEGERA® 132A

Welding and heat-resistant glove, fully lined, 0,8-0,9 mm full grain goatskin of top quality, full grain cowhide of top quality, cut resistance level 4, KEVLAR® fiber, Cat. II, reinforced seams, water and oil repellent, for allround work

PALM MATERIAL Full grain goatskin of top quality
BACK MATERIAL Full grain cowhide of top quality
LINING Fully lined
LINING MATERIAL KEVLAR® fiber
FASTENING Elasticated 180°
COLOUR Brown, black
SIZE RANGE 7, 8, 9, 10, 11, 12, 13
LENGTH RANGE 310-370 mm
PAIRS PER PACKAGE/CARTON 12/60

DISPLAY Thread
FEATURES Cut resistant according to EN 388 level 4 (5), withstands contact heat up to 100°C, reinforced seams, water and oil repellent
PROPERTIES High level of protection, good fingertip sensitivity, durable, good grip, perfect fit
PRIMARY ENVIRONMENTS OF USE Warm environments, moist environments, oil and greasy environments, dirty environments, harsh environments



Cat. II



EN 388
3432



EN 407
41234X

EN 12477 + A1 Type A

EN 1149-2
R:0.130x10⁹Ω



TEGERA®

TEGERA® 118A

Welding and heat-resistant glove, unlined, 0,7-0,8 mm full grain goatskin, split grain cowhide, Cat. II, reinforced seams, withstands welding sparks and grinding splash, for allround work

PALM MATERIAL Full grain goatskin

BACK MATERIAL Split grain cowhide

LINING Unlined

FASTENING Elasticated 180°

COLOUR Yellow, white

SIZE RANGE 7, 8, 9, 10, 11, 12

LENGTH RANGE 310-360 mm

PAIRS PER PACKAGE/CARTON 12/60

DISPLAY Thread

FEATURES Withstands contact heat up to 100°C, reinforced index finger, reinforced seams, withstands welding sparks and grinding splash

PROPERTIES High level of protection, good fingertip sensitivity, good fit

PRIMARY ENVIRONMENTS OF USE All-year use, warm environments, dirty environments, harsh environments



Cat. II



EN 388
3121



EN 407
412X4X

EN 12477 + A1

Type B

EN 1149-2
R:12.21x10°Ω



TEGERA®



HEAVY WEIGHT

You work with rough materials so you need gloves made from strong, hardwearing materials.

WELDING GLOVES / HEAVY WEIGHT

TEGERA® 19

Welding and heat-resistant glove, fully lined, 1,2-1,4 mm split grain cowhide of top quality, jersey, Cat. II, withstands contact heat up to 100°C, reinforced seams, for heavy work

PALM MATERIAL Split grain cowhide of top quality

BACK MATERIAL Split grain cowhide of top quality

LINING Fully lined

LINING MATERIAL Jersey

FASTENING Elasticated 180°

COLOUR Yellow

SIZE RANGE 8, 9, 10, 11

LENGTH RANGE 310-360 mm

PAIRS PER PACKAGE/CARTON 6/60

FEATURES Withstands contact heat up to 100°C, reinforced seams, flame retardant, withstands welding sparks and grinding splash

PROPERTIES High level of protection, good fingertip sensitivity, very durable, good fit

PRIMARY ENVIRONMENTS OF USE Warm environments, harsh environments



YOU CAN PURCHASE AN EXTRA LEFT GLOVE
SEPARATELY, TEGERA® LEFT 19-10



Cat. II



EN 388
3143



EN 407
41324X

EN 12477 + A1

Type A

EN 1149-2
R:26,138x10°Ω



TEGERA®

TEGERA® 585

Welding and heat-resistant glove, fully lined, 1,3-1,5 mm split grain cowhide of top quality, aluminium, cut resistance level 3, KEVLAR® fiber, Cat. III, withstands contact heat up to 250°C, water and oil repellent palm, for allround work

PALM MATERIAL Split grain cowhide of top quality

BACK MATERIAL Aluminium

LINING Fully lined

LINING MATERIAL KEVLAR® fiber

FASTENING Velcro®

COLOUR Silver, red

SIZE RANGE 8, 9, 10, 11, 12

LENGTH RANGE 375-415 mm

PAIRS PER PACKAGE/CARTON 3/30

DISPLAY Thread

FEATURES Cut resistant according to EN 388 level 3 (5), withstands contact heat up to 250°C, water and oil repellent palm, withstands welding sparks and grinding splash

PROPERTIES Highest level of protection, good fingertip sensitivity, flexible, good fit

PRIMARY ENVIRONMENTS OF USE Cut risk environments, warm surfaces, warm environments, moist environments, oil and greasy environments, dirty environments, harsh environments



Cat. III



EN 388
3344



EN 407
423344

EN 12477 + A1

Type A

EN 1149-2
R:41.8*10°Ω



TEGERA®



DISPOSABLE AND/OR CHEMICAL RESISTANT GLOVES



Protect yourself against hazardous chemicals

If you handle oils and chemical without protecting your hands, you're exposing yourself not only to skin damage but also to damage to your nervous system and vital organs. You also risk developing skin irritants, oversensitivity and corrosion damage because of the chemicals.

ASK US

Always use our chemical protection guide or consult with our sellers when choosing gloves. Chemical protection gloves are intended for single-day use, and sometimes for even shorter periods.

THINGS TO CONSIDER WHEN CHOOSING CHEMICAL PROTECTION GLOVES:

- A glove that gives good protection against a certain individual chemical may give very poor protection against a mixture of chemicals.
- As a rule, chemical protection gloves are intended for single-day use. They must not be reused.
- A used glove is chemically contaminated and there is a risk that the skin will be exposed to harmful substances when it is handled.
- Higher temperatures shorten the time it takes for the chemical to break through.
- Thicker materials generally mean longer breakthrough times.
- Once a chemical has been absorbed, it continues to break through (permeate) the protective glove.
- Permeation through a protective glove takes place at the molecular level and is therefore not visible to the naked eye.
- Even the best gloves lose their protective properties if they are mechanically damaged or if the chemical has broken through the material.
- Strongly corrosive chemicals can destroy the glove material by breaking it down before the specified breakthrough time.

PERMEATION is a process whereby the chemical is absorbed into and passes through the glove material at a molecular level.

PENETRATION involves the chemical moving through pinholes and other imperfections in the glove material.

DEGRADATION is when the glove material's physical resistance deteriorates under the influence of a chemical.

MIXING CHEMICALS CAN HAVE UNEXPECTED RESULTS

Two chemicals with known characteristics can produce unexpected effects when mixed. Since the number of chemicals marketed is huge, it is virtually impossible to test all conceivable combinations of them. Models do exist for estimating combined effects on the basis of what is known about the component chemicals. However, they presuppose that data is available and that the various chemicals involved have the same mechanisms of action. This means that the models can only be used for groups of chemicals that act in a similar way – not for the complex mix of chemicals that we are exposed to in reality.

Contact one of our sellers and get help in finding a suitable glove for protection against the relevant chemical mix.



Chemical protection guide

Light green fields represent more than 4 hours protection against breakthrough, and dark green fields represent more than 8 hours protection against breakthrough. Light green fields indicate even if testing on permeation is interrupted after 4 hours. Note: The recommendations are based on reports from permeation tests that were conducted at room temperature during continual contact. At higher temperatures the breakthrough time can be shortened.

T+ = Very toxic
T = Toxic
K = Can lead to cancer
M = Can lead to genetic damage
S = Can lead to allergies
R = Can lead to reduced ability to reproduce

Xn = Harmful
Xi = Irritant
Cx = Very corrosive
C = Corrosive
F+ = Extremely combustible
F = Very combustible,
3 after K or M = 'suspected of leading to cancer'

Chemical name (Synonym)	Butyl rubber	Natural rubber	Neoprene rubber	Nitrile rubber	Polyethylene, PE	Polyvinyl alcohol PVA	Polyvinyl chloride PVC	Viton®	Danger
Acetaldehyde									Xn, K3, F+
Acetone									F
Acetonitrile									T, F
Acrylamide, 30-70%									T, K2, M, R, S
Acrylonitrile									T, K2, F
Acrylic acid									C
Allyl alcohol									T
Allylamine									T
Allylchloride (3-Chloropropene)									T+, F
Ammonium fluoride, 30-70%									T+, F
Ammonia solution, 30%									C
Aniline									T, C3
Battery acid									C
Benzene									T, K1
Petrol, unleaded									T, K2
Benzoyl chloride									T, K2
Benzaldehyde									Xn, K3, F+
3-Bromopropionic acid									C
Hydrobromic acid, 30-70%									Cx
n-Butyl acetate									
n-Butanol (Butyl alcohol)									Xi
Butyl acrylate									Xi, S
n-Butylamine									X, C, F
Butyl glycol (2-Butoxy ethanol)									Xi
Butyl glycol acetate (2-Butoxyethyl acetate)									X, C, F
gamma-Butyrolactone									X
Cyclohexane									Xi
Cyclohexanole									Xi
Cyclohexanone									X
Diesel									X, K3, F
Diethanolamine									Xi
Diethylamine									C, X, F
Diethyldichlorosilane									C, F
Diethylenglycol									Xn
Diethylenetriamine									C, X, S

Chemical name (Synonym)	Butyl rubber	Natural rubber	Neoprene rubber	Nitrile rubber	Polyethylene, PE	Polyvinyl alcohol PVA	Polyvinyl chloride PVC	Viton®	Danger
Diglycidyl ether of bisphenol A									Xi, S
Diisobutyl ketone									Xi
Diisopropylamine									C, Xi, F
2-(Diethylamino)ethanol									C, Xn
1,2-Dichlorobenzene (o-Dichlorobenzene)									Xi
1,2-Dichloroethylene									Xn, F
N,N-Dimethylacetamide									T, R
N,N-Dimethylaniline (DMA)									T, K3
Dimethylformamide (DMF)									T
Dimethyl sulphate									T+, K2, M, S, C
Dimethylsulphoxide									Xi
Di-n-butyl phthalate (DBP)									T, R
Diethyl phthalate (DOP)									T, R
1,4-Dioxane									Xn, K3, F
Dynamite									T+
Epichlorohydrin									T, K2, S, C
Epoxy, base/accelerator									Xn, S
Ethanol (Ethyl alcohol)									F
Ethanolamine									Xi
Ethyl acetate									Xi, F
Ethyl acrylate									Xi, S, F
Ethylamine (Monoethylamine)									Xi, F+
Ethylbenzene									Xn, F
Ethylenediamine (1,2-Diaminoethane)									Xn, C, S
Ethylene dichloride (1,2-Dichloroethane)									T, K2
Ethylenglycol									Xn
Ethylene oxide gas									T, K2, M, F+
Ethyl ether (Diethyl ether)									Xn, F+
Ethyl glycol (2-Ethoxyethanol)									T, R
Ethyl glycol acetate (2-Ethoxyethyl acetate)									T, R
Ethyl methacrylate									Xi, S, F
Phenol, > 70%									T, C
Fluorhydric acid, 30-70%									T+, Cx
Formaldehyde, 30-70%									T, C, S
Phosphoric acid, >70%									C

The recommendations do not apply to thin (< 0,3 mm) Natural Rubber, Neoprene, Nitrile or PVC gloves

- > 8 hours is recommended.
- > 4 hours is recommended.
- Caution 1 - 4 hours.
- > 1 hour is not recommended (degradation can occur).
- Not tested.

Chemical name (Synonym)	Butyl rubber	Natural rubber	Neoprene rubber	Nitrile rubber	Polyethylene, PE	Polyvinyl alcohol PVA	Polyvinyl chloride PVC	Viton®	Danger
Photogen									Xn
Freon 113/TF									
Furfural (2-Furaldehyde)									T, K3
Furfuryl alcohol									Xn
Tannin									T, C
Glutaraldehyde, 30-70%									T, S
Hepthane									
Hexamethylene-1,6-diisocyanate									T, S
Hexamethyldisilasan									Xn, C, F
n-Hexane									Xn
Hydraulic oil									Xn
Hydrazine									T, C, K2
Hydrochinon									X, S, K3, M3
2-Hydroxyethyl acrylate									T, S
2-Hydroxyethyl methacrylate (HEMA)									Xi, S
Isophorone diisocyanate (IDI)									T, S
Isobutanol (Isobutyl alcohol)									Xi
Isopropanol (Isopropyl alcohol)									Xi
Potassium hydroxide, 30-70%									Cx
Capryl acid (Octane acid)									C
Chlorobenzene									Xn
2-Chloroethanol									T+
Chlorine gas									T
1-Chloronaphthalene									Xn
Chloroform (Trichloromethane)									Xn, K3
Chloroprene (2-Chloro-1,3-butadiene)									Xn, F
o-Chlorotoluene (2-Chlorotoluene)									Xn
Chloroacetic acid (Monochloroacetic acid)									T, C
Carbon disulphide									T, R
Carbon tetrachloride									T, K3
Cresol									T, C
Chromic acid, 30-70%									T, Cx, K, S
Cumen (Isopropylbenzene)									Xn
Aqua regia									Cx
Paint naphta (Low aroma naphta)									Xn
Laurin acid, 30-70%									
Limonene									Xi, S
Malein acid									Xi
Mercaptoacetic acid (Thioglycol acid)									T, C
Methacryl acid									Cx, Xn
Methanol (Methyl alcohol)									T
Methyl acetate									Xi, F
Methylamine, 30-70%									Xi, F+
Methylenbisphenyl-44'-diisocyanate									Xn, S
Methylenbromide (Dibromomethane)									Xn
4,4-Methylenedianiline (MDA)									T, K, S
Methylenchloride (Dichloromethane)									Xn, K3
Methylethylketon (MEK)									Xi, F
Methyl glycol (2-Methoxyethanol)									T, R
Methyl glycol acetate (2-Methoxyethyl acetate)									T, R
Methylisobutylketone (MIBK)									Xn, F
Methyl iodide (Iodine methane)									T, K

Chemical name (Synonym)	Butyl rubber	Natural rubber	Neoprene rubber	Nitrile rubber	Polyethylene, PE	Polyvinyl alcohol PVA	Polyvinyl chloride PVC	Viton®	Danger
Methyl methacrylate									Xi, S
Methyl tert-butyl ether (MTBE)									Xi, F
Morpholine									C
Formic acid, >70%									Cx
Sodium hydroxide, 30-70%									Cx
Sodium hypochlorite, 30-70%									C
Nicotine									T+
Nitrobenzene									T, K3
Nitroglycerol (Nitroglycerin)									T+
Nitroglycol									T+
Nitromethane									Xn
2-Nitropropane									T, K
2-Nitrotoluene									T
Olein acid (Oil acid)									Xi
Oxalic acid									Xn
Palmitin acid									Xi
Pentachlorophenol									T+, K3
n-Pentane									Xn, F+
Perchloroethylene (Tetrachloroethylene)									Xn, K3
Perchloric acid, 30-70%									Cx
Picric acid									T
Piperazine									C, S
Polychlorinated biphenyls (PCB)									Xn
n-Propanol (Propyl alcohol)									Xi, F
1,2-Propylenoxide									T, K, M, F+
Pyridine									Xn, F
Round Up® (Glyphosate)									Xi
Potassium nitrate acid, 30-70%									Cx
Muriatic acid 37%									T, Cx
Lubricating oil									Xn
Butter acid									C
Styrene (Vinylbenzene)									Xn
Sulphuric acid, > 70%									Cx
Terpentine									Xn, S
Tetrahydrofuran									Xi, F
Toluene									Xn, F
Toluene-2,4-diisocyanate (TDI)									T+, S, K3
o-Toluidine									T, K
111-Trichloroethane (Methyl chloroform)									Xn
Tricresylphosfat									T
Triethanolamine, >70% (TEA)									Xi
Triethylamine									C, Xn, F
Triethylenetetraamine (TETA)									Xn, S
Trichloroethylene (TRI)									T, K, M
Trichloroacetic acid									Cx
Vinylidene chloride (1,1-Dichloroethylene)									Xn, F+
Vinyl chloride gas (Chloroethane)									T, K, F+
Hydroperoxide, 30-70% (Hydroxuperoxide)									C
Xylene									Xi
Acetic acid (glacial acetic acid)									Cx
Acetic acid anhydride									C

A full-page background image with a warm, orange-toned filter. It depicts a worker in a hazardous industrial environment, wearing a full-body protective suit, a hood, and a respirator. The worker is leaning over a large, dark, textured object, possibly a piece of machinery or a large container. In the background, there are industrial structures, including a building with a corrugated metal roof and various pipes and equipment. The overall scene conveys a sense of industrial safety and chemical handling.

DISPOSABLE AND/OR CHEMICAL RESISTANT GLOVES

Our chemical protection gloves are available in most protective materials found on the market. Always use our chemical protection guide or consult with our sellers when choosing gloves. Chemical protection gloves are intended for single-day use, and sometimes for even shorter periods.

DISPOSABLE

For precision and assembly work, your fingers need freedom of movement.
The gloves must be very supple, flexible and ergonomically sound.

DISPOSABLE AND/OR CHEMICAL RESISTANT GLOVES – FEATURES AND BENEFITS

- **Nitrile (NBR)** is flexible, elastic, resistant to puncture, durable and approved for use with food. Accelerator-free alternatives are available.
- **Neoprene** is soft, resistant to puncture and durable.
- **Latex/natural rubber (NR)** is soft, resistant to wear and tear and provides good dry grip.
- **Polyvinyl chloride (PVC/VINYL)** is soft and can be used in both thin and thick gloves.
- **Polythene (PE)** is ideal for thin, disposable gloves and is approved for use with food. PE has very limited protective properties.
- **Butyl rubber (IIR)** is soft and effective where other rubber materials are ineffective.
- **Laminates** are used in chemical barrier gloves and are effective against a wide range of chemicals but with a very limited comfort.
- **Viton** is used in chemical barrier gloves and is effective against aromatic compounds and solvents.
- **Polyvinyl alcohol (PVAL)** is used in chemical barrier gloves and protect against most organic compounds.

CHEMICAL	SUITABLE	UNSUITABLE
Aliphatic solvents	Nitrile	Neoprene
Strong acid & alkali	Neoprene	Latex
Ketone	Butyl rubber	Nitrile
Aromatic organic solvents	Viton, Laminate	Nitrile, Neoprene, Butyl rubber, Latex, PVC
Alcohol	Neoprene, Latex	Nitrile, PVC

More detailed information on chemical resistant and/or disposable gloves can be found in the chapter "Protect your hands" and the pages "Understanding materials".

TEGERA® 858

Disposable glove, 0,15 mm nitrile, accelerator-free, non powder, Cat. III, extra long, accelerator-free, latex-free, for precision work

MATERIAL Nitrile, accelerator-free
THICKNESS 0,15 mm
INSIDE Non powder
COLOUR Purple
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 280 mm
BOXES PER CARTON 10
PIECES PER BOX 100
AQL 1.5

DISPLAY Box
FEATURES Splash protection against chemicals, approved for handling foodstuffs, extra long, latex-free
PROPERTIES Good fingertip sensitivity, extra flexible, perfect fit
PRIMARY ENVIRONMENTS OF USE
Chemical risk environments, microbiological risk environments, disposable use, wet environments, moist environments, dirty environments



NITRILE



Cat. III



EN 388
210x



EN 374-2



EN 374-3



TEGERA®

TEGERA® 84101

Disposable glove, 0,10 mm nitrile, extra fingertip grip, non powder, Cat. III, approved for handling foodstuffs, latex-free, for precision work

MATERIAL Nitrile
THICKNESS 0,10 mm
INSIDE Non powder
GRIP PATTERN Extra fingertip grip
COLOUR Blue
SIZE RANGE 7, 8, 9, 10
LENGTH RANGE 240 mm
BOXES PER CARTON 40

PIECES PER BOX 20
AQL 1.5
DISPLAY Box with euro slot
FEATURES Splash protection against chemicals, approved for handling foodstuffs
PROPERTIES Extremely good fingertip sensitivity, extra flexible, good grip, good fit
PRIMARY ENVIRONMENTS OF USE Disposable use, moist environments, dirty environments

**NITRILE**

Cat. III



EN 374-2



EN 374-3

**TEGERA®****TEGERA® 84301**

Disposable glove, 0,06 mm nitrile, extra fingertip grip, non powder, Cat. III, approved for handling foodstuffs, latex-free, for precision work

MATERIAL Nitrile
THICKNESS 0,06 mm
INSIDE Non powder
GRIP PATTERN Extra fingertip grip
COLOUR Blue
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 240 mm
BOXES PER CARTON 10

PIECES PER BOX 200
AQL 1.5
DISPLAY Box
FEATURES Splash protection against chemicals, approved for handling foodstuffs
PROPERTIES Extremely good fingertip sensitivity, extra flexible
PRIMARY ENVIRONMENTS OF USE Disposable use, dirty environments

**NITRILE**

Cat. III



EN 374-2



EN 374-3

**TEGERA®****TEGERA® 84501**

Disposable glove, 0,10 mm nitrile, extra fingertip grip, non powder, Cat. III, approved for handling foodstuffs, latex-free, for precision work

MATERIAL Nitrile
THICKNESS 0,10 mm
INSIDE Non powder
GRIP PATTERN Extra fingertip grip
COLOUR Blue
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 240 mm
BOXES PER CARTON 10
PIECES PER BOX 100

AQL 1.5
DISPLAY Box
FEATURES Splash protection against chemicals, approved for handling foodstuffs, latex-free, conforms with IEC 61340-5-1 (ESD)
PROPERTIES Extremely good fingertip sensitivity, extra flexible, durable, good fit
PRIMARY ENVIRONMENTS OF USE Disposable use, wet environments, dirty environments

**NITRILE**

Cat. III



EN 374-2



EN 374-3

IEC 61340-5-1
R: $1.6 \times 10^7 \Omega$ - $2.4 \times 10^7 \Omega$
**TEGERA®**

TEGERA® 846

Disposable glove, 0,19 mm nitrile, non powder, Cat. III, approved for handling foodstuffs, extra long, latex-free, for precision work

MATERIAL Nitrile
THICKNESS 0,19 mm
INSIDE Non powder
COLOUR Blue
SIZE RANGE 6, 7, 8, 9, 10, 11, 12
LENGTH RANGE 290 mm
PIECES PER PACKAGE/CARTON 50/500
PIECES PER BAG 50
BAGS PER CARTON 10

AQL 1.5
DISPLAY Bag
FEATURES Splash protection against chemicals, approved for handling foodstuffs, conforms with IEC 61340-5-1 (ESD)
PROPERTIES Extra flexible, durable, good fit
PRIMARY ENVIRONMENTS OF USE Microbiological risk environments, wet environments, moist environments, oil and greasy environments, dirty environments

**NITRILE**

Cat. III

EN 388
1001

EN 374-2



EN 374-3

IEC 61340-5-1
R: 2.2x10⁷ Ω – 2.4x10⁷ Ω**TEGERA®****TEGERA® 843**

Disposable glove, 0,06 mm nitrile, non powder, Cat. III, approved for handling foodstuffs, latex-free, for precision work

MATERIAL Nitrile
THICKNESS 0,06 mm
INSIDE Non powder
COLOUR Purple
SIZE RANGE 7, 8, 9, 10
LENGTH RANGE 240 mm
BOXES PER CARTON 10
PIECES PER BOX 100

AQL 1.5
DISPLAY Box
FEATURES Splash protection against chemicals, approved for handling foodstuffs, latex-free
PROPERTIES Extremely good fingertip sensitivity, extra flexible, perfect fit
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, wet environments, moist environments, dirty environments

**NITRILE**

Cat. III



EN 374-2



EN 374-3

**TEGERA®****TEGERA® 848**

Disposable glove, 0,12 mm nitrile, accelerator-free, non powder, Cat. III, extra long, latex-free, for precision work

MATERIAL Nitrile, accelerator-free
THICKNESS 0,12 mm
INSIDE Non powder
COLOUR Purple
SIZE RANGE 6, 7, 8, 9, 10, 11
LENGTH RANGE 290 mm
BOXES PER CARTON 10
PIECES PER BOX 100
AQL 1.5

DISPLAY Box
FEATURES Splash protection against chemicals, approved for handling foodstuffs, extra long, latex-free
PROPERTIES Good fingertip sensitivity, flexible, good fit
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, disposable use, wet environments, moist environments, dirty environments

**NITRILE**

Cat. III



EN 374-2



EN 374-3

**TEGERA®**

TEGERA® 849**NITRILE**

Disposable glove, 0,19 mm nitrile, non powder, Cat. III, extra long, latex-free, for precision work

MATERIAL Nitrile
THICKNESS 0,19 mm
INSIDE Non powder
COLOUR Black
SIZE RANGE 7, 8, 9, 10, 11, 12
LENGTH RANGE 290 mm
BOXES PER CARTON 10
PIECES PER BOX 50
AQL 1.5
DISPLAY Box

FEATURES Splash protection against chemicals, high puncture resistance compared to similar gloves, approved for handling foodstuffs, extra long, latex-free, conforms with IEC 61340-5-1 (ESD)

PROPERTIES High level of protection, good fingertip sensitivity, flexible, very durable, good grip, good fit

PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, disposable use, wet environments, moist environments, oil and greasy environments, dirty environments, harsh environments



Cat. III

EN 388
1001

EN 374-2



EN 374-3

IEC 61340-5-1
R: 4.3x10⁷ Ω – 4.7x10⁷ Ω**TEGERA®****TEGERA® 184****NITRILE**

Chemical protection glove, 0,20 mm nitrile, unflocked, Cat. III, latex-free, for precision work

MATERIAL Nitrile
THICKNESS 0,20 mm
INSIDE Unflocked
COLOUR Blue
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 330 mm
PAIRS PER PACKAGE/CARTON 10/100
AQL 0.65
DISPLAY Bag with euro slot

FEATURES Splash protection against chemicals, approved for handling foodstuffs, latex-free, oil and grease resistant

PROPERTIES Good fingertip sensitivity, extra flexible, good grip, good fit

PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, wet environments, moist environments, oil and greasy environments, dirty environments



Cat. III



EN 374-2



EN 374-3

**TEGERA®****TEGERA® 833****LATEX**

Disposable glove, 0,10 mm latex, non powder, Cat. III, approved for handling foodstuffs, for precision work

MATERIAL Latex
THICKNESS 0,10 mm
INSIDE Non powder
COLOUR White
SIZE RANGE 7, 8, 9, 10
LENGTH RANGE 240 mm
BOXES PER CARTON 10
PIECES PER BOX 100

AQL 1.5

DISPLAY Box

FEATURES Splash protection against chemicals, approved for handling foodstuffs, elastic

PROPERTIES Extra flexible, good fit

PRIMARY ENVIRONMENTS OF USE Wet environments, moist environments, dirty environments



Cat. III



EN 374-2



EN 374-3

**TEGERA®**

TEGERA® 836

Disposable glove, 0,12 mm neoprene, extra fingertip grip, non powder, Cat. III, latex-free, for precision work

MATERIAL Neoprene
THICKNESS 0,12 mm
INSIDE Non powder
GRIP PATTERN Extra fingertip grip
COLOUR Green
SIZE RANGE 7, 8, 9, 10
LENGTH RANGE 240 mm
BOXES PER CARTON 10
PIECES PER BOX 100

AQL 1.5
DISPLAY Box
FEATURES Splash protection against chemicals, elastic
PROPERTIES Extremely good fingertip sensitivity, extra flexible, durable, good grip, perfect fit
PRIMARY ENVIRONMENTS OF USE Corrosive environments, disposable use

**NEOPRENE**

Cat. III



EN 374-2



EN 374-3

**TEGERA®****TEGERA® 837**

Disposable glove, 0,12 mm neoprene, extra fingertip grip, non powder, Cat. III, extra long, latex-free, for precision work

MATERIAL Neoprene
THICKNESS 0,12 mm
INSIDE Non powder
GRIP PATTERN Extra fingertip grip
COLOUR Green
SIZE RANGE 7, 8, 9, 10
LENGTH RANGE 290 mm
BOXES PER CARTON 10
PIECES PER BOX 100

AQL 1.5
DISPLAY Box
FEATURES Splash protection against chemicals, elastic
PROPERTIES Extremely good fingertip sensitivity, extra flexible, durable, good grip, perfect fit
PRIMARY ENVIRONMENTS OF USE Corrosive environments, disposable use

**NEOPRENE**

Cat. III



EN 374-2



EN 374-3



EN 421

**TEGERA®****TEGERA® 819**

Disposable glove, 0,08 mm PVC (Vinyl), Cat. II, latex-free, waterproof, for precision work

MATERIAL PVC (Vinyl)
THICKNESS 0,08 mm
COLOUR Transparent
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 240 mm
BOXES PER CARTON 10
PIECES PER BOX 100

AQL 1.5
DISPLAY Box
PROPERTIES Flexible, good fit
PRIMARY ENVIRONMENTS OF USE Microbiological risk environments, disposable use, wet environments, moist environments, dirty environments

**PVC (VINYL)**

Cat. II



EN 374-2

**TEGERA®**

TEGERA® 825

Disposable glove, 0,10 mm PVC (Vinyl), non powder, Cat. II, waterproof, for precision work

MATERIAL PVC (Vinyl)
THICKNESS 0,10 mm
INSIDE Non powder
COLOUR Transparent
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 240 mm
BOXES PER CARTON 10

PIECES PER BOX 100
AQL 1.5
DISPLAY Box
PROPERTIES Flexible
PRIMARY ENVIRONMENTS OF USE
Microbiological risk environments, wet environments, moist environments, dirty environments

**PVC (VINYL)****TEGERA®****TEGERA® 817**

Disposable glove, 0,08 mm PVC (Vinyl), phthalate-free, non powder, Cat. II, phthalate-free, latex-free, for precision work

MATERIAL PVC (Vinyl), phthalate-free
THICKNESS 0,08 mm
INSIDE Non powder
COLOUR Transparent
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 240 mm
BOXES PER CARTON 10
PIECES PER BOX 100


AQL 1.5
DISPLAY Box
FEATURES Approved for handling foodstuffs, phthalate-free
PROPERTIES Flexible
PRIMARY ENVIRONMENTS OF USE
Microbiological risk environments, disposable use, wet environments, moist environments, dirty environments

**PVC (VINYL)****TEGERA®****TEGERA® 555**

Disposable glove, 0,02 mm PE, structured, Cat. I, waterproof, for precision work

MATERIAL PE
THICKNESS 0,02 mm
GRIP PATTERN Structured
COLOUR Transparent
SIZE RANGE 8, 10
LENGTH RANGE 300 mm

PIECES PER BAG 100
BAGS PER CARTON 80
DISPLAY Bag
FEATURES Approved for handling foodstuffs
PRIMARY ENVIRONMENTS OF USE Disposable use, moist environments, dirty environments

**PE****TEGERA®**

TEGERA® 558

Disposable glove, 0,02 mm PE, structured, Cat. I, waterproof, for precision work

MATERIAL PE

THICKNESS 0,02 mm

GRIP PATTERN Structured

COLOUR Transparent

LENGTH RANGE 300 mm

BOXES PER CARTON 5

PIECES PER BOX 50

DISPLAY Hangtag with euro slot

FEATURES Approved for handling foodstuffs

PRIMARY ENVIRONMENTS OF USE Disposable
use, moist environments



Cat. I

EN 420

Council Directive
89/686/EEC
(PPE Directive)



TEGERA®



MEDIUM WEIGHT

You need hardwearing gloves in a durable material. At the same time, they must be supple and comfortable to wear.

DISPOSABLE AND/OR CHEMICAL RESISTANT GLOVES / MEDIUM WEIGHT

TEGERA® 18602


Chemical protection glove, 0,28 mm nitrile, seamless, nylon, diamond grip pattern, Cat. III, latex-free, for allround work

LINER MATERIAL Seamless, nylon
MATERIAL Nitrile
THICKNESS 0,28 mm
GRIP PATTERN Diamond grip pattern
COLOUR Green
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 350 mm
PAIRS PER PACKAGE/CARTON 6/60
AQL 0.65
DISPLAY Bag

FEATURES Protection against chemicals, approved for handling foodstuffs, oil and grease resistant
PROPERTIES High level of protection, extra flexible, durable, good grip, extra comfortable
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, wet environments, oil and greasy environments, dirty environments, harsh environments



NITRILE



TEGERA®

TEGERA® 18603

Chemical protection glove, 0,38 mm nitrile, seamless, nylon, diamond grip pattern, Cat. III, latex-free, for allround work

LINER MATERIAL Seamless, nylon
MATERIAL Nitrile
THICKNESS 0,38 mm
GRIP PATTERN Diamond grip pattern
COLOUR Green
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 350 mm
PAIRS PER PACKAGE/CARTON 6/60
AQL 0.65
DISPLAY Bag

FEATURES Protection against chemicals, approved for handling foodstuffs, latex-free, oil and grease resistant
PROPERTIES High level of protection, extra flexible, durable, good grip, extra comfortable
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, wet environments, moist environments, oil and greasy environments, dirty environments



NITRILE



TEGERA®

TEGERA® 18601

Chemical protection glove, 0,38 mm nitrile, diamond grip pattern, flock-lined, Cat. III, latex-free, oil and grease resistant, for allround work

MATERIAL Nitrile
THICKNESS 0,38 mm
INSIDE Flock-lined
GRIP PATTERN Diamond grip pattern
COLOUR Green
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 330 mm
PAIRS PER PACKAGE/CARTON 12/144
AQL 0,65


FEATURES Protection against chemicals, approved for handling foodstuffs, latex-free, pre-curved fingers
PROPERTIES Flexible, durable, good grip, good fit, comfortable
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, wet environments, moist environments, oil and greasy environments, dirty environments

**NITRILE****TEGERA®****TEGERA® 186**

Chemical protection glove, 0,38 mm nitrile, diamond grip pattern, flock-lined, Cat. III, latex-free, for allround work

MATERIAL Nitrile
THICKNESS 0,38 mm
INSIDE Flock-lined
GRIP PATTERN Diamond grip pattern
COLOUR Green
SIZE RANGE 7, 8, 9, 10, 11, 12
LENGTH RANGE 310 mm
PAIRS PER PACKAGE/CARTON 10/100
AQL 0,65


DISPLAY Bag with euro slot
FEATURES Protection against chemicals, approved for handling foodstuffs, latex-free, oil and grease resistant
PROPERTIES High level of protection, flexible, comfortable
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, wet environments, oil and greasy environments, dirty environments, harsh environments

**NITRILE****TEGERA®****TEGERA® 187**

Chemical protection glove, 0,38 mm nitrile, diamond grip pattern, unflocked, Cat. III, latex-free, for allround work

MATERIAL Nitrile
THICKNESS 0,38 mm
INSIDE Unflocked
GRIP PATTERN Diamond grip pattern
COLOUR Green
SIZE RANGE 7, 8, 9, 10, 11, 12
LENGTH RANGE 310 mm
PAIRS PER PACKAGE/CARTON 10/100

AQL 0,65
DISPLAY Bag with euro slot
FEATURES Protection against chemicals
PROPERTIES Flexible, good grip, good fit
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, wet environments, dirty environments


**NITRILE****TEGERA®**

TEGERA® 47**NITRILE**

Chemical protection glove, 0,45 mm nitrile, diamond grip pattern, flock-lined, Cat. III, latex-free, for allround work

MATERIAL Nitrile
THICKNESS 0,45 mm
INSIDE Flock-lined
GRIP PATTERN Diamond grip pattern
COLOUR Green
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 330 mm
PAIRS PER PACKAGE/CARTON 10/100
AQL 0.65


DISPLAY Bag with euro slot
FEATURES Protection against chemicals, approved for handling foodstuffs, latex-free
PROPERTIES Highest level of protection, very durable, good grip, good fit, comfortable
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, dirty environments, harsh environments

**TEGERA®****TEGERA® 48****NITRILE**

Chemical protection glove, 0,60 mm nitrile, diamond grip pattern, unflocked, Cat. III, extra long, latex-free, for allround work

MATERIAL Nitrile
THICKNESS 0,60 mm
INSIDE Unflocked
GRIP PATTERN Diamond grip pattern
COLOUR Green
SIZE RANGE 8, 9, 10, 11
LENGTH RANGE 450 mm
PAIRS PER PACKAGE/CARTON 6/36
AQL 0.65
DISPLAY Bag


FEATURES Protection against chemicals, approved for handling foodstuffs, extra long, latex-free
PROPERTIES Highest level of protection, very durable, good grip, good fit, comfortable
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, wet environments, moist environments, oil and greasy environments, dirty environments, harsh environments

**TEGERA®****TEGERA® 183****NITRILE**

Chemical protection glove, 0,38 mm nitrile, diamond grip pattern, flock-lined, Cat. III, for allround work

MATERIAL Nitrile
THICKNESS 0,38 mm
INSIDE Flock-lined
GRIP PATTERN Diamond grip pattern
COLOUR Blue
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 310 mm
PAIRS PER PACKAGE/CARTON 10/100
AQL 0.65

DISPLAY Bag with euro slot
FEATURES Protection against chemicals, approved for handling foodstuffs, latex-free
PROPERTIES Flexible, durable, good fit, comfortable
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, wet environments, moist environments, oil and greasy environments, harsh environments

**TEGERA®**

TEGERA® 7351

Chemical protection glove, nitrile, fully dipped, interlock, cotton, sandy finish, Cat. III, latex-free, for allround work

LINER MATERIAL Interlock, cotton
DIPPING Fully dipped
DIPPING MATERIAL Nitrile
GRIP PATTERN Sandy finish
COLOUR Blue
SIZE RANGE 7, 8, 9, 10, 11, 12
LENGTH RANGE 300 mm
PAIRS PER PACKAGE/CARTON 10/120
AQL 1.5
DISPLAY Bag with euro slot

FEATURES Protection against chemicals, approved for handling foodstuffs, latex-free, oil and grease resistant, water and oil repellent
PROPERTIES Durable, good grip, good fit, comfortable
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, cold environments, wet environments, moist environments, oil and greasy environments, dirty environments, harsh environments

**NITRILE****TEGERA®****TEGERA® 7350**

Chemical protection glove, winter-lined, nitrile, sandy finish, fleece, Cat. III, oil and grease resistant, for allround work

DIPPING MATERIAL Nitrile
LINING Winter-lined
LINING MATERIAL Fleece
GRIP PATTERN Sandy finish
COLOUR Blue
SIZE RANGE 8, 9, 10, 11
LENGTH RANGE 300 mm
PAIRS PER PACKAGE/CARTON 5/60
AQL 1.5
DISPLAY Bag with euro slot


FEATURES Protection against chemicals, approved for handling foodstuffs, latex-free, oil and grease resistant
PROPERTIES High level of protection, durable, good grip, good fit, warm
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, cold environments, wet environments, moist environments, oil and greasy environments, dirty environments

**NITRILE****TEGERA®****TEGERA® 81000**

Chemical protection glove, 0,80 mm latex, diamond grip pattern, flock-lined, Cat. III, waterproof

MATERIAL Latex
THICKNESS 0,80 mm
INSIDE Flock-lined
GRIP PATTERN Diamond grip pattern
COLOUR Black
SIZE RANGE 6,5, 7,5, 8,5, 9,5, 10,5
LENGTH RANGE 300 mm
PAIRS PER PACKAGE/CARTON 6/60

AQL 1.5
DISPLAY Bulk pack
FEATURES Protection against chemicals
PROPERTIES High level of protection, flexible, durable, good grip, good fit, comfortable
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, environments hazardous to health, corrosive environments, wet environments, dirty environments

**LATEX****TEGERA®**

LATEX

TEGERA® 8150

Chemical protection glove, 0,40 mm latex, diamond grip pattern, flock-lined, Cat. III, approved for handling foodstuffs, waterproof

MATERIAL Latex
THICKNESS 0,40 mm
INSIDE Flock-lined
GRIP PATTERN Diamond grip pattern
COLOUR Yellow
SIZE RANGE 7, 8, 9, 10
LENGTH RANGE 300 mm
PAIRS PER PACKAGE/CARTON 10/100

AQL 0.65
DISPLAY Bag with euro slot
FEATURES Splash protection against chemicals, approved for handling foodstuffs
PROPERTIES Flexible, good grip, good fit, comfortable
PRIMARY ENVIRONMENTS OF USE Wet environments, moist environments, dirty environments



TEGERA®

TEGERA® 8140


Chemical protection glove, 0,38 mm latex, diamond grip pattern, flock-lined, Cat. III, for allround work

MATERIAL Latex
THICKNESS 0,38 mm
INSIDE Flock-lined
GRIP PATTERN Diamond grip pattern
COLOUR Blue
SIZE RANGE 6, 7, 8, 9, 10
LENGTH RANGE 300 mm
PAIRS PER PACKAGE/CARTON 12/144

AQL 1.5
DISPLAY Bag with euro slot
FEATURES Splash protection against chemicals
PROPERTIES Extra flexible, good fit, comfortable
PRIMARY ENVIRONMENTS OF USE Wet environments, moist environments, dirty environments



LATEX



TEGERA®

TEGERA® 231


Chemical protection glove, 0,67 mm latex/neoprene, diamond grip pattern, flock-lined, Cat. III, for allround work

MATERIAL Latex/neoprene
THICKNESS 0,67 mm
INSIDE Flock-lined
GRIP PATTERN Diamond grip pattern
COLOUR Orange
SIZE RANGE 7, 8, 9, 10, 11, 12
LENGTH RANGE 320 mm
PAIRS PER PACKAGE/CARTON 12/144
AQL 0.65

FEATURES Protection against chemicals, approved for handling foodstuffs
PROPERTIES High level of protection, flexible, very durable, good grip, good fit
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, wet environments, moist environments, dirty environments, harsh environments



LATEX/NEOPRENE




TEGERA®

TEGERA® 230

Chemical protection glove, 0,67 mm latex, neoprene, diamond grip pattern, flock-lined, Cat. III, for allround work

MATERIAL Latex, neoprene
THICKNESS 0,67 mm
INSIDE Flock-lined
GRIP PATTERN Diamond grip pattern
COLOUR Blue, yellow
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 320 mm
PAIRS PER PACKAGE/CARTON 12/144


AQL 0.65
FEATURES Protection against chemicals, approved for handling foodstuffs
PROPERTIES Flexible, durable, good fit
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, wet environments, moist environments, dirty environments, harsh environments

LATEX, NEOPRENE**TEGERA®****TEGERA® 241**

Chemical protection glove, 0,68 mm latex/neoprene, diamond grip pattern, flock-lined, Cat. III, extra long, for allround work

MATERIAL Latex/neoprene
THICKNESS 0,68 mm
INSIDE Flock-lined
GRIP PATTERN Diamond grip pattern
COLOUR Black
SIZE RANGE 8, 9, 10, 11
LENGTH RANGE 410 mm
PAIRS PER PACKAGE/CARTON 6/60
AQL 0.65

DISPLAY Bag
FEATURES Protection against chemicals, approved for handling foodstuffs, extra long
PROPERTIES Very durable, good grip, good fit
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, moist environments, dirty environments, harsh environments

LATEX/NEOPRENE**TEGERA®****TEGERA® 8160**

Synthetic glove, 1,10 mm latex, fully dipped, double-dipped, interlock, foam grip pattern, Cat. II, waterproof, for allround work

LINER MATERIAL Interlock
DIPPING Fully dipped, double-dipped
DIPPING MATERIAL Latex
THICKNESS 1,10 mm
GRIP PATTERN Foam grip pattern
COLOUR Blue
SIZE RANGE 6, 7, 8, 9, 10, 11
LENGTH RANGE 300 mm

PAIRS PER PACKAGE/CARTON 12/120
DISPLAY Bag with euro slot
PROPERTIES High level of protection, flexible, good grip, comfortable, warm
PRIMARY ENVIRONMENTS OF USE Cold environments, warm environments, wet environments, moist environments, dirty environments

LATEX**TEGERA®**

LATEX

TEGERA® 8145

Synthetic glove, 0,33 mm latex, diamond grip pattern, flock-lined, Cat. I, waterproof, for allround work

MATERIAL Latex
THICKNESS 0,33 mm
INSIDE Flock-lined
GRIP PATTERN Diamond grip pattern
COLOUR Yellow
SIZE RANGE 7, 8, 9, 10
LENGTH RANGE 300 mm
PAIRS PER PACKAGE/CARTON 10/100

DISPLAY Bag with euro slot
FEATURES Approved for handling foodstuffs, waterproof, elastic
PROPERTIES Extra flexible, good grip, comfortable
PRIMARY ENVIRONMENTS OF USE Wet environments, moist environments, dirty environments



Cat. I

EN 420

Council Directive
89/686/EEC
(PPE Directive)
 **TEGERA®**
TEGERA® 8190

Chemical protection glove, 0,28 mm PVC (Vinyl), phthalate-free, smooth finish, unflocked, Cat. III, phthalate-free, for allround work

MATERIAL PVC (Vinyl), phthalate-free
THICKNESS 0,28 mm
INSIDE Unflocked
GRIP PATTERN Smooth finish
COLOUR White
SIZE RANGE 7, 8, 9, 10
LENGTH RANGE 310 mm

PAIRS PER PACKAGE/CARTON 10/100
AQL 1.5
DISPLAY Bag with euro slot
FEATURES Phthalate-free
PROPERTIES Flexible, good fit, comfortable
PRIMARY ENVIRONMENTS OF USE Wet environments, moist environments, dirty environments



PVC (VINYL)



Cat. III

EN 388
2000

EN 374-2



EN 374-3


 **TEGERA®**
TEGERA® 8180

Chemical protection glove, 0,45 mm PVC (Vinyl), phthalate-free, diamond grip pattern, flock-lined, Cat. III, phthalate-free, for allround work

MATERIAL PVC (Vinyl), phthalate-free
THICKNESS 0,45 mm
INSIDE Flock-lined
GRIP PATTERN Diamond grip pattern
COLOUR Blue
SIZE RANGE 7, 8, 9, 10
LENGTH RANGE 310 mm
PAIRS PER PACKAGE/CARTON 10/100
AQL 1.5

DISPLAY Bag with euro slot
FEATURES Splash protection against chemicals, phthalate-free
PROPERTIES Extra flexible, durable, good fit, extra comfortable
PRIMARY ENVIRONMENTS OF USE Microbiological risk environments, wet environments, moist environments, dirty environments



PVC (VINYL)



Cat. III

EN 388
2000

EN 374-2



EN 374-3


 **TEGERA®**

TEGERA® 8170

Chemical protection glove, 0,55 mm PVC (Vinyl), phthalate-free, diamond grip pattern, flock-lined, Cat. III, for allround work

MATERIAL PVC (Vinyl), phthalate-free
THICKNESS 0,55 mm
INSIDE Flock-lined
GRIP PATTERN Diamond grip pattern
COLOUR Red
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 310 mm
PAIRS PER PACKAGE/CARTON 25/100
AQL 1.5

DISPLAY Bag with euro slot
FEATURES Splash protection against chemicals, phthalate-free
PROPERTIES Flexible, durable, good grip, extra comfortable
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, wet environments, moist environments, dirty environments

**PVC (VINYL)****TEGERA®****TEGERA® 8195**

Chemical protection glove, 0,65 mm PVC (Vinyl), phthalate-free, diamond grip pattern, flock-lined, Cat. III, for allround work

MATERIAL PVC (Vinyl), phthalate-free
THICKNESS 0,65 mm
INSIDE Flock-lined
GRIP PATTERN Diamond grip pattern
COLOUR Black
SIZE RANGE 8, 9, 10
LENGTH RANGE 310 mm
PAIRS PER PACKAGE/CARTON 25/100
AQL 1.5

DISPLAY Bag with euro slot
FEATURES Splash protection against chemicals, phthalate-free
PROPERTIES Flexible, durable, good grip, extra comfortable
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, wet environments, moist environments, harsh environments

**PVC (VINYL)****TEGERA®****TEGERA® 8175**

Chemical protection glove, 0,55 mm PVC (Vinyl), phthalate-free, diamond grip pattern, flock-lined, Cat. III

MATERIAL PVC (Vinyl), phthalate-free
THICKNESS 0,55 mm
INSIDE Flock-lined
GRIP PATTERN Diamond grip pattern
COLOUR Red
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 700 mm
PAIRS PER PACKAGE/CARTON 25/100
AQL 1.5

DISPLAY Bag with euro slot
FEATURES Splash protection against chemicals, extra long, phthalate-free, sleeve protection
PROPERTIES High level of protection, flexible, durable, good grip, good fit, comfortable
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, wet environments, moist environments, dirty environments

**PVC (VINYL)****TEGERA®**

HEAVY WEIGHT

You work with rough materials so you need gloves made from strong, hardwearing materials.

DISPOSABLE AND/OR CHEMICAL RESISTANT GLOVES / HEAVY WEIGHT

772

Chemical protection glove, nitrile, fully dipped, interlock, sandy finish, Cat. III, extra long, for heavy work

LINER MATERIAL Interlock
DIPPING Fully dipped
DIPPING MATERIAL Nitrile
GRIP PATTERN Sandy finish
COLOUR Yellow
SIZE RANGE 8, 9, 10
LENGTH RANGE 600 mm
PAIRS PER PACKAGE/CARTON 5/60

AQL 1.5
DISPLAY Bag with euro slot
FEATURES Protection against chemicals
PROPERTIES Durable, good grip
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, wet environments, moist environments, oil and greasy environments, dirty environments, harsh environments



NITRILE



TEGERA® 13000

Chemical protection glove, PVC (Vinyl), seamless, cotton, 13 gg, sandy finish, Cat. III, oil and grease resistant, for heavy work

LINER MATERIAL Seamless, cotton, 13 gg
DIPPING MATERIAL PVC (Vinyl)
GRIP PATTERN Sandy finish
COLOUR Black
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 300 mm
PAIRS PER PACKAGE/CARTON 10/120
AQL 0.65

FEATURES Protection against chemicals, pre-curved fingers
PROPERTIES Very durable, good grip, good fit, comfortable
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, wet environments, moist environments, oil and greasy environments, dirty environments



PVC (VINYL)



TEGERA®

TEGERA® 10PG

Chemical protection glove, PVC (Vinyl), interlock, cotton, smooth finish, Cat. III, oil and grease resistant, for heavy work

LINER MATERIAL Interlock, cotton
DIPPING MATERIAL PVC (Vinyl)
GRIP PATTERN Smooth finish
COLOUR Red
SIZE RANGE 8, 9, 10, 11
LENGTH RANGE 350 mm
PAIRS PER PACKAGE/CARTON 12/60
AQL 0.65

FEATURES Protection against chemicals
PROPERTIES Very durable
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, wet environments, moist environments, oil and greasy environments, harsh environments



PVC (VINYL)


 **TEGERA®**
TEGERA® 12930

Chemical protection glove, PVC (Vinyl), seamless, nylon, granulated, Cat. III, oil and grease resistant, for heavy work

LINER MATERIAL Seamless, nylon
DIPPING MATERIAL PVC (Vinyl)
GRIP PATTERN Granulated
COLOUR Blue, black
SIZE RANGE 8, 9, 10, 11
LENGTH RANGE 300 mm
PAIRS PER PACKAGE/CARTON 12/72
AQL 0.65

FEATURES Protection against chemicals, pre-curved fingers
PROPERTIES Highest level of protection, very durable, excellent grip, perfect fit, extra comfortable
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, wet environments, moist environments, oil and greasy environments, dirty environments



PVC (VINYL)


 **TEGERA®**
TEGERA® 12935

Chemical protection glove, PVC (Vinyl), seamless, nylon, granulated, Cat. III, for heavy work

LINER MATERIAL Seamless, nylon
DIPPING MATERIAL PVC (Vinyl)
GRIP PATTERN Granulated
COLOUR Blue, black
SIZE RANGE 8, 9, 10, 11
LENGTH RANGE 350 mm
PAIRS PER PACKAGE/CARTON 12/72
AQL 0.65

FEATURES Protection against chemicals, pre-curved fingers
PROPERTIES Highest level of protection, flexible, very durable, excellent grip, perfect fit, extra comfortable
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, wet environments, moist environments, oil and greasy environments, dirty environments, harsh environments



PVC (VINYL)


 **TEGERA®**

TEGERA® 12945

Chemical protection glove, PVC (Vinyl), seamless, nylon, granulated, Cat. III, extra long, for heavy work

LINER MATERIAL Seamless, nylon
DIPPING MATERIAL PVC (Vinyl)
GRIP PATTERN Granulated
COLOUR Blue, black
SIZE RANGE 8, 9, 10, 11
LENGTH RANGE 450 mm
PAIRS PER PACKAGE/CARTON 12/72
AQL 0.65

FEATURES Protection against chemicals, extra long, pre-curved fingers
PROPERTIES Highest level of protection, very durable, perfect fit, extra comfortable
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, wet environments, moist environments, oil and greasy environments, dirty environments

**PVC (VINYL)**

Cat. III

EN 388
4131

EN 374-2

EN 374-3
AKL**TEGERA®****TEGERA® 12910**

Chemical protection glove, PVC (Vinyl), seamless, cotton, sandy finish, Cat. III, extra long, for heavy work

LINER MATERIAL Seamless, cotton
MATERIAL PVC (Vinyl)
GRIP PATTERN Sandy finish
COLOUR Blue
SIZE RANGE 7, 8, 9, 10, 11
LENGTH RANGE 700 mm
PAIRS PER PACKAGE/CARTON 6/60
AQL 0.65

FEATURES Protection against chemicals, extra long
PROPERTIES Highest level of protection, very durable, good fit
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, wet environments, moist environments, oil and greasy environments, dirty environments

**PVC (VINYL)**

Cat. III

EN 388
4121

EN 374-2

EN 374-3
AJKL**TEGERA®****TEGERA® 7390**

Chemical protection glove, winter-lined, PVC (Vinyl), fully dipped, acrylic, sandy finish, fleece, Cat. III, for heavy work

LINER MATERIAL Acrylic
DIPPING Fully dipped
DIPPING MATERIAL PVC (Vinyl)
LINING Winter-lined
LINING MATERIAL Fleece
GRIP PATTERN Sandy finish
COLOUR Blue
SIZE RANGE 9, 10
LENGTH RANGE 300 mm

PAIRS PER PACKAGE/CARTON 6/36
AQL 0.65
DISPLAY Bag
PROPERTIES Flexible, very durable, good grip, good fit, comfortable, warm
PRIMARY ENVIRONMENTS OF USE Chemical risk environments, environments hazardous to health, corrosive environments, outdoors, moist environments, oil and greasy environments, dirty environments, harsh environments

**PVC (VINYL)**

Cat. III

EN 388
4131EN 511
121

EN 374-2

EN 374-3
JKL**TEGERA®**

TEGERA® 494

Chemical protection glove, winter-lined, neoprene, crinkled grip pattern, Cat. III, withstands contact heat up to 500°C, extra long, latex-free, for heavy work

DIPPING MATERIAL Neoprene

LINING Winter-lined

GRIP PATTERN Crinkled grip pattern

COLOUR Black

SIZE RANGE 10

LENGTH RANGE 450 mm

PAIRS PER PACKAGE/CARTON 6/60

AQL 0.65

DISPLAY Bag

FEATURES Protection against chemicals, withstands contact heat up to 500°C, extra long, latex-free

PROPERTIES Very durable, good grip, warm

PRIMARY ENVIRONMENTS OF USE Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, cold environments, warm environments, moist environments, dirty environments, harsh environments

**NEOPRENE**

Cat. III

EN 388
3121EN 407
44XXXXEN 511
021

EN 374-2

EN 374-3
AJKL**TEGERA®**

ALPHANUMERIC INDEX

Product	Page	Product	Page	Product	Page
8 TEGERA®	120	187 TEGERA®	145	484 TEGERA®	121
10PG TEGERA®	153	189 TEGERA®	65	494 TEGERA®	118, 123, 155
10 TEGERA®	115	191 TEGERA®	112	515 TEGERA®	38
11CVa TEGERA®	125	198 TEGERA®	76	517 TEGERA®	104
12 TEGERA®	41	215 TEGERA®	90	555 TEGERA®	142
13 TEGERA®	41	217 TEGERA®	105	558 TEGERA®	143
14 TEGERA®	42	230 TEGERA®	149	585 TEGERA®	129
17 TEGERA®	122	231 TEGERA®	148	595 TEGERA®	112
19 TEGERA®	129	235 TEGERA®	105	614 TEGERA®	70
30 TEGERA®	84	241 TEGERA®	149	617 TEGERA®	69
32 TEGERA®	120	246 TEGERA®	64	618 TEGERA®	69
35 TEGERA®	76	255 TEGERA®	90	629 TEGERA®	95
47 TEGERA®	146	290 TEGERA®	65	630 TEGERA®	72
48 TEGERA®	146	293 TEGERA®	110	640 TEGERA®	62
50 TEGERA®	76	294 TEGERA®	61	666 TEGERA®	94
51 TEGERA®	77	295 TEGERA®	111	671 TEGERA®	61
52 TEGERA®	64	296 TEGERA®	113	680 TEGERA®	63
55 TEGERA®	75	297 TEGERA®	112	682 TEGERA®	118
56 TEGERA®	116	298 TEGERA®	116	683 TEGERA®	117
57 TEGERA®	116	299 TEGERA®	113	684 TEGERA®	113
89 TEGERA®	64	310 TEGERA®	53	690 TEGERA®	63
93 TEGERA®	98	311 TEGERA®	51	721 TEGERA®	67
95 TEGERA®	99	312 TEGERA®	51	722 TEGERA®	67
98 TEGERA®	99	319 TEGERA®	71	723 TEGERA®	68
103 TEGERA®	75	320 TEGERA®	37	728 TEGERA®	43
106 TEGERA®	75	321 TEGERA®	38	737 TEGERA®	43
113 TEGERA®	42	322 TEGERA®	104	747 TEGERA®	69
114 TEGERA®	39	325 TEGERA®	37	772	152
115 TEGERA®	39	326 TEGERA®	59	790 TEGERA®	114
116 TEGERA®	40	335 TEGERA®	106	795 TEGERA®	114
117 TEGERA®	105	340 TEGERA®	40	805 TEGERA®	85
118a TEGERA®	128	360 TEGERA®	62	810 TEGERA®	85
124 TEGERA®	41	363 TEGERA®	74	811 TEGERA®	85
126a TEGERA®	125	377 TEGERA®	117	817 TEGERA®	142
130a TEGERA®	126	414 TEGERA®	59	819 TEGERA®	141
132a TEGERA®	92, 127	417 TEGERA®	110	825 TEGERA®	142
134 TEGERA®	127	430 TEGERA®	89	833 TEGERA®	140
139 TEGERA®	121	437 TEGERA®	111	836 TEGERA®	141
169 TEGERA®	121	447 TEGERA®	111	837 TEGERA®	141
183 TEGERA®	146	450 TEGERA®	94	843 TEGERA®	139
184 TEGERA®	140	455 TEGERA®	92	846 TEGERA®	139
186 TEGERA®	145	464 TEGERA®	122	848 TEGERA®	139

ALPHANUMERIC INDEX

Product	Page	Product	Page	Product	Page
849 TEGERA®	140	980 TEGERA®	93	9123 TEGERA®	55
850 TEGERA®	48	981 TEGERA®	93	9124 TEGERA®	56
855 TEGERA®	48	983 TEGERA®	91	9125 TEGERA®	58
858 TEGERA®	137	990 TEGERA®	88	9126 TEGERA®	108
860 TEGERA®	49	991 TEGERA®	92	9127 TEGERA®	107
861 TEGERA®	49	991wht TEGERA®	93	9128 TEGERA®	107
866 TEGERA®	49	992 TEGERA®	95	9140 TEGERA®	36
867 TEGERA®	50	993 TEGERA®	91	9161 TEGERA®	58
868 TEGERA®	50	2207 TEGERA®	68	9164 TEGERA®	115
873 TEGERA®	45	2805 TEGERA®	68	9180 TEGERA®	79
874 TEGERA®	45	2807 TEGERA®	70	9181 TEGERA®	80
875 TEGERA®	46	2809 TEGERA®	94	9182 TEGERA®	80
880 TEGERA®	50	4635 TEGERA®	73	9185 TEGERA®	80
881 TEGERA®	44	5114 TEGERA®	37	9190 TEGERA®	81, 109
882 TEGERA®	46	6281 TEGERA®	117	9195 TEGERA®	81
883 TEGERA®	44	6751 TEGERA®	62	9196 TEGERA®	82
884 TEGERA®	45	7350 TEGERA®	114, 147	9200 TEGERA®	58
886 TEGERA®	46	7351 TEGERA®	147	9202 TEGERA®	109
887 TEGERA®	44	7390 TEGERA®	118, 154	9205 TEGERA®	57
888 TEGERA®	63	8120 TEGERA®	52	9220 TEGERA®	36
890 TEGERA®	47	8125 TEGERA®	54	9232 TEGERA®	110
891 TEGERA®	48	8127 TEGERA®	54	9295 TEGERA®	82
894 TEGERA®	47	8128 TEGERA®	54	9900 TEGERA®	56
896 TEGERA®	47	8140 TEGERA®	148	9901 TEGERA®	57
899 TEGERA®	89	8145 TEGERA®	150	9902 TEGERA®	57
901 TEGERA®	40	8150 TEGERA®	148	10990 TEGERA®	89
909 TEGERA®	88	8160 TEGERA®	149	10991 TEGERA®	90
910 TEGERA®	95	8170 TEGERA®	151	12910 TEGERA®	154
911 TEGERA®	72	8175 TEGERA®	151	12930 TEGERA®	153
915 TEGERA®	71	8180 TEGERA®	150	12935 TEGERA®	153
919 TEGERA®	53	8190 TEGERA®	150	12945 TEGERA®	154
921 TEGERA®	52	8195 TEGERA®	151	13000 TEGERA®	152
922 TEGERA®	72	9100 TEGERA®	35	18601 TEGERA®	145
925 TEGERA®	52	9101 TEGERA®	84	18602 TEGERA®	144
931 TEGERA®	53	9102 TEGERA®	79	18603 TEGERA®	144
940 TEGERA®	66	9105 TEGERA®	36	81000 TEGERA®	147
941 TEGERA®	66	9111 TEGERA®	59	84101 TEGERA®	138
942 TEGERA®	67	9112 TEGERA®	108	84301 TEGERA®	138
950 TEGERA®	96	9113 TEGERA®	109	84501 TEGERA®	138
951 TEGERA®	79	9120 TEGERA®	56	Defend2011 TEGERA®	81
955 TEGERA®	60	9121 TEGERA®	91		
977 TEGERA®	82	9122 TEGERA®	108		



From Sweden to Europe

Ejendals develops, manufactures and markets high-quality products that protect the hands and feet. We design protective gloves and footwear of the highest standard when it comes to protection, durability and ergonomics, in close cooperation with researchers and customers. But we don't just sell high-quality products; we also provide training and safety inspections – providing a complete safety concept to help reduce accidents.

To begin with, our range consisted only of gloves, but in the 1970s we added protective footwear. In 2008 we purchased the Finnish company Urho Viljanmaa Oy which manufactures protective footwear. The Ejendals Group was born. Parts of our production today are located in China. We have kept our research, development and testing facilities in Leksand in Sweden, where the business was started in 1949, and in Finland.

Besides the Nordic countries, Ejendals today has a presence in a number of markets in Europe: Germany, the UK, France, Benelux, Italy, Spain, Poland, the Baltic countries and Russia. And more markets are in the pipeline. The company is still family-owned and is operated today by the founder Valfrid's grandson, Marcus Ejendal. Our annual sales exceed EUR 100 million.



Ejendals' product-development is continuous, thus we reserve the right to changes in the product line. We disclaim all liability for any printing errors that may occur as well as for any limitations of the printing technology used to reproduce the colours in the catalogue/brochure. We work with living, natural materials, so colour and structure variations between products and deliveries may occur.

ejendals
PROTECTING HANDS AND FEET

EXPLANATION OF SYMBOLS, PROTECTIVE GLOVES



EN 388:2003
Protective gloves
against mechanical
risks



EN 407:2004
Protective gloves
against thermal risks
(heat and/or fire)



EN 511:2006
Protective gloves
against cold



EN 374-2:2003
Protective gloves against
chemicals and micro-
organisms - Part 2:
Determination of
resistance to
penetration



EN 374-3:2003
Protective gloves against
chemicals and micro-
organisms - Part 3:
Determination of
resistance to
permeation
by chemicals



EN 374-3:2003
Protective gloves against
chemicals and micro-
organisms - Part 3:
Determination of
resistance to
permeation
by chemicals



EN 374-3:1994
Determination of
resistance to permeation
by chemicals



EN 421:1994
Protective gloves
against radioactive
contamination



EN 381-7:1999
Hand-held chain saw
protective gloves



Suitable for contact
with foodstuffs



NOT FOR
FATTY FOOD
Suitable for contact
with foodstuffs,
except for fatty foods



Information/UIS



Waterproof
membrane



Water repellent



Windproof



Breathable



Cut protection



Warm lining



ESD



Latex



Short model

EN 388:2003 PROTECTIVE GLOVES AGAINST MECHANICAL RISKS



ABCD

A. Resistance to wear The glove material is exposed to wear using grinding paper under pressure. The number of revolutions required to wear a hole in the material is measured. The highest level of protection is 4, which corresponds to 8,000 revolutions.

B. Resistance to cutting The number of revolutions required for a rotating circular knife at constant speed to cut through the glove is measured. The results are compared with a reference material and an index is obtained. The highest level of protection is 5, which corresponds to an index of 20.

C. Tear resistance The resistance to tear is defined as the force necessary to propagate a tear in a rectangular specimen slit half way along its length. The highest level of protection is 4, which corresponds to a force of 75 Newton.

D. Puncturing resistance The amount of force required to puncture a hole in the glove with a nail with specific dimensions and speed (10 cm/min) is measured. The highest level of protection is 4, which corresponds to a force of 150 Newton.

Property	(Maximum Performance)
A) Resistance to wear (No. of revolutions)	(4)
B) Resistance to cutting (Index)	(5)
C) Tear resistance (Newton)	(4)
D) Puncturing resistance (Newton)	(4)

Level of protection	1	2	3	4	5
A) Resistance to wear (No. of revolutions)	100	500	2000	8000	
B) Resistance to cutting (Index)	1,2	2,5	5,0	10,0	20,0
C) Tear resistance (Newton)	10	25	50	75	
D) Puncturing resistance (Newton)	20	60	100	150	



RETAILER

SP-139



EJENDALS AB

Box 7, SE-793 21 Leksand, Sweden

Phone +46 (0) 247 360 00

Fax +46 (0) 247 360 91

info@ejendals.com

order@ejendals.com

www.ejendals.com