

THE POWER OF PERFORMANCE



SAFETY SHOES & WORKWEAR

2025/S2 CATALOGUE / ENG





THE POWER OF PERFORMANCE

THE SAFETY SHOE THAT MAKES YOU FEEL BETTER.

((EN ISO 20345:2022


SPARCOTEAMWORK.COM

SAFETY AND TECHNOLOGY IN MOTORSPORT AND AT WORK



Sparco Teamwork is the collection of shoes and workwear where safety, lightness and design draw inspiration from the motorsport experience, translating into a work key with the same goal: to guarantee maximum performance.


BEST FORMULA1 TEAMS CHOOSE SPARCO

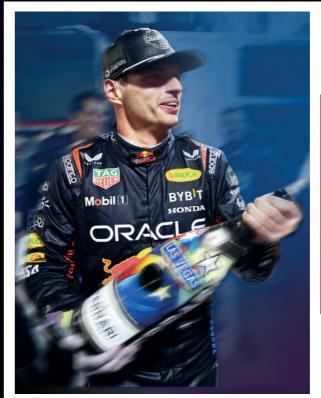







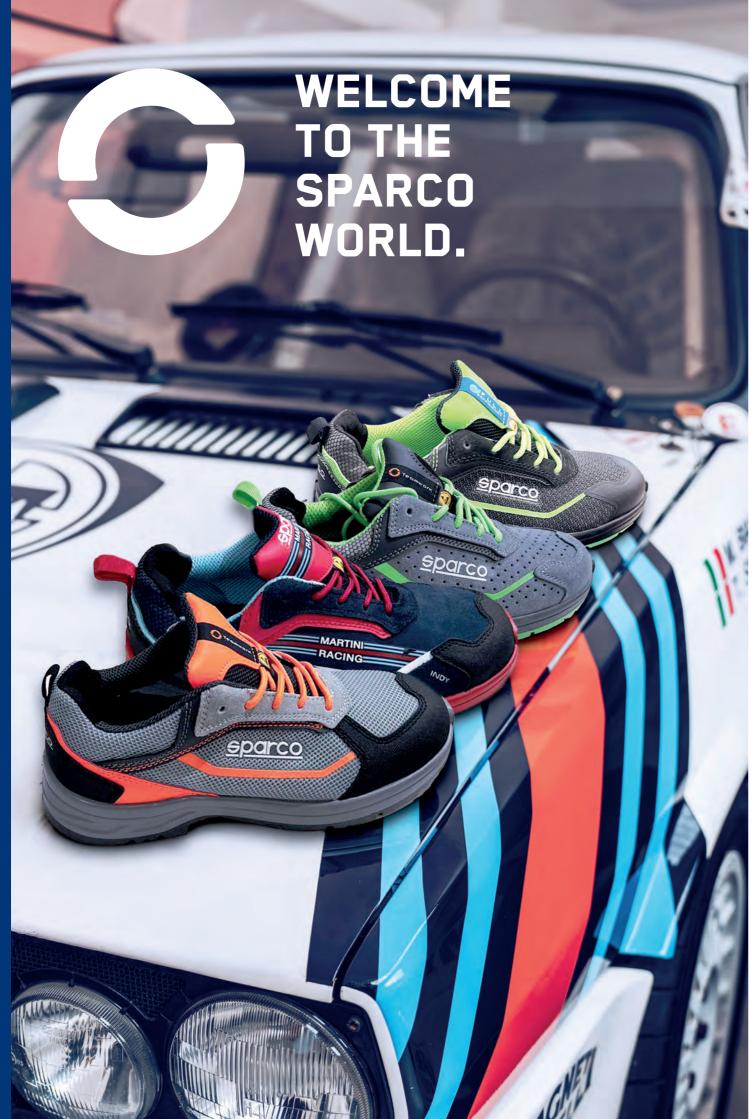


INDEX

SAFETY SHOES AND WORKWEAR







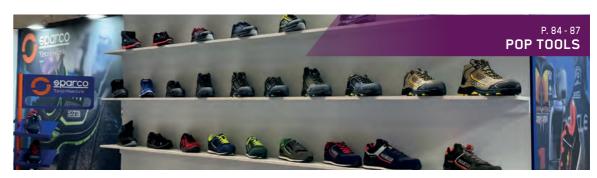



TECHNOLOGY

SPARCO TEAMWORK shoes are developed using the best technologies in terms of soles and midsoles. The aim is to optimize the exertion produced in walking by the forefoot where the greatest stresses for the user are concentrated, thus returning 70% of the energy produced.

This benefit offers advantages in using SPARCO TEAMWORK footwear, such as:

- less fatigue at the end of the day, thus improving reflexes and attention to the dangers of slipping and tripping injuries;
- less exertion in walking;

RETURNED ELASTIC ENERGY

 less strain on the back and spine: muscles relaxation.

TWISTTECH



The specific Zigzag design of the TWIST TECH tread promotes flexion, guaranteeing maximum grip in every situation.

W-FLEX



The w-shaped design of the w-flex tread benefits flexion, Guaranteing maximum grip in any situation.

FLEX*GFIP* (±)



Super light sole in dual density polyurethane with special design of the lugs which guarantee maximum grip in all flexion conditions.

CROSS6517



Ultralight sole with PHYLON midsole and CROSSGRIP rubber tread with lugs that guarantee a strong grip even on particularly uneven surfaces.

MULTI*GSIP*



Ultralight sole with shock absorbing effect provided by a thick ultralight EVA midsole and MULTIGRIP RUBBER tread.

STREETTECH



sole designed to facilitate dynamic use and move safely in all situations.

R-III■ Laminar profiles for greater lipping resistance. Profiles engraved for a better arip on stairs Laminar profile

to increase grip.

Ultralight sole in single-density polyurethane designed for intensive use where the foot bends frequently.





Ultra-resistant PU sole and HRO rubber tread , PRISM-FLE + texture which allows for high grip in all support conditions.





Lightweight dual density polyurethane sole with dynamic drain design to facilitate the outflow of liquids, always guaranteeing maximum grip.

WAVETECH



Superlight sole with phylon midsole and HRO rubber tread. Suitable for any use, even for outdoor leisure.

LINE **TEAMWORK SIPS**

RUNNING STYLE SAFETY FOOTWEAR. SEAMLESS UPPER MADE OF ULTRA-BREATHABLE 3D FABRIC, ANTI-ABRASION TPU REINFORCEMENTS AND 3D HF DETAILS. EVA MIDSOLE AND "FO+HRO" RUBBER TREAD. LIGHTWEIGHT AND SPORTY. TO ENHANCE YOUR DYNAMISM.

THE SUPER COMFORT EVA MIDSOLE PROVIDES AN UNMATCHED CUSHIONING EFFECT, INCREASING THE ELASTIC ENERGY RETURNED AND REDUCING FATIGUE AT THE END OF THE DAY. SPARCO TEAMWORK: THE WORK SHOE THAT MAKES YOU FEEL BETTER.







THE SPECIFIC ZIGZAG DESIGN OF THE TWIST TECH TREAD PROMOTES FLEXION, GUARANTEEING MAXIMUM GRIP IN ANY SITUATION.





DGUV 112-191 COMPLIANT (Optional and interchangeable orthopaedic insocks BY SECOSOL®).

of liquids. 02 Sculpted lugs for greater

03 Segmented profiles to facilitate

01 Segmented profiles for self-cleaning action and profiles the outflow

- slip resistance.
- bending as well as the flow of liquids.
- PS Perforation resistance (min.1100 N & each single value >950 N) non-metal insert: d=3.0mm Conical Nail.
- SR Slip resistance on ceramic tile floor with glycerine.
- **HRO** Contact Heat Resistance (300 °C. for 60").

P. 98

LINFORD ESD S1PS SR FO HRO

07545..NR





(€EN ISO 20345:2022





UPPER:

seamless breathable micro-perforated 3D fabric, anti-abrasion TPU reinforcements and 3D HF details. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU low density with ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass,

insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

super-comfortable EVA midsole, high energy absorption and FO+HRO nitrile rubber tread.

SIZES:

36-48 (UK 3½-13).

ROTOR ESD S1PS SR FO HRO











BTB0019B0K12...

breathable micro-perforated fabric and scratch-resistant microfibre with high abrasion resistance. Closing system with cable and quick release rotor.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation textile fibre (PL).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

single-density PU with energy absorption on the heel.

SIZES:

<u>5</u>°

LINE

TEAMWORK S3S

RUNNING-STYLE SAFETY FOOTWEAR.

SEAMLESS UPPER MADE OF WATER-RESISTANT RIP-STOP FABRIC.

ANTI-ABRASION TPU REINFORCEMENTS AND 3D HF DETAILS.

EVA MIDSOLE AND "FO+HRO" RUBBER TREAD. LIGHTWEIGHT,

VERSATILE AND RESISTANT. THEY ARE READY FOR ANY CHALLENGE.

THE SUPER COMFORT EVA MIDSOLE PROVIDES AN UNMATCHED CUSHIONING EFFECT, INCREASING THE ELASTIC ENERGY RETURNED AND REDUCING FATIGUE AT THE END OF THE DAY. SPARCO TEAMWORK: THE WORK SHOE THAT MAKES YOU FEEL BETTER.



- **01** Segmented profiles for self-cleaning action and profiles the outflow
- 02 Sculpted lugs for greater slip resistance.
- 03 Segmented profiles to facilitate bending as well as the flow of liquids.

THE SPECIFIC ZIGZAG DESIGN OF THE TWIST TECH TREAD PROMOTES FLEXION, GUARANTEEING MAXIMUM GRIP IN ANY SITUATION.



(€EN ISO 20345:2022



DGUV 112-191 COMPLIANT (Optional and interchangeable orthopaedic insocks BY SECOSOL®). PS Perforation resistance (min.1100 N & each single value >950 N) non-metal insert: d=3.0mm Conical Nail.

SR Slip resistance - on ceramic tile floor with glycerine.

HRO Contact Heat Resistance (300 °C. for 60").

P. 98



S3S LINE

PRTÉE EST HRO

LUCAS ESD S3S SR FO HRO

BTB0013B0E54..

seamless water-resistant RIP-STOP fabric, anti-abrasion TPU reinforcements and 3D HF details. Additional 2nd color laces included.

breathable micro-perforated 3D fabric..

REMOVABLE INSOLE:

antistatic PU low density

with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass,

insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

super-comfortable EVA midsole, high energy absorption and FO+HRO nitrile rubber tread.

SIZES:

36-48 (UK 3½-13).

GEORGE ESD S3S SR FO HRO

BTB0013B0N23...









seamless water-resistant RIP-STOP fabric, anti-abrasion TPU reinforcements and 3D HF details.

Additional 2nd color laces included. LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU low density with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

super-comfortable EVA midsole, high energy absorption and FO+HRO nitrile rubber tread.

36-48 (UK 3½-13).

CHRIS ESD S3S SR FO HRO









BTB0013B0K11...

seamless water-resistant RIP-STOP fabric, anti-abrasion TPU reinforcements and 3D HF details. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric..

REMOVABLE INSOLE: antistatic PU low density

with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

super-comfortable EVA midsole, high energy

absorption and FO+HRO nitrile rubber tread.

36-48 (UK 3½-13).

SAFETY SHOES

CAPSULE COLLECTIONS **TEAMWORK**

CAPSULE LINE OF RUNNING-STYLE SAFETY FOOTWEAR WITH OFFICIAL **GULF, MARTINI RACING AND ORACLE RED BULL RACING LIVERIES. SEAMLESS** UPPER IN 3D ULTRA-BREATHABLE OR WATER-REPELLENT RIP-STOP FABRIC, ANTI-ABRASION TPU REINFORCEMENTS AND 3D HF DETAILS. EVA MIDSOLE AND "FO+HRO" RUBBER TREAD, LIGHTWEIGHT AND EXCLUSIVE, FOR THOSE LOOKING FOR UNIQUE STYLE AND PERFORMANCE.

THE SUPER COMFORT EVA MIDSOLE PROVIDES AN UNMATCHED CUSHIONING EFFECT. INCREASING THE ELASTIC ENERGY RETURNED AND REDUCING FATIGUE AT THE END OF THE DAY. SPARCO TEAMWORK: THE WORK SHOE THAT MAKES YOU FEEL BETTER.







01 Segmented profiles for self-cleaning action and profiles the outflow of liquids.

- 02 Sculpted lugs for greater slip resistance.
- 03 Segmented profiles to facilitate bending as well as the flow of liquids.

THE SPECIFIC ZIGZAG DESIGN OF THE TWIST TECH TREAD PROMOTES FLEXION, GUARANTEEING MAXIMUM GRIP IN ANY SITUATION.





DGUV 112-191 COMPLIANT (Optional and interchangeable orthopaedic insocks BY SECOSOL®). PS Perforation resistance (min.1100 N & each single value >950 N) non-metal insert: d=3.0mm Conical Nail.

SR Slip resistance - on ceramic tile floor with glycerine.

HRO Contact Heat Resistance (300 °C. for 60").

P. 98

MILTON ESD S1PS SR FO HRO

(€EN ISO 20345:2022

07545RB..BM

HRO O sparco

seamless breathable micro-perforated 3D fabric, anti-abrasion TPU reinforcements and 3D HF details. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU low density with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

super-comfortable EVA midsole, high energy absorption and FO+HRO nitrile rubber tread.

SIZES:

36-48 (UK 3½-13).

KEYNES ESD S3S SR FO HRO

METAL HRO





BTB0016R0N31...

seamless water-resistant RIP-STOP fabric, anti-abrasion TPU reinforcements and 3D HF details. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU low density

with ergonomic thermoforming. **ANTI-PERFORATION INSOLE:**

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.


ANTI-SLIP ANTI-STATIC SOLE: super-comfortable EVA midsole, high energy

absorption and FO+HRO nitrile rubber tread.

LINE **TRACTION**

SPORTS-STYLE SAFETY FOOTWEAR, COMPLIANT WITH THE NEW EN ISO 20345:2022+A1:2024. REFLECTIVE ANTI-ABRASION FABRIC **UPPER**, EVA MIDSOLE AND "FO+HRO" RUBBER TREAD.

FLEXIBLE, LIGHTWEIGHT AND SPORTY, FOR THOSE LOOKING FOR SAFETY AND PERFORMANCE.

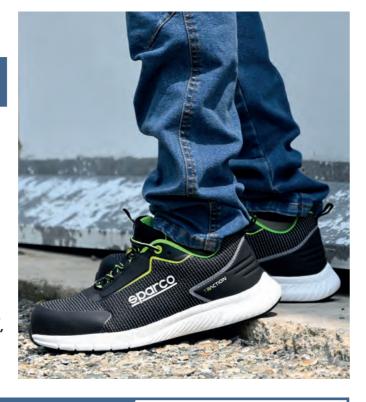



THE W-SHAPED DESIGN OF THE W-FLEX TREAD BENEFITS FLEXION, GUARANTEING MAXIMUM GRIP IN ANY SITUATION.



(€EN ISO 20345:2022+A1:2024

- **01** Sculpted profiles to ensure maximum grip in any conditions.
- 02 Central studs with heel carving for maximum flexibility and grip.
- 03 Specific design of the central W studs to ensure optimal drainage of liquids and greater grip.

PS Perforation resistance (min.1100 N & each single value >950 N) non-metal insert: d=3.0mm Conical Nail.

SR Slip resistance - on ceramic tile floor with glycerine.

HRO Contact Heat Resistance (300 °C. for 60").

P. 98

YUKI ESD S1PS SR FO HRO





NEW

BTB0002B0K35

reflective anti-abrasion fabric, TPU reinforcements and 3D HF details.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU low density with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

TOE CAP:

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

super-comfortable EVA midsole, high energy absorption and FO+HRO nitrile rubber tread.

36-48 (UK 3½-13).

SUZUKA ESD S1PS SR FO HRO







BTB0002B0K05...

reflective anti-abrasion fabric. TPU reinforcements and 3D HF details.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE: antistatic PU low density

with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

TOE CAP:

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

super-comfortable EVA midsole, high energy absorption and FO+HRO nitrile rubber tread.

SIZES:

36-48 (UK 3½-13).

SANYO ESD S1PS SR FO HRO









BTB0002B0K15...

reflective anti-abrasion fabric, TPU reinforcements and 3D HF details.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU low density with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

super-comfortable EVA midsole, high energy absorption and FO+HRO nitrile rubber tread.

SIZES.

36-48 (UK 3½-13).

FUJI ESD S1PS SR FO HRO







BTB0002B0K01...

reflective anti-abrasion fabric, TPU reinforcements and 3D HF details.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU low density

with ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

super-comfortable EVA midsole, high energy absorption and FO+HRO nitrile rubber tread.

SIZES:

LINE TRACTION

SPORTS-STYLE SAFETY FOOTWEAR. COMPLIANT WITH THE NEW EN ISO 20345:2022+A1:2024. REFLECTIVE ANTI-ABRASION FABRIC OR SOFT TUMBLED NUBUCK UPPER, EVA MIDSOLE AND "FO+HRO" RUBBER TREAD. FLEXIBLE, LIGHTWEIGHT AND SPORTY, FOR THOSE LOOKING FOR SAFETY AND PERFORMANCE.



- O1 Sculpted profiles to ensure maximum grip in any conditions.
- 02 Central studs with heel carving for maximum flexibility and grip.
- 03 Specific design of the central W studs to ensure optimal drainage of liquids and greater grip.

THE W-SHAPED DESIGN OF THE W-FLEX TREAD BENEFITS FLEXION, GUARANTEING MAXIMUM GRIP IN ANY SITUATION.



(€EN ISO 20345:2022+A1:2024



- SR Slip resistance on ceramic tile floor with glycerine.
- **HRO** Contact Heat Resistance (300 °C. for 60").

P. 98



TRACTION LINE



BTB0018B0K13...









UPPER:

reflective and water repellent anti-abrasion fabric.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU low density

with ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

super-comfortable EVA midsole, high energy absorption and FO+HRO nitrile rubber tread.

36-48 (UK 3½-13).

TAKUMA ESD S3S SR FO HRO SC

BTB0030B0K30...

water repellent soft tumblednubuck. textured microfibre reinforcements.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU low density

with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

TOE CAP: non magnetic fiberglass,

insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

super-comfortable EVA midsole, high energy absorption and FO+HRO nitrile rubber tread.

36-48 (UK 3½-13).

NAOKI ESD S3S SR FO HRO

BTB0029B0K15









reflective, breathable and water-resistant anti-abrasion fabric. Anti-abrasion TPU inserts with 3D details.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU low density with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

super-comfortable EVA midsole, high energy absorption and FO+HRO nitrile rubber tread.

SIZES:

INDY-R S1PS

SAFETY FOOTWEAR MADE OF ULTRA-BREATHABLE PERFORATED MESH, SUEDE AND MICROFIBER REINFORCEMENTS. "FLEXGRIP+" BI-DENSITY PU SOLE WITH SPECIAL HEEL COMPLIANT WITH THE REQUIREMENTS FOR LADDER GRIP (LG). COMFORTABLE AND ULTRA-BREATHABLE TO ALWAYS WORK EASILY.



- O1 Laminar profile to increase grip for SR test.
- **02** Profiles engraved for a better grip on stairs (LG heelheight > 10 mm).
- **03** Laminar profiles for greater slipping resistance.

"FLEXGRIP+" BI-DENSITY PU SOLE WITH SPECIAL HEEL COMPLIANT WITH THE REQUIREMENTS FOR LADDER GRIP (LG).

SONOMA ESD SIPS SR FO LG



- PS Perforation resistance (min.1100 N & each single value >950 N) non-metal insert: d=3.0mm Conical Nail.
- **SR** Slip resistance on ceramic tile floor with glycerine.
- LG Ladder grip.

P. 98

(€EN ISO 20345:2022





UPPER:

ultra-breathable perforated mesh, suede and microfiber reinforcements. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

 ${\tt zero-perforation\ ultralight\ textile\ fiber\ (PS)}.$

non magnetic fiberglass,

insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption of energy on the heel + LG.

SIZES: 35-48 (UK 2½-13).









07539..GRAF

HDDED

ultra-breathable perforated mesh and microfiber reinforcements. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

TOE CAP

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption of energy on the heel + LG.

SIZES: 35-48 (UK 2½-13).

LINE INDY S1PS

SAFETY FOOTWEAR MADE OF FINE PERFORATED SUEDE LEATHER, "FLEXGRIP+" BI-DENSITY PU SOLE WITH SPECIAL HEEL DESIGN COMPLIANT TO THE REQUIREMENTS FOR LADDER GRIP (LG).

COMFORTABLE AND BREATHABLE TO WORK EASILY EVERYDAY.



"FLEXGRIP+" BI-DENSITY PU SOLE WITH SPECIAL HEEL COMPLIANT WITH THE REQUIREMENTS FOR LADDER GRIP (LG).



METAL ESD

(€EN ISO 20345:2022

DGUV 112-191 COMPLIANT (Optional and interchangeable orthopaedic insocks BY SECOSOL®).

- 01 Laminar profile to increase grip for SR test.
- 02 Profiles engraved for a better grip on stairs (LG - heelheight > 10 mm).
- 03 Laminar profiles for greater slipping resistance.

PS Perforation resistance (min.1100 N & each single value >950 N) non-metal insert: d=3.0mm Conical Nail.

SR Slip resistance - on ceramic tile floor with alycerine.

LG Ladder grip.

P. 98

FELIX ESD S1PS SR FO LG





07538..GRVF

perforated suede and microfiber reinforcements. Additional 2nd color laces included.

LINING.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption of energy on the heel + LG.

35-48 (UK 2½-13).

COLTON ESD S1PS SR FO LG

07538..TAGI

perforated suede and microfiber reinforcements. Additional 2nd color laces included.

LINING.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass,

insulating, resistant to 200J. **ANTI-SLIP ANTI-STATIC SOLE:**

PU dual density with absorption of energy on the heel + LG.

SIZES:

35-48 (UK 2½-13).

TEXAS ESD S1PS SR FO LG













perforated suede and microfiber reinforcements.

Additional 2nd color laces included.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE: antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass,

insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE: PU dual density with absorption

of energy on the heel + LG.

35-48 (UK 2½-13).

DETROIT ESD S1PS SR FO LG

07538..NRGS











perforated suede and microfiber reinforcements. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE: antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass,

insulating, resistant to 200J.


ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption of energy on the heel + LG.

LINE INDY S3S NUBUCK

SAFETY FOOTWEAR MADE OF SOFT TUMBLED NUBUCK, "FLEXGRIP+" BI-DENSITY PU SOLE WITH SPECIAL HEEL DESIGN COMPLIANT TO THE REQUIREMENTS FOR LADDER GRIP (LG).

ELEGANT, SOFT AND RESISTANT, PERFECT IN ANY CONDITION.

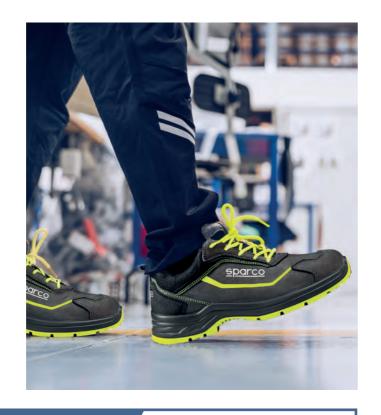

"FLEXGRIP+" BI-DENSITY PU SOLE WITH SPECIAL HEEL COMPLIANT WITH THE REQUIREMENTS FOR LADDER GRIP (LG).



(€EN ISO 20345:2022

- 01 Laminar profile to increase grip for SR test.
- 02 Profiles engraved for a better grip on stairs (LG - heelheight > 10 mm).
- 03 Laminar profiles for greater slipping resistance.

PS Perforation resistance (min.1100 N & each single value >950 N) non-metal insert: d=3.0mm Conical Nail.

SR Slip resistance - on ceramic tile floor with alycerine.

LG Ladder grip.

P. 98

CONOR ESD S3S SR FO LG







07543..GSGF

water repellent nubuck and microfiber reinforcements. Additional 2nd color laces included.

LINING.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming. **ANTI-PERFORATION INSOLE:**

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass,

insulating, resistant to 200J. ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption

of energy on the heel + LG. SIZES:

35-48 (UK 2½-13).

JURI ESD S3S SR FO LG

07544..GSGF



water repellent nubuck and microfiber reinforcements. Specific eyelet for quick release. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

TOE CAP:

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption of energy on the heel + LG.

SIZES:

35-48 (UK 2½-13).

GREGOR ESD S3S SR FO LG









water repellent nubuck and microfiber reinforcements. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

ANTI-PERFORATION INSOLE:

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

of energy on the heel + LG.

07543..NRNR



REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

zero-perforation ultralight textile fiber (PS).

PU dual density with absorption

35-48 (UK 2½-13).

OSCAR ESD S3S SR FO LG

METAL ESD T





07544..NRNR

water repellent nubuck and microfiber reinforcements. Additional 2nd color laces included.

LINING: breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation ultralight textile fiber (PS).

> non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption of energy on the heel + LG.

LINE INDY-e S3S

SAFETY FOOTWEAR MADE OF SPECIAL REGENERATED ANTI-ABRASION MATERIAL SPARCO(R) FULL EFFICIENCY. HF REINFORCEMENT ON THE TOE, "FLEXGRIP+" BI-DENSITY PU SOLE WITH SPECIAL HEEL COMPLIANT WITH THE REQUIREMENTS FOR LADDER GRIP (LG). LIGHTWEIGHT, **ENVIRONMENTALLY FRIENDLY AND RESISTANT FOR ANY WORK ENVIRONMENTS.**

Its attention to detail, care devoted to the choice of sustainable materials and its construction of models totally styled, designed and validated in Italy has allowed SPARCO to develop the FULL EFFICIENCY project. whose basic principles are:

- VIRTUOUS CIRCULAR PRODUCTION CYCLE
- ZERO WASTE TARGET

- CORPORATE SOCIAL RESPONSABILITY
- FULLY OWNED TECHNOLOGY

01 Laminar profile to increase grip for SR test.

02 Profiles engraved for a better grip on stairs (LG - heelheight > 10 mm).

03 Laminar profiles for greater slipping resistance.

"FLEXGRIP+" BI-DENSITY PU SOLE WITH SPECIAL HEEL COMPLIANT WITH THE REQUIREMENTS FOR LADDER GRIP (LG).



EFFICIENCY

— SUSTAINABLE IS BETTER —

PS Perforation resistance (min.1100 N & each single value >950 N) non-metal insert: d=3.0mm Conical Nail.

SR Slip resistance - on ceramic tile floor with alycerine.

LG Ladder grip.

P. 98

ASTER ESD S3S SR FO LG

07540..NRCE







special regenerated anti-abrasion material Sparco® FULL EFFICIENCY with HF reinforcement on the toe. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption

of energy on the heel + LG.

35-48 (UK 2½-13).

SUNNY ESD S3S SR FO LG

(€EN ISO 20345:2022

07542..NRCE

special regenerated anti-abrasion material Sparco® FULL EFFICIENCY with HF reinforcement on the toe. Specific eyelet for quick release. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

TOE CAP:

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption of energy on the heel + LG.

SIZES:

35-48 (UK 2½-13).

FORESTER ESD S3S SR FO LG

07540..NRVF







special regenerated anti-abrasion material Sparco® FULL EFFICIENCY with HF reinforcement on the toe. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption of energy on the heel + LG.

35-48 (UK 2½-13).

RANGER ESD S3S SR FO LG

07542..NRVF





special regenerated anti-abrasion material Sparco® FULL EFFICIENCY with HF reinforcement on the toe. Specific eyelet for quick release. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE: antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J. **ANTI-SLIP ANTI-STATIC SOLE:**

PU dual density with absorption of energy on the heel + LG.

SIZES:

LINE INDY S3S

SAFETY FOOTWEAR, MADE OF FINE WATER REPELLENT SUEDE LEATHER OR NUBUCK, "FLEXGRIP+" BI-DENSITY PU SOLE WITH SPECIAL HEEL DESIGN COMPLIANT TO THE REQUIREMENTS FOR LADDER GRIP (LG). LIGHTWEIGHT AND SUITABLE FOR ANY USE.



- 01 Laminar profile to increase grip for SR test.
- **02** Profiles engraved for a better grip on stairs (LG - heelheight > 10 mm).
- 03 Laminar profiles for greater slipping resistance.

"FLEXGRIP+" BI-DENSITY PU SOLE WITH SPECIAL HEEL COMPLIANT WITH THE REQUIREMENTS FOR LADDER GRIP (LG).




(€EN ISO 20345:2022

DGUV 112-191 COMPLIANT (Optional and interchangeable orthopaedic insocks BY SECOSOL®).

- PS Perforation resistance (min.1100 N & each single value >950 N) non-metal insert: d=3.0mm Conical Nail
- SR Slip resistance on ceramic tile floor with glycerine.
- LG Ladder grip.

P. 98

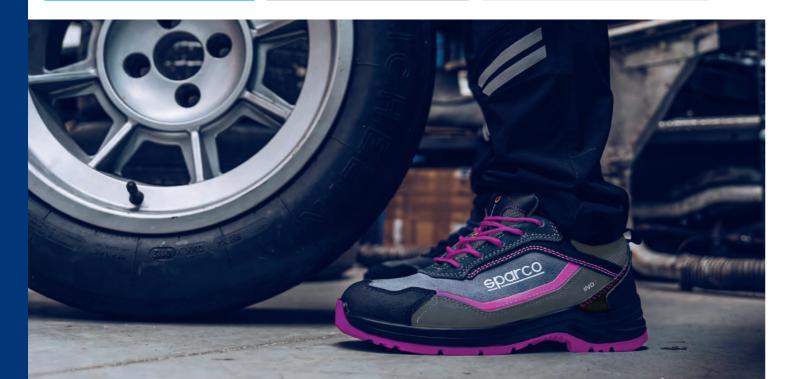

INDY S3S LINE

DANICA ESD S3S SR FO LG







07537..GRFU

water repellent suede

and microfiber reinforcements. Additional 2nd color laces included.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption

of energy on the heel + LG.

SIZES:

35-48 (UK 2½-13).

BALTIMORA ESD S3S SR FO LG

METAL ESSO TO TO

07537..BMGF

water repellent suede and microfiber reinforcements. Additional 2nd color laces included.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

TOE CAP:

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE: PU dual density with absorption

of energy on the heel + LG. SIZES:

35-48 (UK 2½-13).

RICHMOND ESD S3S SR FO LG

07541..BMGF





water repellent nubuck and microfiber reinforcements.

Specific eyelet for quick release. Additional 2nd color laces included.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming. **ANTI-PERFORATION INSOLE:** zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption of energy on the heel + LG.

SIZES:

CAPSULE COLLECTIONS INDY

CAPSULE LINE OF SAFETY FOOTWEAR MADE OF FINE PERFORATED OR WATER-REPELLENT SUEDE, WITH OFFICIAL GULF AND MARTINI RACING LIVERY. "FLEXGRIP+" BI-DENSITY PU SOLE WITH SPECIAL HEEL DESIGN COMPLIANT TO THE REQUIREMENTS FOR LADDER GRIP (LG). COMFORTABLE AND RESISTANT, FOR A COLOURFUL AND DISTINCTIVE LOOK.



- 01 Laminar profile to increase grip for SR test.
- **02** Profiles engraved for a better grip on stairs (LG - heelheight > 10 mm).
- 03 Laminar profiles for greater slipping resistance.

"FLEXGRIP+" BI-DENSITY PU SOLE WITH SPECIAL HEEL COMPLIANT WITH THE REQUIREMENTS FOR LADDER GRIP (LG).

METEOR ESD S1PS SR FO LG



- PS Perforation resistance (min.1100 N & each single value >950 N) non-metal insert: d=3.0mm Conical Nail
- SR Slip resistance on ceramic tile floor with glycerine.
- LG Ladder grip.

P. 98

(€EN ISO 20345:2022

07538GU...BMAF



perforated suede and microfiber reinforcements. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming. **ANTI-PERFORATION INSOLE:**

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass,


insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption

of energy on the heel + LG.

35-48 (UK 2½-13).

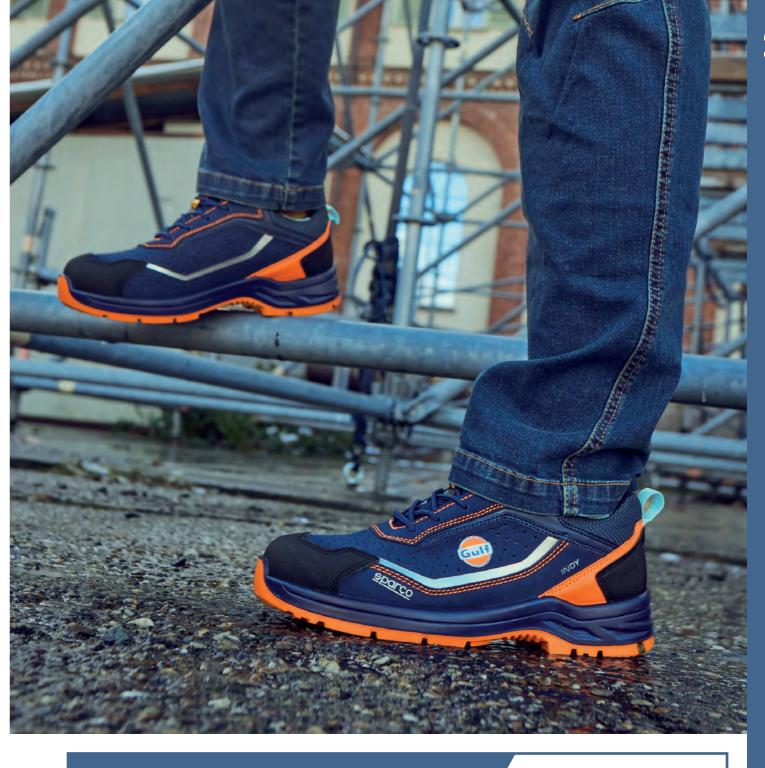

SANREMO ESD S3S SR FO LG

OFFICIAL LICENSED PRODUCTS

07537MR..BMRS

water repellent suede and microfiber reinforcements. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming. **ANTI-PERFORATION INSOLE:**

zero-perforation ultralight textile fiber (PS).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption of energy on the heel + LG.

SIZES: 35-48 (UK 2½-13).

LINE HORIZON

SAFETY FOOTWEAR MADE OF SUEDE AND NYLON UPPER. ULTRALIGHT TEXTILE FIBER ANTI-PERFORATION INSOLE. LIGHT AND DURABLE, THEY ARE SUITABLE FOR ANY WORKING CONDITIONS.



- 01 Anti-fatique cell to increase SR energy absorption.
- 02 Profiles engraved for a better
- 03 Self-cleaning lugs.

ULTRALIGHT DUAL-DENSITY POLYURETHANE SOLE DESIGNED TO FACILITATE DYNAMIC USE AND MOVE SAFELY IN ANY SITUATION.



(€EN ISO 20345:2022



PS Puncture resistance (min. 1100 N & any single value >950 N) Non-metallic insert: tapered nail d=3,0 mm.

SR Slip resistance - on ceramic tile floor with glycerine.

P. 98

DGUV 112-191 COMPLIANT (Optional and interchangeable orthopaedic insocks BY SECOSOL®)



07546..GSVF



abrasion resistant fine suede. I INING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with

ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation textile fibre (PS).

non magnetic fibreglass,

insulating, resistant to 200J. **ANTI-SLIP ANTI-STATIC SOLE:**

dual-density polyurethane

with energy absorption on the heel.

SIZES:

35-49 (UK 2½-14).

MORENO ESD S1PS SR FO

07546..NRCE



NEW



abrasion resistant fine suede.

breathable micro-perforated 3D fabric. **REMOVABLE INSOLE:**

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation textile fibre (PS).

TOE CAP:

non magnetic fibreglass,

insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

dual-density polyurethane

with energy absorption on the heel.

SIZES:

35-49 (UK 2½-14).

FARGO ESD S3S SR FO









07547..NRCE

UPPER: water penetration-resistant nylon and suede.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with

ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation textile fibre (PS).

TOE CAP: non magnetic fibreglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

dual-density polyurethane

with energy absorption on the heel.

35-49 (UK 2½-14).

<u>5</u>

LINE **TARGA**

SAFETY FOOTWEAR MADE OF FINE SMOOTH LEATHER RESISTANT TO WATER PENETRATION. **SOLE IN BI-DENSITY POLYURETHANE** "STREET-TECH" COMPLIANT SR+FO. DURABLE AND RESISTANT, THEY ARE PERFECT IN ANY SITUATION.



ULTRALIGHT DUAL-DENSITY POLYURETHANE SOLE DESIGNED TO FACILITATE DYNAMIC USE AND MOVE SAFELY IN ANY SITUATION.



(€EN ISO 20345:2022+A1:2024

- 01 Anti-fatigue cell to increase SR energy absorption.
- 02 Profiles engraved for a better grip on stairs.
- 03 Self-cleaning lugs.
- PS Puncture resistance (min. 1100 N & any single value >950 N) Non-metallic insert: tapered nail d=3,0 mm.
- SR Slip resistance on ceramic tile floor with glycerine.

P. 98

DGUV 112-191 COMPLIANT

(Optional and interchangeable orthopaedic insocks BY SECOSOL®)

ARTURO ESD S3S SR FO











BTB0011B0K15...

high quality water repellent smooth leather. Additional 2nd color laces included.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic in PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

TOE CAP:

non magnetic fibreglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE: PU dual density with absorption

of energy on the heel. SIZES:

36-48 (UK 3½-13).

WILLY ESD S3S SR FO





BTB0012B0K15...

high quality water repellent smooth leather. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric. **REMOVABLE INSOLE:**

antistatic in PU with

ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

TOE CAP:

non magnetic fibreglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption of energy on the heel.

SIZES:

36-48 (UK 3½-13).

SANDRO ESD S3S SR FO









BTB0011B0K11...

high quality water repellent smooth leather. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE: antistatic in PU with

ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation ultralight textile fiber (PS).

non magnetic fibreglass,

insulating, resistant to 200J. **ANTI-SLIP ANTI-STATIC SOLE:**

PU dual density with absorption

of energy on the heel.

SIZES:

36-48 (UK 3½-13).

PAUL ESD S3S SR FO





BTB0012B0K11...

high quality water repellent smooth leather. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic in PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation ultralight textile fiber (PS).

TOE CAP: non magnetic fibreglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE: PU dual density with absorption

of energy on the heel. SIZES:

LINE **TARGA**

SAFETY FOOTWEAR MADE OF FINE PULL-UP LEATHER RESISTANT TO WATER PENETRATION. SOLE IN BI-DENSITY POLYURETHANE "STREET-TECH" COMPLIANT SR+FO. DURABLE AND RESISTANT THEY ARE PERFECT IN EVERY SITUATION.



- 01 Anti-fatique cell to increase SR energy absorption.
- **02** Profiles engraved for a better grip on stairs.
- 03 Self-cleaning lugs.

ULTRALIGHT DUAL-DENSITY POLYURETHANE SOLE DESIGNED TO FACILITATE DYNAMIC USE AND MOVE SAFELY IN ANY SITUATION.



PS Puncture resistance (min. 1100 N & any single value >950 N) Non-metallic insert: tapered nail d=3,0 mm.

SR Slip resistance - on ceramic tile floor with glycerine.

P. 98

DGUV 112-191 COMPLIANT

(Optional and interchangeable orthopaedic insocks BY SECOSOL®)

(€EN ISO 20345:2022+A1:2024











BTB0011B0D15...

high qualiity water repellent pull-up leather. Additional 2nd color laces included. LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic in PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation ultralight textile fiber (PS).

non magnetic fibreglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption of energy on the heel.

SIZES: 36-48 (UK 3½-13).



VIC ESD S3S SR FO

PREE ESSO TO THE



BTB0012B0D15...

high qualiity water repellent pull-up leather.

Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric. **REMOVABLE INSOLE:**

antistatic in PU with

ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation ultralight textile fiber (PS).

non magnetic fibreglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption

of energy on the heel. SIZES:

S NEW LINE

GOODWOOD

NEW LINE OF ANKLE BOOTS WITH SPECIAL WATER-RESISTANT MEMBRANE DRS (DRY RESPIRATION SYSTEM). FINE WATER REPELLENT NUBUCK UPPER WITH NYLON COLLAR. RESISTANT, DURABLE AND BREATHABLE, THEY DO NOT FEAR ANY WORK ENVIRONMENT.



- 01 Sharp-edged dowels for greater grip on oily surfaces.
- 02 Engraved crampons for greater grip on stairs.
- O3 Closely spaced tread blocks for maximum grip on oily surfaces.

SOFT PU MIDSOLE AND FO+HRO NITRILE RUBBER TREAD WITH SPECIFIC PRISM-FLEX+ TEXTURE WHICH ALLOWS A HIGH GRIP IN ANY CONDITION.



(€EN ISO 20345:2022+A1:2024

(€EN ISO 20347:2022+A1:2024

- PS Puncture resistance (min. 1100 N & any single value >950 N) Non-metallic insert: tapered nail d=3,0 mm.
- SR Slip resistance on ceramic tile floor with glycerine.
- HRO Contact Heat Resistance (300 °C. for 60").



V/ITERPROOF



GOODWOOD LINE



DRS WATERPROOF

BTB0014B0K01...

soft nubuck resistant to water penetration, DRS membrane, nylon thermoformed collar.

3D breathable micro-perforated fabric + DRS membrane. **REMOVABLE INSOLE:**

low density antistatic PU

with ergonomic thermoforming.

ANTI-PERFORATION INSOLE: ultralight zero-perforation textile fiber (PS).

non-magnetic fiberglass, insulating, resistant to 200J

PU over-cap compliant to SC (scuff cap).

ANTISTATIC ANTI-SLIP SOLE:

PU midsole with over-cap,

FO+HRO nitrile rubber tread.

SIZES: 38-48 (UK 5-13).

RIVER ESD 06 SR FO HRO CI HI

BTB0015B0K01...













soft nubuck resistant to water penetration, DRS membrane, nylon thermoformed collar.

3D breathable micro-perforated fabric + DRS membrane.

REMOVABLE INSOLE:

low density antistatic PU with ergonomic thermoforming.

ANTISTATIC ANTI-SLIP SOLE:

PU midsole, FO+HRO nitrile rubber tread.

38-48 (UK 5-13).

VALLEY ESD 06 SR FO HRO CI HI

BTB0015B0D15...













soft nubuck resistant to water penetration,

DRS membrane, nylon thermoformed collar.

REMOVABLE INSOLE: low density antistatic PU

with ergonomic thermoforming.

ANTISTATIC ANTI-SLIP SOLE: PU midsole, FO+HRO nitrile rubber tread.

38-48 (UK 5-13).

LINE

ARCTIC

SAFETY ANKLE BOOTS WITH SPECIAL WATER-RESISTANT MEMBRANE DRS (DRY RESPIRATION SYSTEM), MADE OF HIGH-QUALITY WATER-REPELLENT SUEDE AND MICRO-INJECTED INSERTS. HARD-WEARING AND BREATHABLE, THEY ARE SUITABLE FOR PARTICULARLY DAMP OR WET ENVIRONMENTS.



- **01** Anti-fatigue cell to increase energy absorption.
- **02** Profiles engraved for enhanced grip on stairs.
- 03 Self-cleaning lugs.

SOLE IN DUAL-DENSITY
POLYURETHANE WITH ENERGY
ABSORPTION ON THE HEEL.



- PS Puncture resistance (min. 1100 N & any single value >950 N) Non-metallic insert: tapered nail d=3,0 mm.
- **SR** Slip resistance on ceramic tile floor with glycerine.

P. 98

(€EN ISO 20345:2022+A1:2024



W/ITERPROOF



ARCTIC LINE

ARCTIC S7S SR FO CI HI SC

W/ITERPROOF

BTB0009B0K05..

UPPER:

high-quality water-repellent suede, micro-injected inserts and special DRS WATER-RESISTANT membrane.

LINING

breathable micro-perforated 3D fabric. **REMOVABLE INSOLE:**

antistatic PU.

ANTI-PERFORATION INSOLE: zero-perforation textile fibre.

TOE CAP:

non magnetic fibreglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with absorption of energy on the heel.

SIZES:

36-47 (UK 3½-12).

Footwear designed for those who are forced to work in environments characterised by a high presence of water. Waterproof footwear are made with materials and techniques that prevent the entry of water guaranteeing excellent breathability together with a perfect hygrothermal comfort.

WALK TEST (according to EN ISO 20345:2022)


1,000 steps (about 20 min.) in a tank containing 3 cm of water, the wet internal surface must be < 3 cm².



DRS MEMBRANE BY SPARCO TEAMWORK


(DRY RESPIRATION SYSTEM):

The special *DRS* membrane by SPARCO TEAMWORK ensures maximum breathability and comfort while preventing water from penetrating into the upper, leaving the feet always dry and protected.

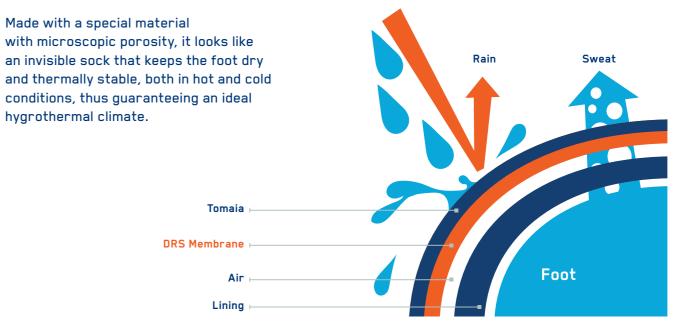

LINE **ALLROAD**

SAFETY FOOTWEAR MADE OF WATER-REPELLENT FINE NUBUCK, SUEDE LEATHER OR MICROFIBRE WITH NYLON COLLAR. PHYLON MIDSOLE WITH CROSSGRIP HRO RUBBER TREAD. LIGHT, PRECIOUS AND DURABLE, THEY ARE SUITABLE FOR BOTH OUTDOOR AND INDOOR USE.

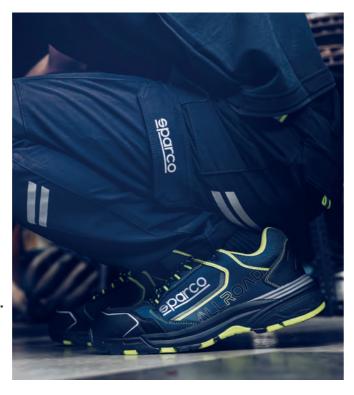

SOCHI ESD S3S SR FO HRO

METAL HRO

07528..BMGF



LINING:

REMOVABLE INSOLE:

ergonomic thermoforming.

TOE CAP: non magnetic fibreglass,

insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

with energy absorption on the heel.

38-48 (UK 5-13).

HPPFR:

nylon and water-repellent microfibre.

breathable micro-perforated 3D fabric.

antistatic PU with

ANTI-PERFORATION INSOLE:

zero-perforation textile fibre (PS).

phylon midsole and FO+HRO nitrile rubber tread

SIZES:

07528..NRNR









STIRIA ESD S3S SR FO HRO



UPPER:

nylon and water-repellent microfibre.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with

ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation textile fibre (PS).

non magnetic fibreglass,

insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE: phylon midsole and FO+HRO nitrile rubber tread

with energy absorption on the heel.

38-48 (UK 5-13).



ULTRALIGHT SOLE WITH PHYLON* MIDSOLE AND CROSSGRIP RUBBER TREAD. IT FEATURES AN IDEAL SCULPTURE FOR MAXIMUM GRIP AND STABILISATION ON GRAVELLY, MUDDY AND SNOW-COVERED SURFACES, LIGHT AND COMFORTABLE. IT ABSORBS VIBRATIONS AND PREVENTS DAMAGE TO THE LOWER LIMBS AND THE SPINE.

* Phylon is a light and resistant plastic made with EVA foam obtained by injection of compressed air.



(€EN ISO 20345:2022

DGUV 112-191 COMPLIANT

(Optional and interchangeable orthopaedic insocks BY SECOSOL®) 01 Laminar engraving for maximum grip.

02 Anti-fatigue lug to increase energy absorption.

03 Large side drains for water, mud and debris.

04 Laminar engraving for greater slipping resistance.

PS Puncture resistance (min. 1100 N & any single value >950 N) Non-metallic insert: tapered nail d=3,0 mm.

SR Slip resistance - on ceramic tile floor with glycerine.

HRO Contact Heat Resistance (300 °C. for 60").

P. 98

MOTEGI ESD S3S SR FO HRO

07529..NRGF

HPPFR:

nylon and water-repellent microfibre.

LINING: breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with

ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation textile fibre (PS).

TOE CAP:

non magnetic fibreglass,

insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:


phylon midsole and FO+HRO nitrile rubber tread with energy absorption on the heel.

SIZES:

38-48 (UK 5-13).

OKAYAMA ESD S3S SR FO HRO

07529..NRNR





UPPER:

nylon and water-repellent microfibre.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with

ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation textile fibre (PS).

TOE CAP: non magnetic fibreglass,

insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

phylon midsole and FO+HRO nitrile rubber tread with energy absorption on the heel.

SIZES:

38-48 (UK 5-13).

CAPSULE COLLECTIONS **GYMKHANA**

SPECIAL LINE OF SAFETY FOOTWEAR IN MARTINI RACING LIVERY. FLEXIBLE, LIGHTWEIGHT SOLES AND PREMIUM MATERIALS SUCH AS NUBUCK, SUEDE OR VELOUR MICROFIBER. COMFORTABLE AND WITH A UNIQUE STYLE.

THE SPECIFIC DESIGN OF THE MULTIGRIP SOLE MAKES IT PARTICULARLY SUITABLE FOR USE ON FLAT, INCLINED AND SLIPPERY SURFACES SUCH AS ROOFS (EX STANDARD UNI 11583:2015)




- 01 Self-cleaning profiles for the drainage of liquids.
- 02 Sculpted lugs for greater slip resistance.
- **03** Self-cleaning profiles for the outflow of liquids.

SUPERLIGHT EVA MIDSOLE AND MULTIGRIP FO+HRO RUBBER TREAD.



(€EN ISO 20345:2022



SR Slip resistance - on ceramic tile floor with glycerine.

HRO Contact Heat Resistance (300 °C. for 60").

P. 98



GYMKHANA CAPSULE COLLECTIONS



07527MR..BM

velour microfibre and breathable micro-perforated fabric.

Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE: antistatic PU with

ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation textile fibre (PS).

non magnetic fibreglass,

insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

EVA midsole and FO+HRO nitrile rubber tread

with energy absorption on heel.


SIZES:

36-48 (UK 3½-13).

07535MR..BM

MONTECARLO ESD S3S SR FO HRO

METAL LESSO HRO



OFFICIAL LICENSED PRODUCTS



fine water-repellent nubuck and suede. Additional 2nd color laces included.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with

ANTI-PERFORATION INSOLE: zero-perforation textile fibre (PS).

TOE CAP:

non magnetic fibreglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

EVA midsole and FO+HRO nitrile rubber tread with energy absorption on heel.

SIZES:

36-48 (UK 3½-13).

RED BULL ESD S3S SR FO HRO

METAL HRO sparco

07535RB..BMRS

fine water-repellent nubuck and suede. Additional 2nd color laces included.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE: zero-perforation textile fibre (PS).

non magnetic fibreglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

EVA midsole and FO+HRO nitrile rubber tread with energy absorption on heel.

SIZES:

PRACTICE/NITRO

RUNNING-STYLE SAFETY FOOTWEAR MADE OF BREATHABLE MICRO-PERFORATED 3D FABRIC AND SCRATCH-RESISTANT MICROFIBRE OR WATER-REPELLENT MICROFIBRE. LIGHT AND BREATHABLE, PERFECT FOR INDOOR AND OUTDOOR USE OR HOT WEATHER.



- 01 Laminar profiles to increase grip.
- 02 Profiles engraved for a better grip
- 03 Laminar profiles for greater slipping resistance.

ULTRA-FLEXIBLE SINGLE-DENSITY PU THAT INCREASES COMFORT AND REDUCES STRESS TO THE LOWER LIMBS AND THE SPINE.



- PL Puncture resistance (min.1100 N) non-metal insert: tapered nail
- SR Slip resistance on ceramic tile floor with alycerine.

P. 98

(€EN ISO 20345:2022



KEKE ESD S1PL SR FO

07517..NRVF









breathable micro-perforated fabric and scratch-resistant microfibre with high abrasion resistance.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation textile fibre (PL).

TOE CAP:

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

single-density PU with energy

absorption on the heel.

36-48 (UK 3½-13).

NIGEL ESD S1PL SR FO

07517..NRNR







breathable micro-perforated fabric and scratch-resistant microfibre with high abrasion resistance.

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation textile fibre (PL).

non magnetic fiberglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

single-density PU with energy

absorption on the heel. SIZES:

36-48 (UK 3½-13).

DIDIER ESD S3L SR FO

07522..NRGR







UPPER: high-quality water-repellent microfibre.

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE: antistatic in PU with

ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

zero-perforation textile fibre (PL).

TOE CAP: non magnetic fibreglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

single-density PU with energy absorption on the heel.

36-48 (UK 3½-13).

SAFETY SHOES


NEW LINE **TRACKDAY**

HANDY ESD SB E A SR FO

NEW LINE OF SAFETY FOOTWEAR FOR SPECIAL JOBS IN THE CHEMICAL, MEDICAL, PHARMACEUTICAL, FOOD AND HO.RE.CA SECTORS THAT REQUIRE **COMFORTABLE**, **FLEXIBLE**, EASY-TO-CLEAN SHOES SUITABLE FOR PROLONGED DAILY USE. THANKS TO THE UPPER IN SOFT ANTI-UV MICROFIBER, THE REMOVABLE SUPER-COMFORT INSOLE AND THE SUPER-SOFT DOUBLE-DENSITY PU SOLE. THE NEW TRACKDAY LINE REDEFINES WHITE&BLACK STANDARDS.



BTB0036B0W01...

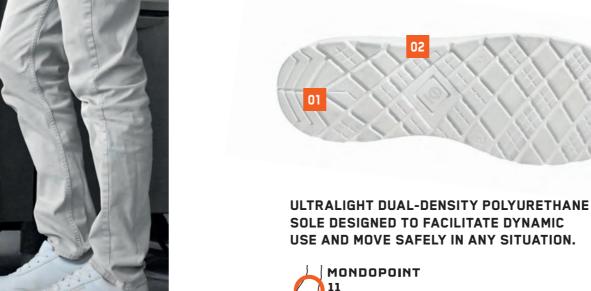

USE AND MOVE SAFELY IN ANY SITUATION.



(€EN ISO 20345:2022+A1:2024

- 01 Sculpted profiles to facilitate the flow of liquids.
- 02 Self-cleaning studs.
- 03 Engraved profiles to ensure maximum grip on any surface.

SR Slip resistance - on ceramic tile floor with glycerine.

P. 98











breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

antistatic in PU with ergonomic thermoforming.

ANTI-PERFORATION INSOLE:

TOE CAP:

non magnetic fibreglass, insulating, resistant to 200J.

ANTI-SLIP ANTI-STATIC SOLE:

PU dual density with energy

absorption on the heel.



OCCUPATIONAL SHOES

LINE S-PARK

RUNNING STYLE OCCUPATIONAL FOOTWEAR COMPLIANT TO THE NEW EN ISO 20347:2022+A1:2024. **SEAMLESS SUPERLIGHT MESH UPPER**, SOFT PHYLON MIDSOLE AND FO+HRO NITRILE RUBBER TREAD WITH HIGH ENERGY ABSORPTION. LIGHTWEIGHT AND BREATHABLE, THEY ARE SUITABLE FOR WORKING OR OUTDOOR LEISURE.





SUPERLIGHT SOLE WITH PHYLON MIDSOLE AND HRO RUBBER TREAD. SUITABLE FOR ANY USE, **EVEN FOR OUTDOOR LEISURE.**

(€EN ISO 20347:2022+A1:2024



floor with glycerine.

SR Slip resistance - on ceramic tile

01 Self-cleaning profiles for the outflow of liquids. 02 Central studs with heel carving for maximum flexibility and grip. 03 Lamellar engraving for greater

slip resistance.

HRO Contact Heat Resistance (300 °C. for 60").

P. 98

LEON 01 SR FO HRO

BTB0007B0N31...



seamless superlight breathable mesh fabric

LINING:

breathable micro-perforated 3D fabric.

low-density antistatic PU

ANTISTATIC ANTI-SLIP SOLE:

super comfortable PHYLON midsole, FO+HRO nitrile

REMOVABLE INSOLE:

with ergonomic thermoforming.

rubber tread with high energy absorption.

36-48 (UK 3½-13).

SALOU 01 SR FO HRO

BTB0007B0E43...







UPPER: seamless superlight breathable mesh fabric

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

low-density antistatic PU with ergonomic thermoforming.

ANTISTATIC ANTI-SLIP SOLE:

super comfortable PHYLON midsole, FO+HRO nitrile rubber tread with high energy absorption.

36-48 (UK 3½-13).

GAP 01 SR FO HRO

BTB0007B0K05...







seamless superlight breathable mesh fabric

LINING:

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE: low-density antistatic PU

with ergonomic thermoforming.

ANTISTATIC ANTI-SLIP SOLE:

super comfortable PHYLON midsole, FO+HRO nitrile rubber tread with high energy absorption.

36-48 (UK 3½-13).

SEPANG 01 SR FO HRO





BTB0007B0K12...

seamless superlight breathable mesh fabric

breathable micro-perforated 3D fabric.

REMOVABLE INSOLE:

low-density antistatic PU with ergonomic thermoforming.

ANTISTATIC ANTI-SLIP SOLE:

super comfortable PHYLON midsole, FO+HRO nitrile rubber tread with high energy absorption.

MARTINI RACING

S-PARK

RUNNING STYLE OCCUPATIONAL FOOTWEAR WITH OFFICIAL MARTINI RACING LIVERY, COMPLIANT TO THE NEW EN ISO 20347:2022+A1:2024.

SEAMLESS SUPERLIGHT MESH UPPER, SOFT PHYLON MIDSOLE AND FO+HRO NITRILE RUBBER TREAD WITH HIGH ENERGY ABSORPTION. LIGHTWEIGHT AND BREATHABLE. THEY ARE SUITABLE FOR WORKING OR LEISURE.



- **01** Self-cleaning profiles for the outflow of liquids.
- 02 Central studs with heel carving for maximum flexibility and grip.
- 03 Lamellar engraving for greater

SUPERLIGHT SOLE WITH PHYLON MIDSOLE AND HRO RUBBER TREAD. SUITABLE FOR ANY USE, **EVEN FOR OUTDOOR LEISURE.**

(€EN ISO 20347:2022+A1:2024

- SR Slip resistance on ceramic tile floor with glycerine.
- **HRO** Contact Heat Resistance (300 °C. for 60").



MARTINI RACING

OFFICIAL LICENSED PRODUCTS



S-PARK MARTINI RACING

SARDINIA 01 SR FO HRO

BTB0008D0N31...





seamless superlight breathable mesh fabric

LINING:

REMOVABLE INSOLE:

breathable micro-perforated 3D fabric.

low-density antistatic PU

with ergonomic thermoforming. **ANTISTATIC ANTI-SLIP SOLE:**

super comfortable PHYLON midsole, FO+HRO nitrile rubber tread with high energy absorption.

36-48 (UK 3½-13).

HOODIE REPLICA MARTINI RACING

01279MR..

SPECIFICATIONS:

Hooded sweatshirt made of ultra-soft cotton blend featuring the iconic Martini Racing livery. The logo patches and stripes are fully

MATERIAL:

90% cotton, 10% polyester 300 gr/m² hood lined in soft jersey SIZES: XS-3XL

SPARCO-OFFICIAL.COM





®

TECH SOFT-SHELL YORK

YORK GREY/GREEN

02412GSVF..

SIZES: XS-3XL

YORK BLACK/ORANGE

02412NRAF..



TECH SOFT-SHELL

WEIGHT: 330 gr/m²

COMPOSITION: Outer 93% polyester, 7% spandex Inside 100% polyester (polar fleece)

SPECIFICATIONS:

- Reinforcement inserts on shoulders and sleeves made of anti-abrasion material.
- High visibility reflective strips on the sleeves.
- Removable and foldable hood with double adjustment.
- Elasticated cuffs.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

TECH SOFT-SHELL

WEIGHT: 330 gr/m²

COMPOSITION: Outer 93% polyester, 7% spandex Inside 100% polyester (polar fleece)

SPECIFICATIONS:

- Reinforcement inserts on shoulders and sleeves made of anti-abrasion material.
- High visibility reflective strips on the sleeves.
- Removable and foldable hood with double adjustment.
- Elasticated cuffs.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

YORK GREY/YELLOW

02412GSGF..



TECH SOFT-SHELL

WEIGHT: 330 gr/m²

COMPOSITION: Outer 93% polyester, 7% spandex Inside 100% polyester (polar fleece)

SIZES: XS-3XL

SPECIFICATIONS:

- Reinforcement inserts on shoulders and sleeves made of anti-abrasion material.
- High visibility reflective strips on the sleeves.
- Removable and foldable hood with double adjustment.
- Flasticated cuffs.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

YORK BLACK/GREY

02412NRGS..



TECH SOFT-SHELL

WEIGHT: 330 gr/m²

COMPOSITION: Outer 93% polyester, 7% spandex Inside 100% polyester (polar fleece)

SIZES: XS-3XL

- Reinforcement inserts on shoulders and sleeves made of anti-abrasion material.
- High visibility reflective strips on the sleeves.
- Removable and foldable hood with double adjustment.
- Elasticated cuffs.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

5[®] WORKWEAR TECH HOODED FULL ZIP COLORADO **(€**EN ISO 13688:2022

TECH HOODED FULL ZIP COLORADO

COLORADO GREY/GREEN

02414GSVF..



TECH FULL ZIP SWEATSHIRT

WEIGHT: 280 gr/m²

COMPOSITION: 80% cotton - 20% polyester SIZES: XS-3XL

SPECIFICATIONS:

- Reinforced sleeves with anti-abrasion inserts and high visibility reflective strips.
- Reinforcement inserts on the shoulders.
- Integrated adjustable hood with colored lining.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

COLORADO BLACK/ORANGE

02414NRAF..



TECH FULL ZIP SWEATSHIRT

WEIGHT: 280 gr/m²

COMPOSITION: 80% cotton - 20% polyester

SIZES: XS-3XL SPECIFICATIONS:

- Reinforced sleeves with anti-abrasion inserts and high visibility reflective strips.
- Reinforcement inserts on the shoulders.
- Integrated adjustable hood with colored lining.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

COLORADO GREY/YELLOW

02414GSGF..



TECH FULL ZIP SWEATSHIRT

WEIGHT: 280 gr/m²

COMPOSITION: 80% cotton - 20% polyester

SIZES: XS-3XL

SPECIFICATIONS:

- Reinforced sleeves with anti-abrasion inserts and high visibility reflective strips.
- Reinforcement inserts on the shoulders.
- Integrated adjustable hood with colored lining.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

COLORADO BLACK/GREY

02414NRGS..



TECH FULL ZIP SWEATSHIRT

WEIGHT: 280 gr/m²

COMPOSITION: 80% cotton - 20% polyester

SIZES: XS-3XL SPECIFICATIONS:

- Reinforced sleeves with anti-abrasion inserts and high visibility reflective strips.
- Reinforcement inserts on the shoulders.
- Integrated adjustable hood with colored lining.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.



TECH FULL ZIP ALABAMA















TECH LIGHT VEST ILLINOIS

ILLINOIS GREY/GREEN

02419GSVF..



TECH LIGHT VEST

WEIGHT: 240 gr/m²

COMPOSITION: 90% nylon - 10% spandex SIZES: XS-3XL

SPECIFICATIONS:

- Reinforcement inserts on the shoulders made of anti-abrasion material.
- Coated and waterproof central zip.
- High visibility reflective strips on the back.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

ILLINOIS BLACK/ORANGE

02419NRAF..



SIZES: XS-3XL

TECH LIGHT VEST

WEIGHT: 240 gr/m²

COMPOSITION: 90% nylon - 10% spandex

SIZES: XS-3XL

SPECIFICATIONS:

- Reinforcement inserts on the shoulders made of anti-abrasion material.
- Coated and waterproof central zip.
- High visibility reflective strips on the back.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

ILLINOIS GREY/YELLOW

02419GSGF...



SIZES: XS-3XL

TECH LIGHT VEST

WEIGHT: 240 gr/m²

COMPOSITION: 90% nylon - 10% spandex

SIZES: XS-3XL

SPECIFICATIONS:

- Reinforcement inserts on the shoulders made of anti-abrasion material.
- Coated and waterproof central zip.
- High visibility reflective strips on the back.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

ILLINOIS BLACK/GREY

02419NRGS..



SIZES: XS-3XL

TECH LIGHT VEST

WEIGHT: 240 gr/m²

COMPOSITION: 90% nylon - 10% spandex

SIZES: XS-3XL

- Reinforcement inserts on the shoulders made of anti-abrasion material.
- Coated and waterproof central zip.
- High visibility reflective strips on the back.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

TECH POLO TOLEDO

TOLEDO GREY/GREEN

02415GSVF...



TECH POLO

WEIGHT: 180 gr/m²

COMPOSITION: 65% cotton,

35% polyester with pique effect

SIZES: XS-3XL

SPECIFICATIONS:

- High visibility reflective sleeve strips.
- Contrasting inserts under sleeves and collar.
- Reinforced shoulder inserts.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

TOLEDO BLACK/ORANGE

02415NRAF..



TECH POLO

WEIGHT: 180 gr/m²

COMPOSITION: 65% cotton,

35% polyester with piquè effect SIZES: XS-3XL

SPECIFICATIONS:

- High visibility reflective sleeve strips.
- Contrasting inserts under sleeves and collar.
- Reinforced shoulder inserts.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

TOLEDO GREY/YELLOW

02415GSGF...



TECH POLO

WEIGHT: 180 gr/m²

COMPOSITION: 65% cotton,

35% polyester with piquè effect SIZES: XS-3XL

SPECIFICATIONS:

- High visibility reflective sleeve strips.
- Contrasting inserts under sleeves and collar.
- Reinforced shoulder inserts.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

TOLEDO BLACK/GREY

02415NRGS..




TECH POLO

WEIGHT: 180 gr/m²

COMPOSITION: 65% cotton,

35% polyester with pique effect SIZES: XS-3XL

- High visibility reflective sleeve strips.
- Contrasting inserts under sleeves and collar.
- Reinforced shoulder inserts.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

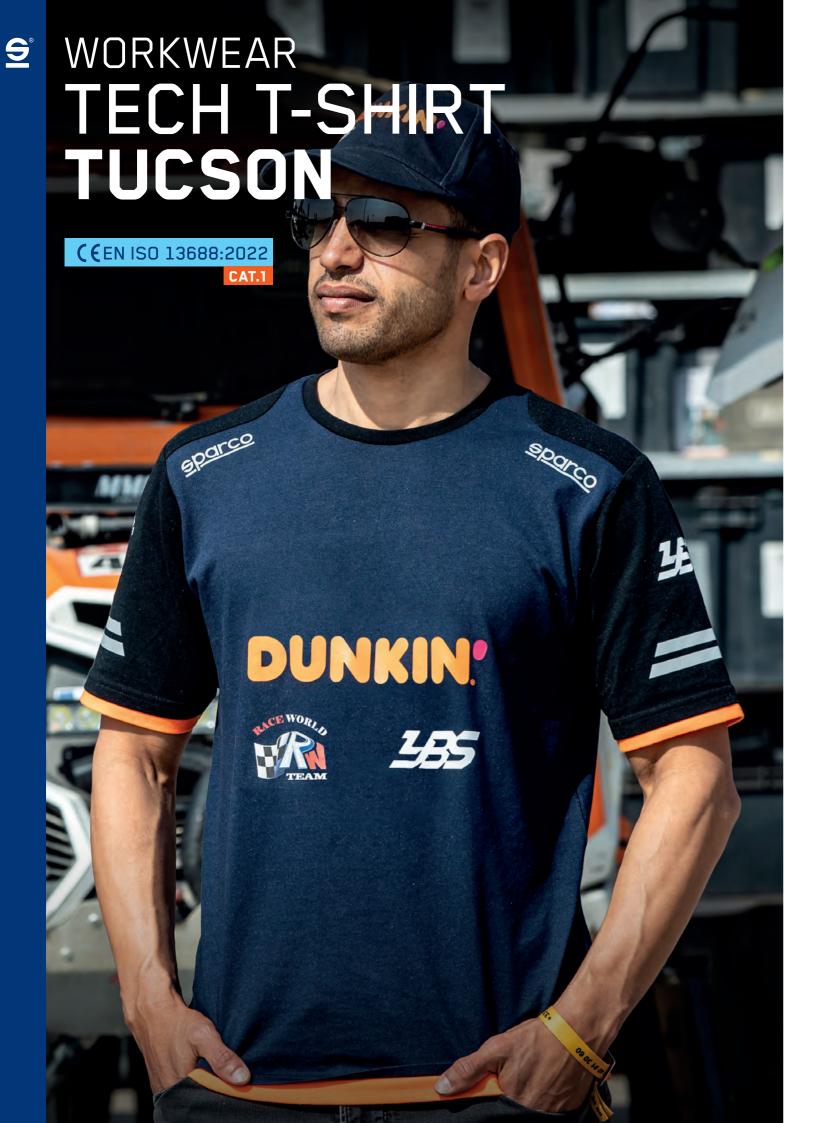

TECH T-SHIRT TUCSON

TUCSON GREY/GREEN

02416GSVF...



TECH T-SHIRT

WEIGHT: 170 ar/m²

COMPOSITION: 50% cotton, 50% polyester piquè effect

SIZES: XS-3XL SPECIFICATIONS:

- High visibility reflective sleeve strips.
- Reinforced shoulder inserts.
- Contrasting inserts under the sleeves and at the waist.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

TUCSON BLACK/ORANGE

02416NRAF..



TECH T-SHIRT

WEIGHT: 170 ar/m²

COMPOSITION: 50% cotton, 50% polyester piquè effect

SIZES: XS-3XL SPECIFICATIONS:

- High visibility reflective sleeve strips.
- Reinforced shoulder inserts.
- Contrasting inserts under the sleeves and at the waist.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

TUCSON **GREY/YELLOW**

02416GSGF..



TECH T-SHIRT

WEIGHT: 170 ar/m²

COMPOSITION: 50% cotton, 50% polyester piquè effect

SIZES: XS-3XL SPECIFICATIONS:

- High visibility reflective sleeve strips.
- Reinforced shoulder inserts.
- Contrasting inserts under the sleeves and at the waist.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

TUCSON **BLACK/GREY**

02416NRGS..



TECH T-SHIRT

WEIGHT: 170 ar/m²

COMPOSITION: 50% cotton, 50% polyester piquè effect SIZES: XS-3XL

- High visibility reflective sleeve strips.
- Reinforced shoulder inserts.
- Contrasting inserts under the sleeves and at the waist.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

TECH TROUSERS OREGON

OREGON GREY/GREEN

02417GSVF...



02417NRAF..



SIZES: XS-3XL



WEIGHT: 240 gr/m²

COMPOSITION: 90% nylon - 10% spandex

SIZES: XS-3XL

SPECIFICATIONS:

- Anti-abrasion reinforcements on the knees.
- Zip and button closure.
- Hidden side pocket with zip closure.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

TECH TROUSERS

WEIGHT: 240 gr/m²

COMPOSITION: 90% nylon - 10% spandex SIZES: XS-3XL

SPECIFICATIONS:

- Anti-abrasion reinforcements on the knees.
- Zip and button closure.
- Hidden side pocket with zip closure.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

OREGON GREY/YELLOW

02417GSGF...



SIZES: XS-3XL

TECH TROUSERS

WEIGHT: 240 gr/m²

COMPOSITION: 90% nylon - 10% spandex

SIZES: XS-3XL

SPECIFICATIONS:

- Anti-abrasion reinforcements on the knees.
- Zip and button closure.
- Hidden side pocket with zip closure.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

OREGON **BLACK/GREY**

02417NRGS..



SIZES: XS-3XL


TECH TROUSERS

WEIGHT: 240 gr/m²

COMPOSITION: 90% nylon - 10% spandex

SIZES: XS-3XL

- Anti-abrasion reinforcements on the knees.
- Zip and button closure.
- Hidden side pocket with zip closure.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

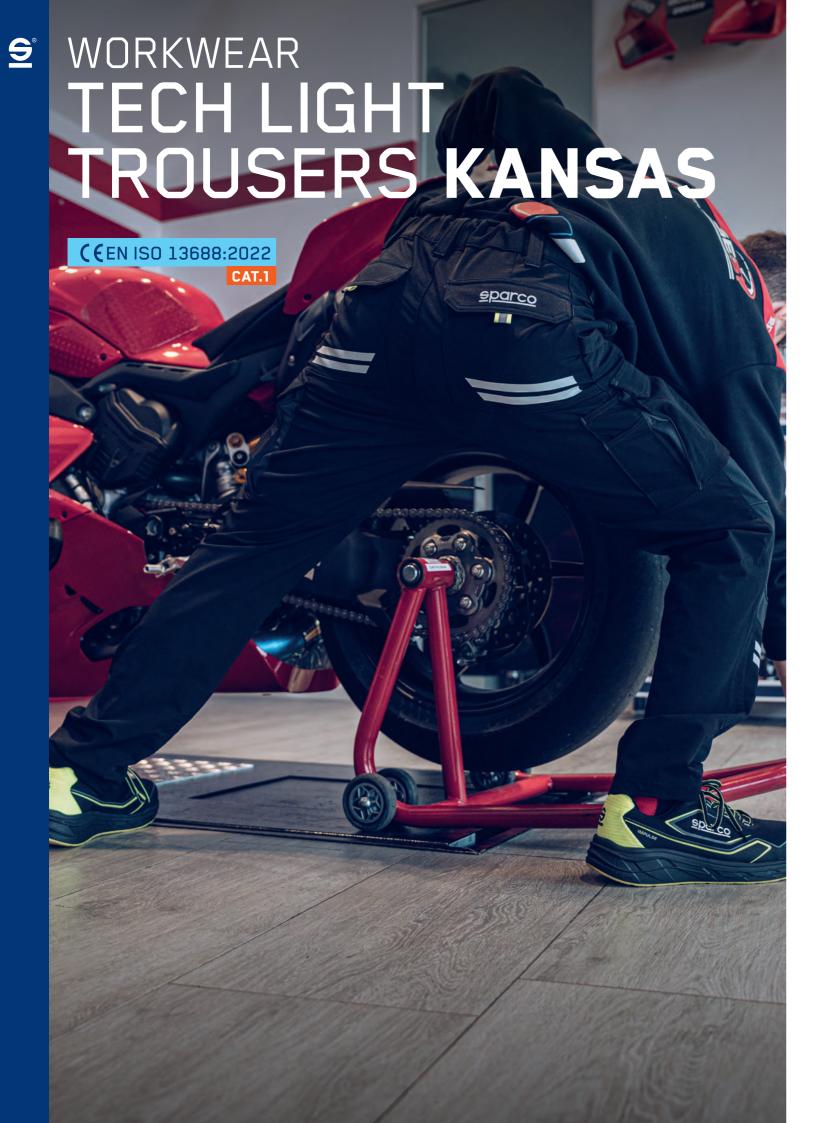

TECH LIGHT TROUSERS KANSAS

KANSAS GREY/GREEN

02425GSVF..



SIZES: XS-3XL

TECH LIGHT TROUSERS

KANSAS BLACK/ORANGE

WEIGHT: 170 gr/m²

COMPOSITION: 90% nylon - 10% spandex SIZES: XS-3XL

SPECIFICATIONS:

- Anti-abrasion reinforcements on the knees.
- Zip and button closure.
- Hidden side pocket with zip closure.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

TECH LIGHT TROUSERS

WEIGHT: 170 gr/m²

COMPOSITION: 90% nylon - 10% spandex SIZES: XS-3XL

SPECIFICATIONS:

- Anti-abrasion reinforcements on the knees.
- Zip and button closure.
- Hidden side pocket with zip closure.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

KANSAS GREY/YELLOW

02425GSGF...



SIZES: XS-3XL

TECH LIGHT TROUSERS

WEIGHT: 170 ar/m²

COMPOSITION: 90% nylon - 10% spandex

SIZES: XS-3XL

SPECIFICATIONS:

- Anti-abrasion reinforcements on the knees.
- Zip and button closure.
- Hidden side pocket with zip closure.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

KANSAS BLACK/GREY

02425NRGS..

02425NRAF..

SIZES: XS-3XL



SIZES: XS-3XL

TECH LIGHT TROUSERS

WEIGHT: 170 gr/m²

COMPOSITION: 90% nylon - 10% spandex

SIZES: XS-3XL

- Anti-abrasion reinforcements on the knees.
- Zip and button closure.
- Hidden side pocket with zip closure.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

WORKWEAR

(€EN ISO 13688:2022

TECH DENIM DALLAS

CAT.1

<u>5</u>®

TECH DENIM DALLAS



02430BS..

SIZES: XS-3XL

TECH DENIM JEANS

WEIGHT: 240 gr/m²

COMPOSITION: 98% cotton - 2% spandex

SIZES: XS-3XL

- Ergonomic construction to facilitate knee movement.
- Tool ring on side pocket.
- Elasticated waist.
- Embroidered details.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.







TECH LIGHT SHORTS LAREDO

LAREDO GREY/GREEN

02428GSVF...

SIZES: XS-3XL



TECH LIGHT SHORTS

WEIGHT: 170 gr/m²

COMPOSITION: 90% nylon - 10% spandex SIZES: XS-3XL

SPECIFICATIONS:

- Zip and button closure.
- Hidden side pocket with zip closure. • Badge holder ring on the front left belt loop.
- High visibility reflective strips.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

LAREDO GREY/GREEN

02428NRAF..

SIZES: XS-3XL



TECH LIGHT SHORTS

WEIGHT: 170 gr/m²

COMPOSITION: 90% nylon - 10% spandex SIZES: XS-3XL

SPECIFICATIONS:

- Zip and button closure.
- Hidden side pocket with zip closure.
- Badge holder ring on the front left belt loop. • High visibility reflective strips.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

LAREDO GREY/GREEN

02428GSGF...

SIZES: XS-3XL



TECH LIGHT SHORTS

WEIGHT: 170 gr/m²

COMPOSITION: 90% nylon - 10% spandex SIZES: XS-3XL

SPECIFICATIONS:

- Zip and button closure.
- Hidden side pocket with zip closure.
- Badge holder ring on the front left belt loop.
- High visibility reflective strips.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

LAREDO GREY/GREEN

02428NRGS..

SIZES: XS-3XL




TECH LIGHT SHORTS

WEIGHT: 170 gr/m²

COMPOSITION: 90% nylon - 10% spandex

SIZES: XS-3XL

- Zip and button closure.
- Hidden side pocket with zip closure.
- Badge holder ring on the front left belt loop.
- High visibility reflective strips.
- COMPLIANT TO THE EN ISO 13688:2022 CAT.1.

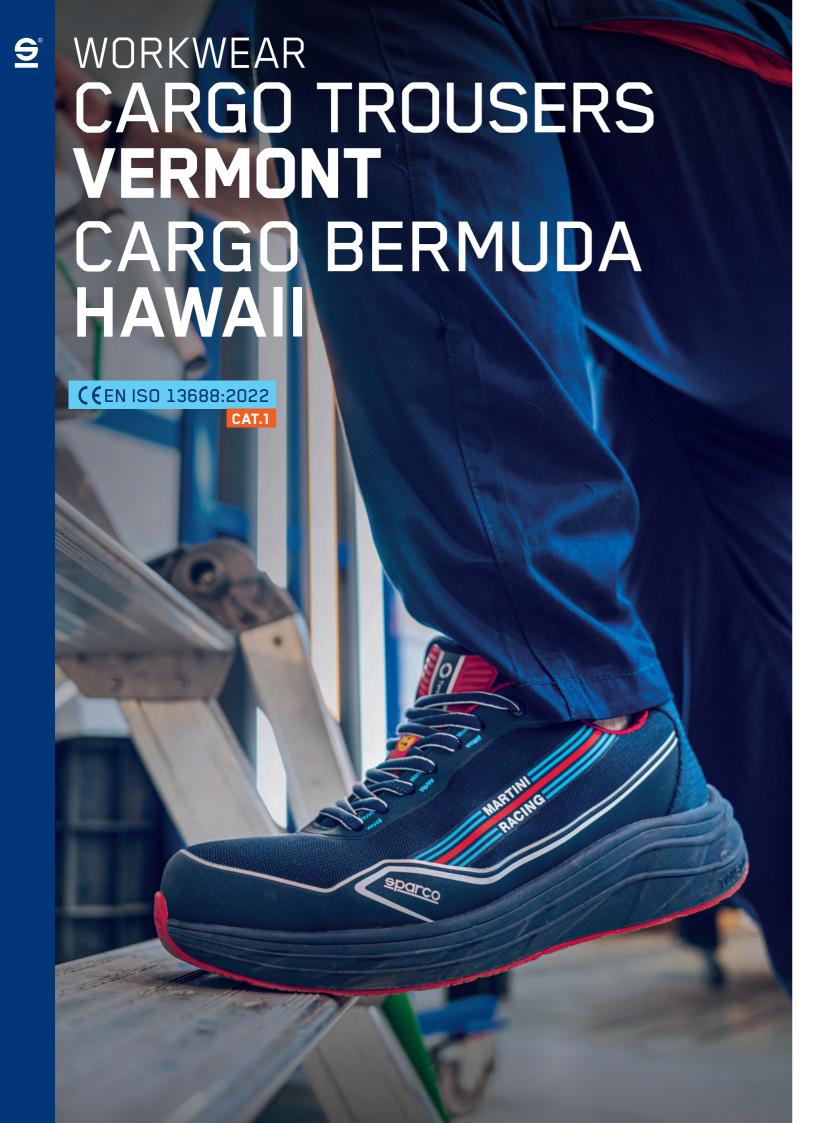

CARGO TROUSERS/BERMUDA VERMONT/HAWAII



• Zip and button closure.

• Hidden internal side pocket with zip closure.

• COMPLIANT TO EN ISO 13688:2022 - CAT.1.



WEIGHT: 190 gr/m²

SIZES: XS-3XL

SPECIFICATIONS:

• Zip and button closure.

COMPOSITION: 60% cotton - 40% polyester

• Hidden internal side pocket with zip closure. • COMPLIANT TO EN ISO 13688:2022 - CAT.1.

• COMPLIANT TO EN ISO 13688:2022 - CAT.1.




• COMPLIANT TO EN ISO 13688:2022 - CAT.1.



SIZES: XS-3XL



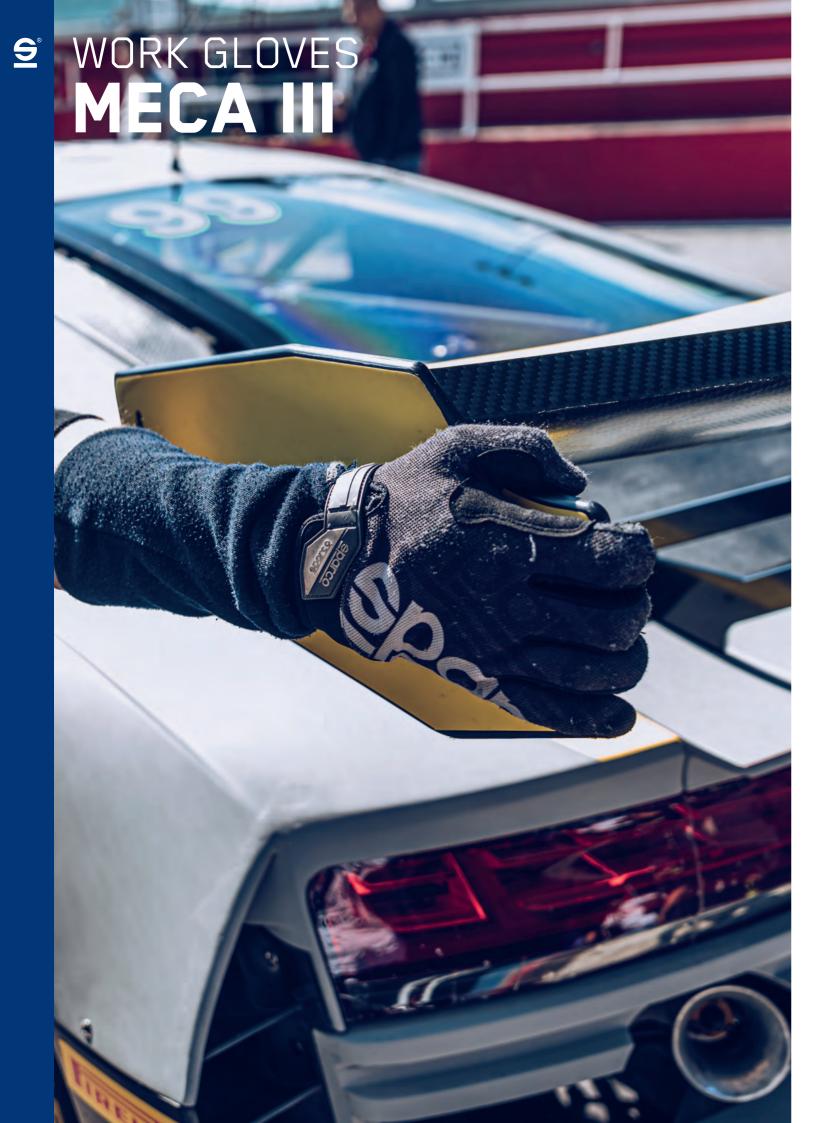

MECA III



002093..BMAF

WORK GLOVES

COMPOSITION:
47% polyester, 35% suede, 18% elastane SIZES:

SPECIFICATIONS:

abrasion-resistant synthetic leather palm. Reinforcements between thumb and index finger. Back made of abrasion-resistant printed stretch fabric. Fastening strap to adjust fit.












5[®]



WALL DISPLAY SHOES/CLOTHING 100X56X212 CM
DIMENSIONS: 100X56 h.212 cm
MATERIAL: Powder coated steel

- **COMPLETE WITH:** 18 shoe shelves 20x10 cm (including 6 load bars)
- 2 clothing bars (depth 25 cm)1 shelf with brackets 99x38 cm
- Metal crowner with Sparco Teamwork logo

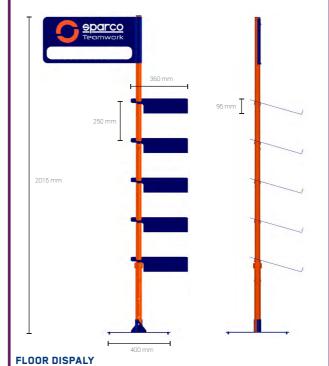

Floor display for shoes and clothing.
Completely adjustable and adaptable to any
environment and height, it is made of solid
powder-coated metal. Base with welded
reinforcement and rubber feet. Suitable for
displaying 5 pairs of shoes and up to 13 items
of clothing. Comes complete with a kit of 10

SPARCO® custom hangers (cod. 099108NR10).















5

5°











PRACTICE / NITRO / INDY





07526..NRGF

07527..VSLI

07527..BMGF





LANDO S1P SRC















07535..GSVF 🙀 🙆 🕸 📜





07535..BMRS 原配 (本) 中心 (本)







BAKU

ESD S3S SR FO HRO



LEAP ESD S3S SR FO HRO



OLYMPUS ESD S3S SR FO HRO





07528..NRVF 🔉 🧀 🕪 🤡









07528..TAGI 🥁 🚱 🕸 🔰 07529..TAGI 🙀 🚱 🕸 🕸















ROC **ESD S3S SR FO HRO**



STONE **ESD S3S SR FO HRO**



ACROPOLIS ESD S3S SR FO HRO











001289..BMAF

ESD S1PL SR FO

NELSON

07517..NRAZ



07517..NRFU

MARCUS

ESD S3L SR FO

JODY

ESD S1PL SR FO





MIKKO ESD S3L SR F0

JOS

ESD S1PL SR FO









07522..NRNR



07522..NRAZ

CHARLOTTE

ESD S3S SR FO LG

PETTER

ESD S3L SR FO

07522..RSNR

HANNU ESD S3L SR FO







EDMONTON ESD S1PS SR FO LG



07522..BIBI



07537..GSAZ

07539..TAGI

ALGARVE

01 FO SRA



SIZES: 37-47^{*}

*Subject to availability

TOROUE











001289..NRAZ 001289..NRRS



OUTLET



02412BMAZ..

TECH LIGHT-SHELL AUSTIN

02412BMAF..

SIZES: XS-3XL













SIZES: XS-3XL TECH HOODED FULL ZIP COLORADO 02414BMAZ.. 02414BMAF..







TECH POLO TOLEDO

02419BMAF..

02415BMAZ..



SIZES: XS-3XL

TECH T-SHIRT TUCSON

02415BMAF..






02416BMAF..

02416BMAZ..







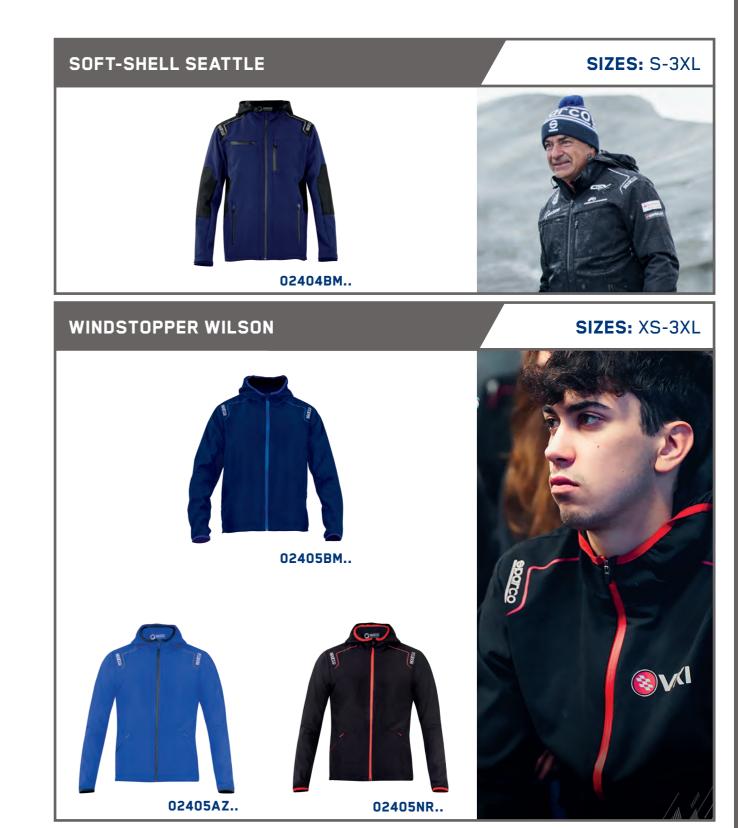



CERTIFICATIONS AND CE STANDARDS

SPARCO TEAMWORK footwear are manufactured using both synthetic and natural materials that comply with the relevant sections of the EN ISO 20345:2022 / EN ISO 20345:2022+A1:2024 / EN ISO 20347:2022+A1:2024 standards for performance and quality. SPARCO TEAMWORK safety footwear are designed to minimise the risk of injury that could be inflicted on the wearer during use. They must be used in conjunction with a safe working environment and do not completely prevent injury if an incident that exceeds the test limits of the EN ISO 20345:2022 / EN ISO 20345:2022+A1:2024 / EN ISO 20347:2022+A1:2024 standards occurs.

GUIDE TO STANDARDS:

EN ISO 20344:2021 Test methodology and general requirements.

EN ISO 20345:2022 / 20345:2022+A1:2024 Specifications for safety footwear with toe cap resistance to 200 J.

EN ISO 20347:2022 / 20347:2022+A1:2024 Specifications for "occupational" or "professional" footwear (no specific toe cap resistance).

SAFETY FOOTWEAR COMPLIANT WITH EN ISO 20345:2022 / 20345:2022+A1:2024

Sparco Teamwork footwear compliant with EN ISO 20345:2022 / EN ISO 20345:2022+A1:2024 protect the wearer's toes from the risk of injury due to falling objects and crushing when worn in industrial and commercial environments where potential hazards exist.

The impact protection provided is 200 Joules.

The compression protection provided is 15,000 Newtons.

Category	Class	Additional requirements		
SB	l o II	Safety basic requirements		
21	I	SB + Closed heel area + Antistatic property + Energy absorption of seat region		
S2	I	S1+ Upper water penetration and absorption		
S3 (metal insert type P) or S3L (non-metal insert type PL) or S3S (non-metal insert type PS)	I	S2 + perforation resistance according to the type + cleated outsole		
S4	Ш	SB + Closed heel area + Antistatic property + Energy absorption of seat region		
S5 (metal insert type P) or S5L (non-metal insert type PL) or S5S (non-metal insert type PS)	П	S4 + perforation resistance according to the type cleated outsole		
S6	I	S2 + water resistance of the whole footwear		
S7 (metal insert type P) or S7L (non-metal insert type PL) or S7S (non-metal insert type PS)	I	S3 + water resistance of the whole footwear		
Class I: Footwear made of leather and other materials, excluding all-rubber or all-polymeric footwear				
Class II: All-polymeric (i.e. entirely moulded) including all-rubber (i.e. entirely vulcanized) footwear				


OCCUPATIONAL FOOTWEAR COMPLIANT WITH EN ISO 20347:2022 / 20347:2022+A1:2024:

Footwear compliant with EN ISO 20347:2022 / 20347:2022+A1:2024 are called "occupational footwear" or "professional footwear" and do not require any specific toe cap resistance.

Category	Class	Additional requirements		
ОВ	I			
01	I	As OB, plus + Closed heel area + Energy absorption at the heel region + Antistatic		
02	I	As 01 + Penetration and absorption of water in the upper part		
03 (Metal insert type P) or 03L (non-Metal insert type PL) or 03S (non-Metal insert type PS)	I	As O2 + Puncture resistance by type + Studded sole		
04	П	As OB, + Closed heel area + Energy absorption in the heel region + Antistatic		
05 (Inserto Metallico tipo P) o 05L (Inserto non-Metallico tipo PL) o 05S (Inserto non-Metallico tipo PS)	П	As 04 + Puncture resistance by type + Studded solei		
06	I	As O2 + Water penetration into the entire shoe		
07 (Inserto Metallico tipo P) o 05L(Inserto non-Metallico tipo PL) o 05S(Inserto non-Metallico tipo PS)	I	As 03 + Water penetration resistance of the whole shoe		
NOTE 1: To facilitate marking, this table classifies work footwear with the most common combinations of basic and additional requirements.				
NOTE 2: If the footwear has not been tested according to the slip resistance requirements, it is marked with the symbol "0".				
OBH: Hybrid footwear.				

PRODUCT MARKING

Marking on footwear denotes that the footwear is licensed according to the PPE regulation and is as follows:

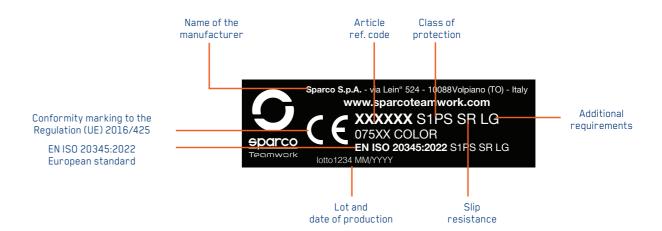

97

CERTIFICATIONS AND CE STANDARDS

ADDITIONAL PROTECTIONS: THE ADDITIONAL REQUIREMENTS

Additional protections may be provided, identified on the product by the following markings:

	Marking code
Perforation resistance	
Perforation resistance (min.1100 N) metal insert : d=4.5mm Conical Nail	Р
Perforation resistance (min.1100 N) non-metal insert :d=4.5mm Conical Nail	PL
Per foration r esistance (min.1100 N & e ach single value >950 N) non-metal insert: d=3.0mm Conical Nail	PS
Electrical properties	
Par tially Conductive (maximum r esistance 100 k Ω)	С
Antistatic (resistance r ange of 100 k Ω to 1000 M Ω)	A
Resistance to inimical environments:	
Heat Insulation of sole complex	н
Cold Insulation of sole complex	CI
Energy absorption of seat region (20 Joules)	E
Water resistance	WR
Metatarsal protection	М
Ankle protection	AN
Cut resistant	CR
Scuff Cap abrasion	SC
Slip resistance - on ceramic tile floor with glycerine	SR
Upper	
Water penetration and water absorption	WPA
Outsole	
Resistance to hot contact	HRO
Resistance to fuel oil	FO
Ladder grip	LG

PERFORATION RESISTANCE

In Sparco Teamwork footwear, non-metal perforation-resistance insert is used.

The perforation resistance of this footwear has been measured in the laboratory using standardized nails and forces. Nails of smaller diameter and higher static or dynamic loads will increase the risk of perforation occurring. In such circumstances, additional preventative measures should be considered. Three generic types of perforation resistant inserts are currently available in PPE footwear. These are metal types and those from non-metal materials, which shall be chosen on basis of a job-related risk assessment. All types give protection against perforation risks, but each has different additional advantages or disadvantages including the following:

- Metal (e.g. S1P, S3): Is less affected by the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness) but due to shoemaking techniques may not cover the entire lower area of the foot.
- Non-metal (PS or PL or category e.g. S1PS, S3L): May be lighter, more flexible and provide greater coverage area, but the perforation resistance may vary more depending on the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness). Two types in terms of the protection afforded are available. Type PS may offer more appropriate protection from smaller diameter objects than type PL.

SLIP RESISTANCE

For footwear successfully tested against EN ISO 20345:2022 slip resistance, the following marking symbol apply:

- Basic requirement of slip resistance: Ceramic tile with sodium lauryl sulphate, no symbol.
- Additional requirement of slip resistance: Ceramic tile with glycerol, symbol SR.
- The footwear is not tested against slip resistance requirement, it is marked with symbol "Ø". Note: Slippage may still occur in certain environments.

CE DECLARATION OF CONFORMITY

For Declaration of conformity, please refer to website: www.sparcoteamwork.com.

ESD CEI EN 61340-5-1 2016 | COR 1:2017 STANDARD

The abbreviation ESD (ElectroStaticDischarge) indicates a discharge of static energy that passes from one body to another. In hazardous workplaces, ESD discharges can be the cause of even serious accidents (starting a fire), and can damage machinery and their sensitive components.

ESD shoes are required for:

- Work with microchips
- Production of sensitive electrical parts
- Painting
- Working in contact with flammable liquids and gases

Sparco Teamwork ESD footwear comply with the regulation of the EN IEC 61340-5-1:2024 and have been certified according to EN IEC 61340-4-3:2018.



COMPLIANCE WITH THE REACH REGULATION

The company complies with the REACH Regulation (EC) no. 1907/2006 in force since 1 June 2007, ensuring that the products used and supplied by SPARCO TEAMWORK:

- do not contain SVHC (Substance of Very High Concern) substances;
- do not contain substances that are on the list in Annex XIV_ of the REACH Regulation;
- do not contain substances that are on the constantly updated Candidate List;
- do not contain substances subject to restrictions (Annex XVII of REACH) that the relative restrictions of use are observed.

Furthermore, in the event that an article contains an SVHC (Substance of Very High Concern) substance or one on the Candidate List in concentrations higher than 0.1% weight/weight, sufficient information is provided with the name of the substance and instructions helpful for the safe use of the article (see Article 59.1 of REACH).

INDEX

SAFETY SHOES

ACROPOLIS	P. 90	JOS	P. 91	RIVER	P. 41	STONE	P. 90
ALGARVE	P. 91	JURI	P. 27	ROC	P. 90	SUNNY	P. 29
ARCTIC	P. 43	KEKE	P. 49				P. 29 P. 19
				ROTOR	P. 13	SUZUKA	
ARTURO	P. 36	KEYNES	P. 17	SALOU	P. 53	TACOMA	P. 90
ASAN	P. 21	LANDO	P. 90	SANDRO	P. 36	TAKUMA	P. 21
ASTER	P. 28	LEAP	P. 90	SANREMO	P. 33	TEXAS	P. 24
BAKU	P. 90	LEON	P. 52	SANYO	P. 18	VALLEY	P. 41
BALTIMORA	P. 31	LINFORD	P. 13	SARDINIA	P. 55	VIC	P. 39
CHARADE	P. 91	LUCAS	P. 15	SEB	P. 90	WALKER	P. 51
CHARLOTTE	P. 91	LUTON	P. 12	SEPANG	P. 53	WILLEN	P. 12
CHESTER	P. 90	MARCUS	P. 91	SOCHI	P. 44	WILLY	P. 37
CHRIS	P. 15	MARTINI	P. 47	SONOMA	P. 22	YUKI	P. 18
COLTON	P. 25	METEOR	P. 32	STIRIA	P. 44		
CONOR	P. 26	MIKKO	P. 91				
CORSICA	P. 16	MILTON	P. 17				
COSY	P. 51	MIRAGE	P. 16	WORKWEAR			
DANI	P. 90	MONTECARLO	P. 47				
DANICA	P. 31	MORENO	P. 35	ALABAMA TECH FULL ZIP			P. 63
DELL	P. 41	MOTEGI	P. 45	ATLANTA TECH SHORTS			P. 94
DETROIT	P. 25	NAOKI	P. 21	AUSTIN TECH LIGHT-SHELL		P. 92	
DIDIER	P. 49	NELSON	P. 91	COLORADO TECH HOODED FULL ZIP		P. 61/93	
DURANGO	P. 91	NIGEL	P. 49	DALLAS TECH DENIM		P. 75	
EDMONTON	P. 91	NINO	P. 38	HAWAII CARGO BERMUDA		P. 78	
FARGO	P. 35	NURBURG	P. 90	ILLINOIS TECH LIGHT VEST			P. 65/93
FELIX	P. 24	OKAYAMA	P. 45	KANSAS TECH LIGHT TROUSERS		P. 73/94	
FORESTER	P. 28	OLYMPUS	P. 90	LAREDO TECH LIGHT SHORTS		P. 77/94	
FUJI	P. 19	ONTARIO	P. 35	OREGON TECH TROUSERS		P. 71/94	
GAP	P. 52	OSCAR	P. 27	PORTLAND POLO			P. 95
GEORGE	P. 15	PATO	P. 23	SEATTLE SOFT-SHELL			P. 95
GREGOR	P. 26	PAUL	P. 37	TOLEDO TECH POLO			P. 67/93
HANDY	P. 50	PETTER	P. 91	TUCSON TECH T-SHIRT			P. 69/93
HANNU	P. 91	RANGER	P. 29	VERMONT CARGO TROUSERS		P. 78	
HOMY	P. 50	RED BULL	P. 47	WILSON WINDSTOPPER		P. 95	
JODY	P. 91	RICHMOND	P. 31	YORK TECH SOFT-SHELL			P. 59/92

100

INDEX

WORK GLOVES

MECA III GLOVES	P. 83
-----------------	-------


POP TOOLS

COUNTER DISPLAY	P. 87
FLOOR DISPLAY	P. 86
GYMKHANA KEYCHAIN	P. 87
HANGER	P. 87
LAYNARD	P. 87
PLEXY DISPLAY	P. 86
SHELF HIGHLIGHTER	P. 87
TEAMWORK FLOORMAT	P. 87
TEAMWORK KEYCHAIN	P. 87
WALL DISPLAY	P. 86

VALIDITY: from 1ST July to 31th December 2025

The data and characteristics indicated in this catalogue are subject to changes without prior notice. The photographic reproduction of the shades of colour may not be perfectly faithful to reality.

In order to constantly improve the collections, the products contained in this catalogue could be replaced or modified. The photos contained are purely illustrative and not binding.

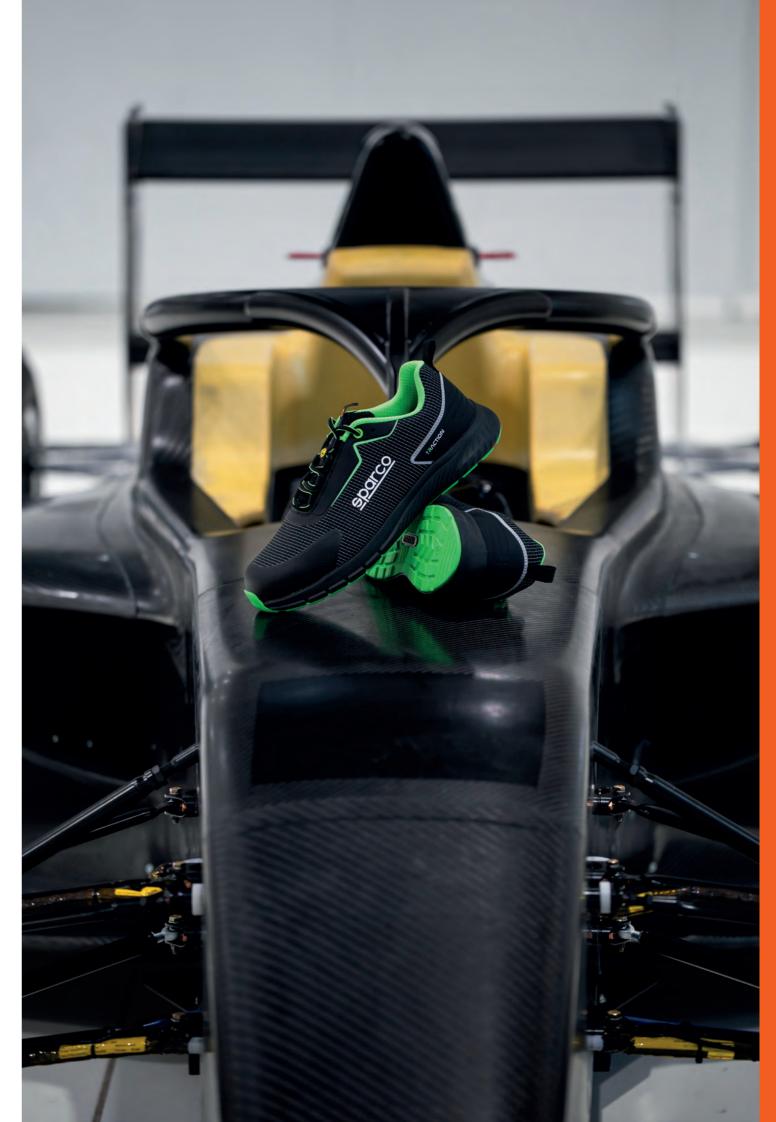





THE POWER OF PERFORMANCE

HEADQUARTERS

SPARCO S.p.A. Via Leini, 524 10088 Volpiano (TO) - Italy Tel. +39 011 22.40.716 e-mail: teamwork@sparco.it www.sparco-official.com

BRANCH

SPARCO TEAMWORK IBERIA, SL C/ Illa de Buda, 2 Polígono industrial Can Canals 08192 Sant Quirze del Vallés. Barcelona +34 93 806 54 94 info@iberia.sparcoteamwork.com



sparcoteamwork.com

